




New **FLOOR**
A D D I T I O N S

 ADEXUSA


FLOOR Glazed Porcelain Tiles



HEX SEMI-MATTE FINISH




ADFAI 600 5.5"x6.3"
Hex Aire



ADFSD 600 5.5"x6.3"
Hex Solano




ADFTE 600 5.5"x6.3"
Hex Terral



ADFMO 600 5.5"x6.3"
Hex Monzon




ADFBR 600 5.5"x6.3"
Hex Brisa



ADFLE 600 5.5"x6.3"
Hex Leaf




ADFPO 600 5.5"x6.3"
Hex Poniente



ADFSI 600 5.5"x6.3"
Hex Sirocco

RECTANGLE SEMI-MATTE FINISH

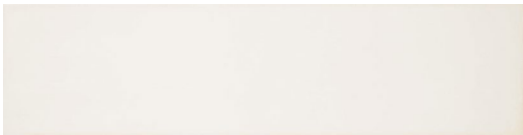

ADFAI 400 3.6"x14.5"
Rectangle Aire



ADFSD 400 3.6"x14.5"
Rectangle Solano



ADFTE 400 3.6"x14.5"
Rectangle Terral



ADFMO 400 3.6"x14.5"
Rectangle Monzon



ADFBR 400 3.6"x14.5"
Rectangle Brisa



ADFLE 400 3.6"x14.5"
Rectangle Leaf



ADFPO 400 3.6"x14.5"
Rectangle Poniente



ADFSI 400 3.6"x14.5"
Rectangle Sirocco

RECTANGLE MONZON **ADFMO**




RECTANGLE AIRE **ADFAI**



HEX SOLANO **ADF50**



RECTANGLE TERRAL **ADFTE**

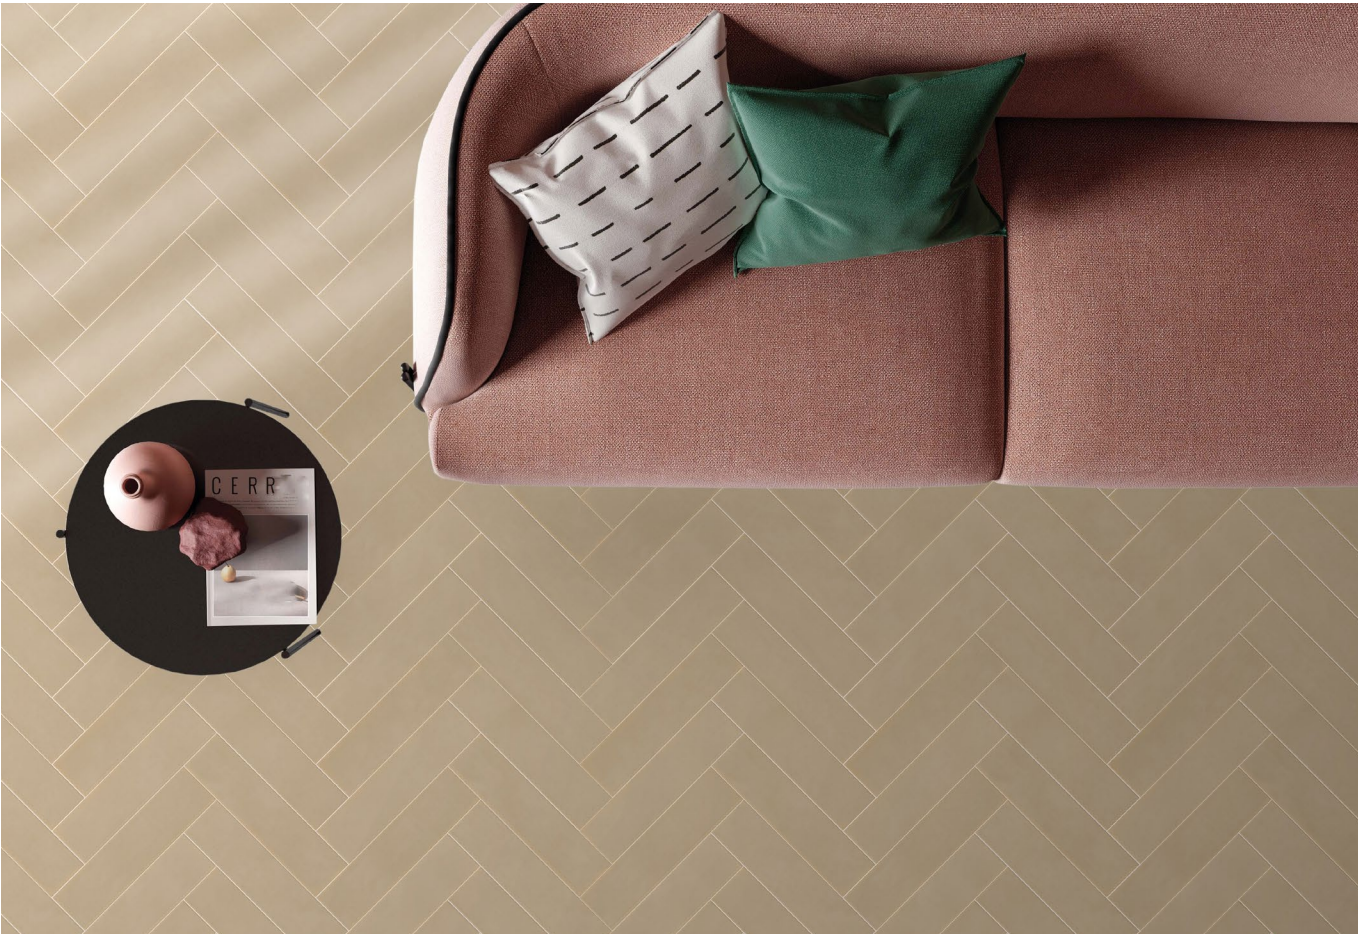

RECTANGLE AIRE **ADFAI**



TECHNICAL GUIDE



FIELD TILES	
SIZE	THICKNESS*
GLAZED PORCELAİN TILES	
Hex 5.5"x6.3"	0.335" (8.5mm)
Rectangle 3.6"x14.5"	0.335" (8.5mm)

APPLICATIONS		
	SUITABLE RESIDENTIAL	SUITABLE COMMERCIAL
Bathroom Walls	YES	YES
Shower Walls	YES	YES
Kitchen Walls	YES	YES
Countertops	YES	NO
Fireplace Surrounds	YES	YES
Outdoor Cooking / Bar Spaces (Non Freeze-Thaw Climates)	YES	YES
Pool Waterlines / Water Fountains	NO	NO
Floors	YES	NO
Steam Showers	YES	YES

PERFORMANCE CHARACTERISTICS			
	TEST METHOD ASTM / ISO	RESULT	
Target DCOF >0.42 Wet	ANSI A137.1	>0.42	
PEI Rating		Aire	4
		Solano, Terral, Monzon, Brisa, Leaf, Poniente	3
		Sirocco	2
Water Absorption	C-373 / 10545-3	Pass	
Breaking Strength	C-648 / 10545-4	Pass	
Stain Resistance	C-1378 / 10545-14	Resistant	
Chemical Resistance	C-650 / 10545-13	Resistant	
Facial dimensions	C-499 / 10545-2	Pass	
Range of Thickness	C-499 / 10545-2	Pass	
Warpage	C-485 / 10545-2	Resistant	
Freeze-Thaw Resistance	C-1026 / 10545-12	Resistant	

INSTALLATION	
GROUT JOINT RECOMMENDATION	SHADE VARIATION
Minimum of 5/64"	V2 - Slight Variation

CLEANING RECOMMENDATIONS
Routine with a non-abrasive/non-acidic, mild and PH neutral cleaner

CHARACTERISTICS	
Glaze	Solid
Surface Sheen	Semi-Matte
Texture	Smooth

*Thickness is understood as the highest point of the tile.
Due to the nature of our tile, a certain amount of variation in color, shading, surface and texture are to be expected.



CONTACT US

Corporate Headquarters South East Distribution Center

9450 N.W. 12th St.
Miami, FL 33172
Office: 305-513-4633
Fax: 305-513-4634
customerservice@adexusa.com

West Coast Distribution Center

1745 N. St. Thomas Cir.
Orange, CA 92865
Office: 714-773-0197
Fax: 714-773-9352
customerservicewest@adexusa.com

North East Distribution Center

1000 Wall St. W.
Lyndhurst, NJ 07071
Office: 201-355-8772
Fax: 201-636-2802
customerservicene@adexusa.com

www.adexusa.com

