


Main Street

Porcelain Stone®


Features and Benefits

- Ideal for commercial settings
- High DCOF and low maintenance
- Cross-Sheen® finish for easy cleaning available on UPS only
- Contemporary color palette
Coordinating Trim available in all colors
- Extremely durable for long-lasting beauty
- Crossville recommends a minimum grout joint of 3/16 inch
- Green SquaredSM Certified and Made in U.S.A.

Color Palette

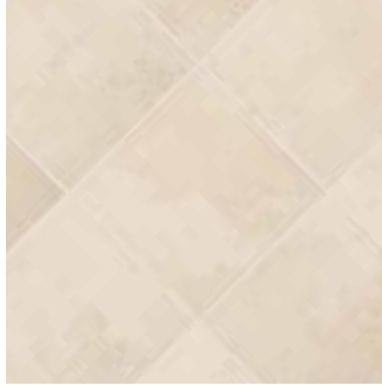


AV211 ▶ Cinema Champagne

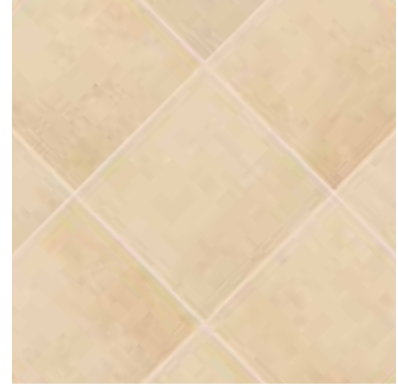


AV212 ▶ Café Caramel



AV213 ▶ Bistro Brown

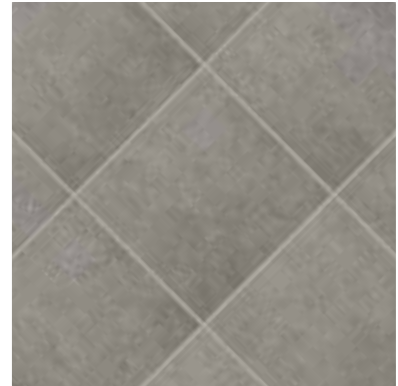

AV214 ▶ Gallery Grey

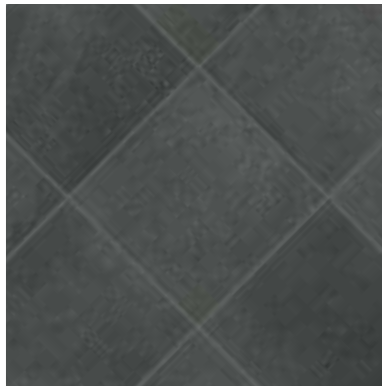

AV215 ▶ Boutique Black

Photo:

AV211 ▶ Cinema Champagne 6 x 6 UPS

AV214 ▶ Gallery Grey 6 x 18 UPS



AV215 ▶ Boutique Black 18 x 18 UPS



Main Street

Porcelain Stone®

Sizes (Shown in AV202 Arizona Brown)



2 x 2 Mosaics
(Mounted on an
11-13/16 x 11-13/16 sheet.)

Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment. See website for more details and sizes.



Sizes & Finishes

Field Tile - Calibrated

Available in all colors

Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
6 x 6†	5-13/16 x 5-13/16	3/8	3/16	UPS
6 x 18†	5-13/16 x 17-13/16	3/8	3/16	UPS
12 x 12	11-13/16 x 11-13/16	3/8	3/16	UPS
18 x 18	17-13/16 x 17-13/16	3/8	3/16	UPS

† The cut/bevel tile is cut from larger format tile and the edges are beveled to provide a factory appearance. Please allow two to eight weeks for delivery depending on Crossville's production schedule.

All field tile is calibrated (non-rectified).

Crossville recommends a minimum 3/16" grout joint.

Mosaics

Available in all colors


Nominal (in)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
2 x 2 Mosaics*	1-13/16 x 1-13/16	3/8	3/16	UPS

* 2 x 2 mosaic tile in 11-13/16 x 11-13/16 mounted sheets.

Coordinating Trim

Available in all colors

Nominal (mm)	Actual (in)	Thickness (in)	Grout Joint (in)	Finish
4 x 12 Single Bullnose	3-13/16 x 11-13/16	3/8	3/16	UPS
6 x 12 Cove Base	5-7/8 x 11-3/4	3/8	3/16	UPS



4 x 12 Bullnose



6 x 12 Cove Base

Product Performance


Breaking Strength	>400 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance	Unaffected	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.50%	ASTM C373
Scratch Hardness	7	Mohs Scale

Wet Dynamic COF

UPS	0.58 - 0.68	ANSI A326.3
-----	-------------	-------------

Shade & Texture Index

Main Street has a shade variation of V3.

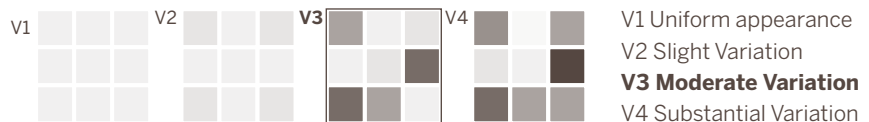

This porcelain tile product is produced with a V3 variation. Expect that the amount of color and texture on each piece may vary significantly. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.

Application Areas

Finish	Interior Floors (dry)	Interior Walls (wet/dry)	Exterior Walls	Interior Floors (Standing water/shower floors)	Exterior/Paving	Pool/Fountain Full Lining**	Water Line Pool/Fountains
UPS	✓	✓	✓	Mosaics Only*		✓	✓

* 4" or less in both length and width, UPS or UP mosaics

** Excludes mesh mounted mosaics. Crossville recommends face mounted or edge mounted mosaics for fully submerged applications. Contact your Crossville sales representative for more information.

NOTE: Trim applications will differ from field tile applications for the same series.

For more information on ANSI- A362.3 visit our website at <https://www.crossvilleinc.com/Resources/Tile-101/DCOF?tab=1>



Main Street

Crossville, Inc.

PO Box 1168
Crossville, TN
38557

Phone 931.484.2110
Fax 931.456.2956
E-Mail Crossc@CrossvilleInc.com
Web CrossvilleInc.com

Recommended Use

Main Street is recommended for interior floors, interior walls, countertops, exterior walls, pool waterlines and full linings[†] in both residential and commercial applications. Main Street is not recommended for exterior horizontal surfaces or exterior paving. See CrossvilleInc.com for detailed installation instructions.

[†]Excludes mesh mounted mosaics.

Care and Maintenance

Regular cleaning is the best way to keep Main Street tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville® products is available at CrossvilleInc.com.

Wet area use for Main Street mosaics

Crossville® produces the Main Street mosaics with the Cross-Sheen® (UPS) finish. The AcuTestsm Wet Dynamic COF of the Main Street UPS finish is $\geq .58$. Their small sizes ensure frequent grout joints which provides traction and drainage. Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Main Street to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

Information listed here is subject to change. Please refer to CrossvilleInc.com for the latest, most accurate information.

Crossville® Sample Express

Visit the website to learn more:
CrossvilleInc.com/Products/Main-Street

Loose Tile Samples

Sizes may vary depending on product series
Max. of 4 large field tile per order

Standard Shipping

FedEX Ground

National Accounts

For over 20 years we have been offering Porcelain tile to commercial customers at National Accounts pricing programs with special discounts. The National Accounts department provides materials forecasting, sales support and samples.

CrossvilleInc.com

If you want a better idea of what Crossville tile would look like in a particular room setting, simply visit our website and click on Cross-Vision. This powerful software tool allows you to visualize different types of Crossville tile. In addition, you'll find comprehensive information about Crossville's entire portfolio of products. You can also learn about the latest styles and trends from industry experts, download detailed care and maintenance instructions for our various products, or browse electronic versions of Crossville's product brochures. So whether you need information about Crossville products or tile in general, please visit us at CrossvilleInc.com.

Our Warranty

Crossville Inc. guarantees that its products will meet or exceed the performance specifications outlined in ANSI A137.1-2022 and in the performance data section of the Crossville, Inc. general product catalog. For complete details check our website at CrossvilleInc.com.



AV212 ▶ Café Caramel 18 x 18

Trade Organizations



Environmentally Aware

