

UNDERCOAT

Warm and rustic, Undercoat features carved organic striations in different lengths and widths. Recalling hand-applied plaster or palette-knife painting, Undercoat revels in its variation. Offered in three honed colorways—Bianco Antico Marble, Rosa Perlino Marble, and Belgian Bluestone. Each piece is unique and may include open veins. Stocked in a 12" x 24" x 3/8" dimensional tile.



UNDERCOAT




Bianco Antico



Belgian Bluestone



Rosa Perlino

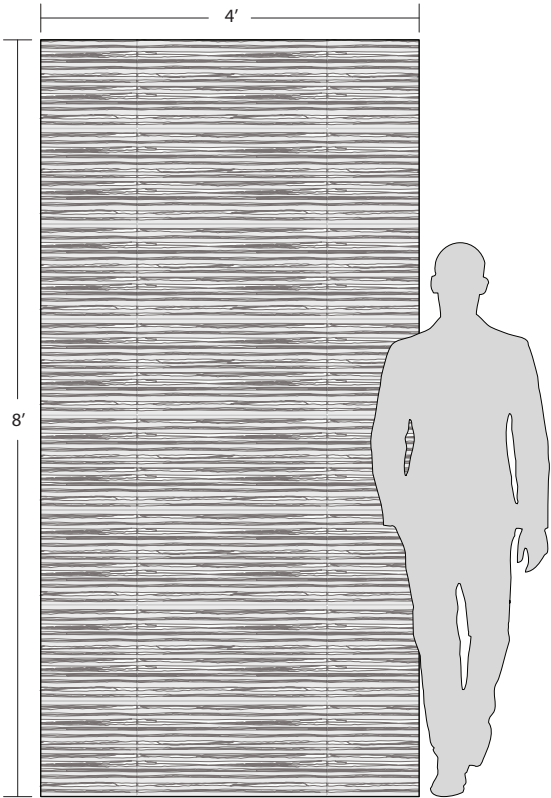

APPLICATIONS									VARIATION				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	V1	V2	V3	V4	CARPET CUTTING	FIELD
No	All	Conventional Only ¹	No	No	No	No	No	Yes					FINISH	MOSAIC
													SADDLE	VANITY TOP
													WATERJET	

INSTALLATION/MAINTENANCE										AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Ardex N23 White Microtec Rapid Set ²	Ardex FG-C Microtec Unsanded ³	1/16" Min.	Ardex 8 + 9	Ardex SX	Aquamix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook	Maintain Tile Orientation	Required		12" x 24" x 3/8"
NOTES											
¹ Do not install tiles with large open veins under running water or on the wall with shower head fixtures. ² Alternate setting materials: Ardex X77 White Microtec Fiber Reinforced Mortar or Ardex 100% Solids Epoxy Adhesive White Recommended setting material for Belgian Bluestone is Ardex X77 White Microtec Fiber Reinforced Mortar Alternate setting materials for Belgian Bluestone are Ardex X5 White Medium Bed Mortar or Ardex 100% Solids Epoxy Adhesive White ³ Alternate grout: Ardex FL Rapid Set Sanded or Mapei Keracolor Unsanded Tech Note: Product MUST be installed in accordance with current TCNA Handbook Stone Methods. Please be aware that veins in Bianco Antico may open if used in showers and other wet areas. This textured natural stone will have imperfections where the carving meets open veins. Expect each piece to look slightly different and rustic as this is a hand-finished product. Dry laying of this product prior to installation is required. Allow for variation in piece-to-piece alignment. Pattern is asymmetrical, maintain orientation of pieces for continuity of pattern. White mortar is recommended for natural stone. Seal and utilize a grout release prior to grouting. Bag grouting should be considered with this tile.											