

# CARMEN

true tiles

## TOSCANA COTTON 6,5X20

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039255</b>	6,5X20	8,80	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

# CARMEN

true tiles

## HEXA TOSCANA COTTON 13X15

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039345</b>	13X15	8,50	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	0.00
Slip resistance (R)	EN 16165-B	R10

# CARMEN

true tiles

## TOSCANA ASH 6,5X20

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039258</b>	6,5X20	8,80	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

# CARMEN

true tiles

## HEXA TOSCANA ASH 13X15

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039348</b>	13X15	8,20	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (R)      EN 16165-B      R10

# CARMEN

true tiles

## TOSCANA GHOST GREEN 6,5X20

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039261</b>	6,5X20	9,30	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

## HEXA TOSCANA GHOST GREEN

### 13X15



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039351</b>	13X15	8,40	PC BIB

#### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

#### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

#### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alkalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

#### ANTI-SLIP CHARACTERISTICS

Slip resistance (R)	EN 16165-B	R10
---------------------	------------	-----

# CARMEN

true tiles

## TOSCANA HOT PINK 6,5X20

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039256</b>	6,5X20	9,10	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

# CARMEN

true tiles

## HEXA TOSCANA HOT PINK 13X15

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039346</b>	13X15	8,40	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (R)      EN 16165-B      R10



# CARMEN

true tiles

## TOSCANA HERB 6,5X20

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039260</b>	6,5X20	8,80	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

# CARMEN

true tiles

## HEXA TOSCANA HERB 13X15

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039350</b>	13X15	8,50	PC BIB

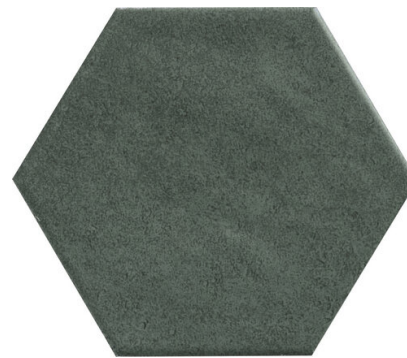

### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (R)      EN 16165-B      R10

# CARMEN

true tiles

## TOSCANA LAKE BLUE 6,5X20

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039259</b>	6,5X20	8,60	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

# CARMEN

true tiles

## HEXA TOSCANA LAKE BLUE 13X15

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
<b>A039349</b>	13X15	8,60	PC BIB



### DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality      UNE-EN 14411      It accomplished all requirements

### PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	0,5% < E < 3%
Flexion resistance	EN ISO 10545-04	=> 47,9 N/mm <sup>2</sup>
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

### CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

### ANTI-SLIP CHARACTERISTICS

Slip resistance (R)      EN 16165-B      R10