

# Access Point™ LVT

## Luxury Vinyl Tile



### Available Wood Looks Colors



**Oak Pewter**  
Low Gloss  
2 mm: 3P108641  
2.5 mm: 3P208641



**Walnut Fudge**  
Low Gloss  
2.0 mm: 3P107641  
2.5 mm: 3P20764



**Hickory Caramel**  
Medium Gloss  
2.0 mm: 3P103641  
2.5 mm: 3P203641



**Rustic Oak Dunescape**  
Medium Gloss  
2.0 mm: 3P102641  
2.5 mm: 3P202641



**Oak Silver**  
Low Gloss  
2.0 mm: 3P105641  
2.5 mm: 3P205641



**Oak Sunset**  
Low Gloss  
2.0 mm: 3P104641  
2.5 mm: 3P204641



**Oak Sunrise**  
Low Gloss  
2.0 mm: 3P106641  
2.5 mm: 3P206641



**Rustic Oak Nightfall**  
Medium Gloss  
2.0 mm: 3P101641  
2.5 mm: 3P201641

### Available Textile Looks Colors



**Linen Storm**  
Medium Gloss  
2.0 mm: 3P109821  
2.5 mm: 3P209821-



**Linen Flax**  
Medium Gloss  
2.0 mm: 3P110821  
2.5 mm: 3P210821



**Stone Thistle**  
Medium Gloss  
2.0 mm: 3P111821  
2.5 mm: 3P211821



**Stone Biscotti**  
Medium Gloss  
2.0 mm: 3P112821  
2.5 mm: 3P212821

### Features and Benefits

- Manufactured in the US\*, Access Point LVT Luxury Flooring offers a balance of performance, design and price – and is just a truck delivery away
- Performance has been strengthened with Urethane Plus coating to provide enhanced resistance to scratches, stains and scuffs compared to standard urethane coatings.
- Sophisticated fabric designs in subtle neutral tones on a tile format, and an array of wood species, and even a stone-inspired wood plank to balance the collection.
- Suited for areas where commercial flooring performance is a requirement and can be used in light commercial spaces.

\* Manufactured in the US with imported raw materials

# Access Point™ LVT

## Luxury Vinyl Tile



### Product Information

**Construction** - Solid Vinyl Tile (Luxury Vinyl Tile / LVT)

**International Specifications** - ASTM F1700, Class III, Type B embossed surface

**Overall Thickness** - 0.100 in. (2.5 mm); 0.080 in. (2.0 mm)

**Wear Layer Thickness** - 0.020 in. (0.5 mm); 0.012 in. (0.3 mm)

**Factory Finish** - Urethane Plus

**Installation** - Armstrong Flooring™ Adhesives: S-995, S-319 Roll Strong™, S-1000

**Maintenance Options** - No Polish - No Buff, Polish Optional

### Sizes & Finishes

#### Available Tile Size

Nominal (in)	Actual (mm)	Overall Thickness (mm)	Wear layer Thickness (mm)
6 x 48 - Wood Looks	152.4 x 1219.2	2.0 & 2.5	0.3 & 0.5
18 x 18 - Textile and Stone Looks	457.2 x 457.2	2.0 & 2.5	0.3 & 0.5

#### Available Trim

Nominal (in)	Actual (mm)	Overall Thickness (mm)	Wear layer Thickness (mm)
1.6 x 94 Multi-Function Trim	40.38x2387.6	NA	NA

### Product Performance

	Results	Test
Thickness	Nominal ± 0.005 in	ASTM F386
Wear Layer Thickness (2.5mm)	0.020 in. (0.5 mm) minimum for Commercial Ues	ASTM F410
Size	± 0.016 in. per linear foot	ASTM F2421/F2055
Squareness	0.010 in. maximum	ASTM F2421/F2055
Residual Indentation	Average less than 8%	ASTM F1914
Dimensional Stability	± 0.018 in. per linear ft. MD, < 0.012 in. per lin. ft. AMD	Internal
Chemical Resistance	No more than slight change in surface dulling, attack or staining	ASTM F925
Resistance to Heat	ΔE < 8	ASTM F1514
Resistance to Light	ΔE < 8	ASTM F1515
Static Load Resistance @ 250	< 0.005 in.	ASTM F970
Additional Testing	Results	Test
Static Load Resistance	≤ 0.005 in. 2000 psi	ASTM F970*
Fire Test - Flame Spread	0.45 W/cm2 or more Class 1	ASTM E648
Fire Test - Smoke Evolutoin	450 or less	ASTM E48
Fire Test Data - Canada Access Point 2.5mm	CAN/ULC S-102.2	Flame Spread - 5 Smoke Developed - 75
Fire Test Data - Canada Access Point 2.0mm	CAN/ULC S-102.2	Flame Spread - 0; Smoke Developed - 50
SCOF**	≥ 0.5	ASTM D2047/UL 410
ADA Standards for Accessible Design	Meets	Chapter 3, Section 302.1

\*Testing at loads above 250 psi is outside the scope of the test method. Since testing is conducted on uninstalled flooring, results do not consider the performance of the adhesive, underlayment, or subfloor. These test results are not an indicator of the installed flooring system performance.

\*\*Using the James Machine as described in D2047 and as directed in UL 410 for floor covering materials (FCM) using a leather foot under dry conditions. The application of site-applied floor sealers, polishes and other types of finishes routinely used to maintain resilient flooring materials will change the walking surface and consequently the SCOF value.

### Application Areas

Finish	Interior Floors (dry)	Interior Walls (wet/dry)	Exterior Walls	Interior Floors (Standing water/shower floors)	Exterior/Paving	Pool/Fountain Full Lining**	Water Line Pool/Fountains
Access Point 2.0 LVT	✓						
Access Point 2.5 LVT	✓						

# Access Point™ LVT

## Crossville

PO Box 1168  
Crossville, TN  
38557

**Phone** 931.484.2110  
**Fax** 931.456.2956  
**E-Mail** [Crossc@CrossvilleInc.com](mailto:Crossc@CrossvilleInc.com)  
**Web** [CrossvilleInc.com](http://CrossvilleInc.com)

### Recommended Use

Access Point LVT 2.5 mm for dry areas where commercial flooring performance is a requirement. Access Point LVT 2 mm for light commercial spaces, Main Street businesses, and residential areas in mixed use properties.

### Building Better

We share your commitment to transparency and building a better environment together.

- Low VOC emissions and FloorScore® certified
- Free of ortho-phthalates and heavy metals
- Health Product Declaration (HPD) and third-party certified Environmental Product Declaration (EPD) available
- Made in the USA with global and domestic content

### Limited Warranty

**Access Point LVT 2.5 mm:** 15-year Commercial/30-year Residential Warranty when installed in strict accordance with the detailed instructions.

**Access Point LVT 2.0 mm:** 7-year Commercial/ 15-year Residential Warranty when installed in strict accordance with the detailed instructions.

### Care and Maintenance

Regular cleaning is the best way to keep Access Point LVT looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville® products is available at [CrossvilleInc.com](http://CrossvilleInc.com).

*Information listed here is subject to change. Please refer to [CrossvilleInc.com](http://CrossvilleInc.com) for the latest, most accurate information.*

### ▶▶ Crossville® Sample Express

#### Visit the website to get samples:

[CrossvilleInc.com/Products/Access-Point-LVT](http://CrossvilleInc.com/Products/Access-Point-LVT)

#### Loose LVT Samples


Sizes may vary depending on product series  
Max. of 4 samples per order

#### Standard Shipping

FedEx Ground

### More Information about LVT

Visit [FloorExpert.com](http://FloorExpert.com) or call **1-855-243-2521** for Product, Technical, Adhesives, Installation and Maintenance recommendations.

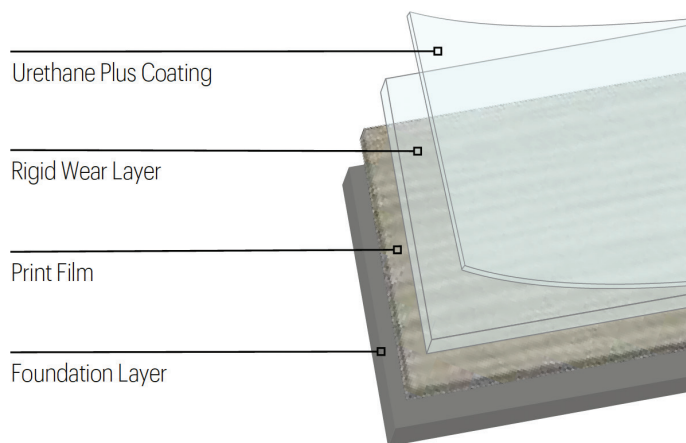

- New Armstrong Flooring™ Urethane Plus coating provides enhanced resistance to scratches, stains and scuffs compared to standard urethane coatings.
- Paired with Armstrong Flooring™ S-1841 Quiet Comfort Floating Underlayment, or Armstrong Flooring™ S-1840 Quiet Comfort Luxury Flooring Underlayment is ideal for spaces where noise reduction is important.

Printed in USA. | Armstrong Flooring™ and the Armstrong Flooring™ logo are under license from AWI Licensing, LLC. FloorScore™ is a trademark of the Resilient Floor Covering Institute, Inc. All other marks belong to AHF, LLC, its affiliates, or subsidiaries. | © 2024 AHF, LLC. NOTE: Due to printing limitations, colors pictured cannot be guaranteed to match actual flooring material.

### Environmentally Aware

