




Log Placement Instructions

Models: HO18-R, HO24-R, HO30-R

▲WARNING!

The positioning of the logs is critical to the safe, clean operation of this gas log set. Sooting and other problems may result if the logs are not properly positioned per these instructions. Failure to position in accordance with the diagrams below, or failure to use only parts specifically approved for this log set may result in property damage or personal injury.

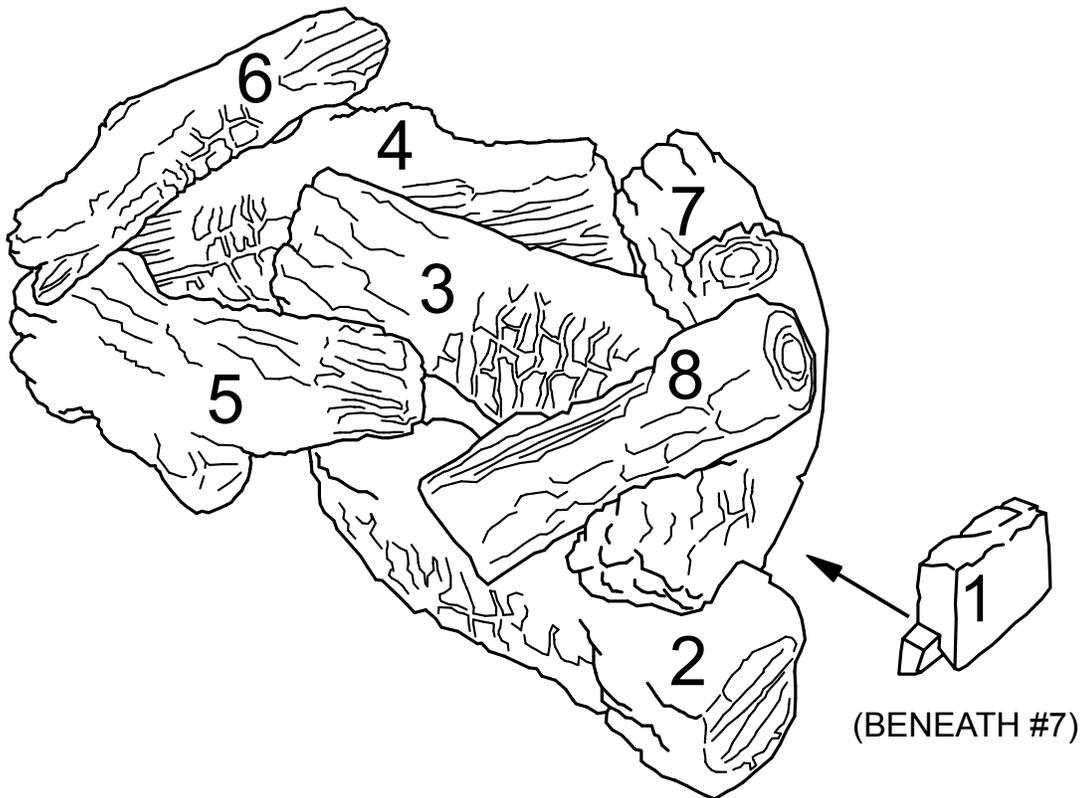

Item	Description	Qty.	HO18-R	HO24-R	HO30-R
1.	Ember Chunk	1	81D0110	81D0110	81D0110
2.	Right Front Log	1	81D0011	81D0019	81D0027
3.	Right Rear Log	1	81D0012	81D0020	81D0028
4.	Left Rear Log	1	81D0013	81D0021	81D0029
5.	Left Front Log	1	81D0014	81D0022	81D0030
6.	Left Top Log	1	81D0015	81D0023	81D0023
7.	Right Top Log	1	81D0016	81D0024	81D0024
8.	Right Front Log	1	81D0017	81D0025	81D0025

INSTALL 18", 24" AND 30" (F,R) HIGHLAND OAK LOGS ON NATURAL BLAZE BURNER

NOTE: Installation instructions are the same for 18", 24", and 30" log sets. Pictures used in this manual illustrate the 24" set. Some variation may exist between the images and the set.

1. Place the #1 log (the "chunk") on the grate bar right side of the burner adjacent to the controls. Figure 1

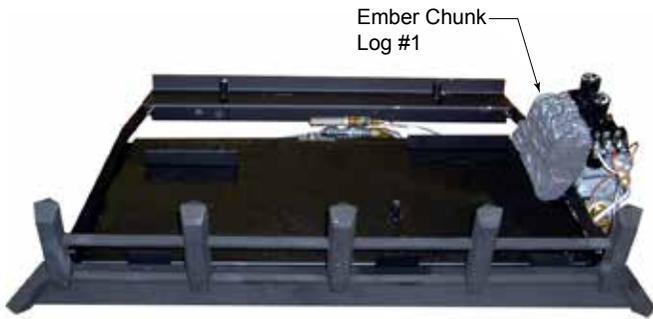


Figure 1

2. Place front right log (#2) on right pin located on burner and right grate bar. Figure 2. After placing front right log, ensure log is fully upright and tilting towards the back of the burner.

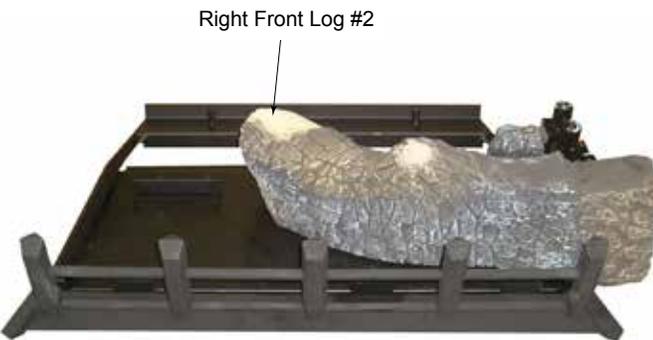


Figure 2

3. Place right rear log (#3) on pin located on rear support bracket and rest left side of log on front right log. Figure 3. After placing right rear log, ensure log is fully upright and does not tilt forward. Slide #1 log ember chunk back to contact right rear log.



Figure 3

4. Place left rear log (#4) on pin located on rear support bracket on left side and left grate bar. Figure 4



Figure 4

5. Place left front log (#5) on left pin located on burner and left grate bar. Rest top right portion of log on right front log. Figure 5



Figure 5

- Place top left log (#6) on left rear log (#4) and left front log (#5) using locating grooves on bottom of #6 and locating blocks on logs #4 and #5. Figure 6
- Place right top log (#7) on right rear log (#3) and right front log (#2) using locators on the bottom of log #7 and locators on logs #2 and #3. Figure 6

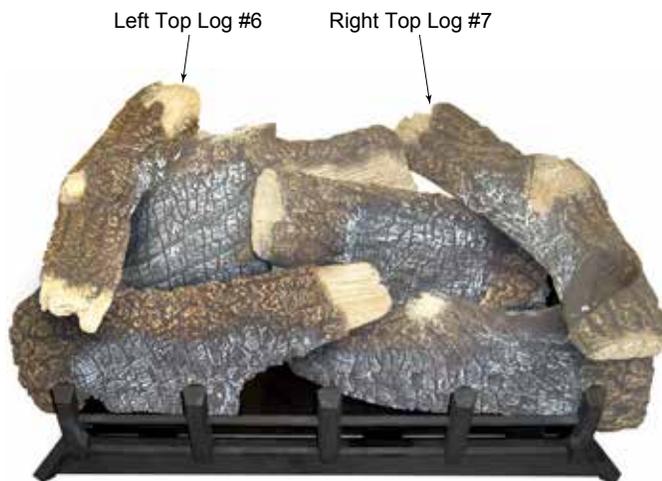


Figure 6

- Place small right front top log (#8) on log #7 and log #2 using locating grooves on the bottom of log #8 and locating blocks on log #7 and log #2. Figure 7



Figure 7

PLACE THE DECORATIVE ROCK

Optional volcanic rock may be placed around the unit on the floor of the firebox. Be sure to avoid any areas on the burner itself.

CAUTION

DO NOT sprinkle volcanic rock on the logs, around the pilot, or on or near burners. This may cause sooting. Place volcanic rock only on the floor of the fireplace.

During initial operation of the new heater, new burning logs and/or rock wool will give off a paper burning smell and orange flames will be present. Simply open the windows for a few hours to vent the odor.



LOVE AT FIRST LIGHT

Monessen, a brand of Hearth & Home Technologies
 7571 215th Street West, Lakeville, MN 50444
www.monessenhearth.com