

# CANYONLAND

---

Inspired by a distinctive sedimentary stone quarried in Italy's Apennine mountains, Canyonland Porcelain renders its unique look in a versatile porcelain format. Available in textured and matte finishes, this collection offers a refined sedimentary rock aesthetic in a fresh palette of White, Beige, and Grey. Available in large-format 24" x 48" rectified tiles, Canyonland delivers a fluid, elevated look for modern spaces.



# CANYONLAND


*Matte*



*Beige*



*Grey*

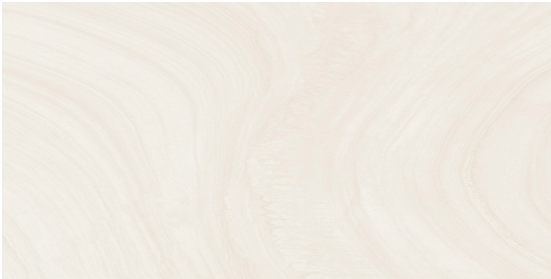

*White*

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	<div><div><div>V1</div><div>V2</div><div>V3</div><div>V4</div></div><div></div></div>		CARPET CUTTING	
Commercial Light/ Medium	All	Yes, including steam	Yes, including steam	No	Yes, including freeze thaw	No	Yes	Yes			FIELD	
											FINISH	
											MOSAIC	
											SADDLE	
VANITY TOP												
WATERJET												
INSTALLATION/MAINTENANCE											AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE	<div><div></div><div>RECTIFIED FIELD TILE 24" X 48" X 3/8" Matte</div></div>	
rdex X77 White Microtec Fiber Reinforced Mortar <sup>1</sup>	Ardex FL Rapid Set Sanded <sup>2</sup>	1/16" minimum	Ardex B + 9	Ardex SX Silicone Sealant	AquaMix Grout Release	AquaMix Concentrated Cleaner	TCNA Handbook	Max. 33% Offset	Recommended			
NOTES												
<div><div><div><sup>1</sup> Alternate setting material: Ardex X5 White Medium Bed Mortar or Mapei Ultraflex LFT White</div><div><sup>2</sup> Alternate grout: Ardex FG-C Microtec Unsanded or Mapei Ultracolor Plus FA</div></div><div>Tech notes: Product MUST be installed in accordance with current TCNA Handbook tile methods. Dry laying of this product prior to installation is recommended. Per TCNA guidelines, running bond/brick joint patterns to be set with a max. offset of 33% and min. grout joint of 1/16", unless otherwise approved by owner. Grout release can be utilized prior to grouting.</div></div>												



# CANYONLAND

Textured



Beige



Grey



White

APPLICATIONS									VARIATION		TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND	<div><div>V1</div><div>V2</div><div>V3</div><div>V4</div></div> <div></div>		CARPET CUTTING	FIELD
No	All	Yes, including steam	No	No	Yes, including freeze thaw	No	No	Yes			FINISH	MOSAIC
											SADDLE	VANITY TOP
											WATERJET	
INSTALLATION/MAINTENANCE											AVAILABLE SIZES	
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT	QR CODE	<div><div></div><div>RECTIFIED FIELD TILE 12" X 24" X 3/8" Textured</div></div>	
Ardex X77 White Microtec Fiber Reinforced Mortar <sup>1</sup>	Ardex FL Rapid Set Sanded <sup>2</sup>	1/16" minimum	Ardex B + 9	Ardex SX Silicone Sealant	AquaMix Grout Release	AquaMix Concentrated Cleaner	TCNA Handbook	Max. 33% Offset	Recommended			
NOTES												
<sup>1</sup> Alternate setting material: Ardex X5 White Medium Bed Mortar or Mapei Ultraflex LFT White												
<sup>2</sup> Alternate grout: Ardex FG-C Microtec Unsanded or Mapei Ultracolor Plus FA												
Tech notes: Product MUST be installed in accordance with current TCNA Handbook tile methods. Dry laying of this product prior to installation is recommended. Porcelains that meet the DCOF standard may have a more abrasive surface that might show dirt or debris. Remove with soap, water and firm scrubbing in order to clean. Consider this in the selection process. Per TCNA guidelines, running bond/ brick joint patterns to be set with a max. offset of 33% and min. grout joint of 1/16", unless otherwise approved by owner. Grout release can be utilized, and bag grouting may be considered.												