



BLANC OLD COUNTY LEDGE

R

Mhere quality — CRAFTSMANSHIP is a way of life...

CRAFTSMANSHIP

in every

Jetail

MOONLIT FOREST OLD COUNTY LEDGE













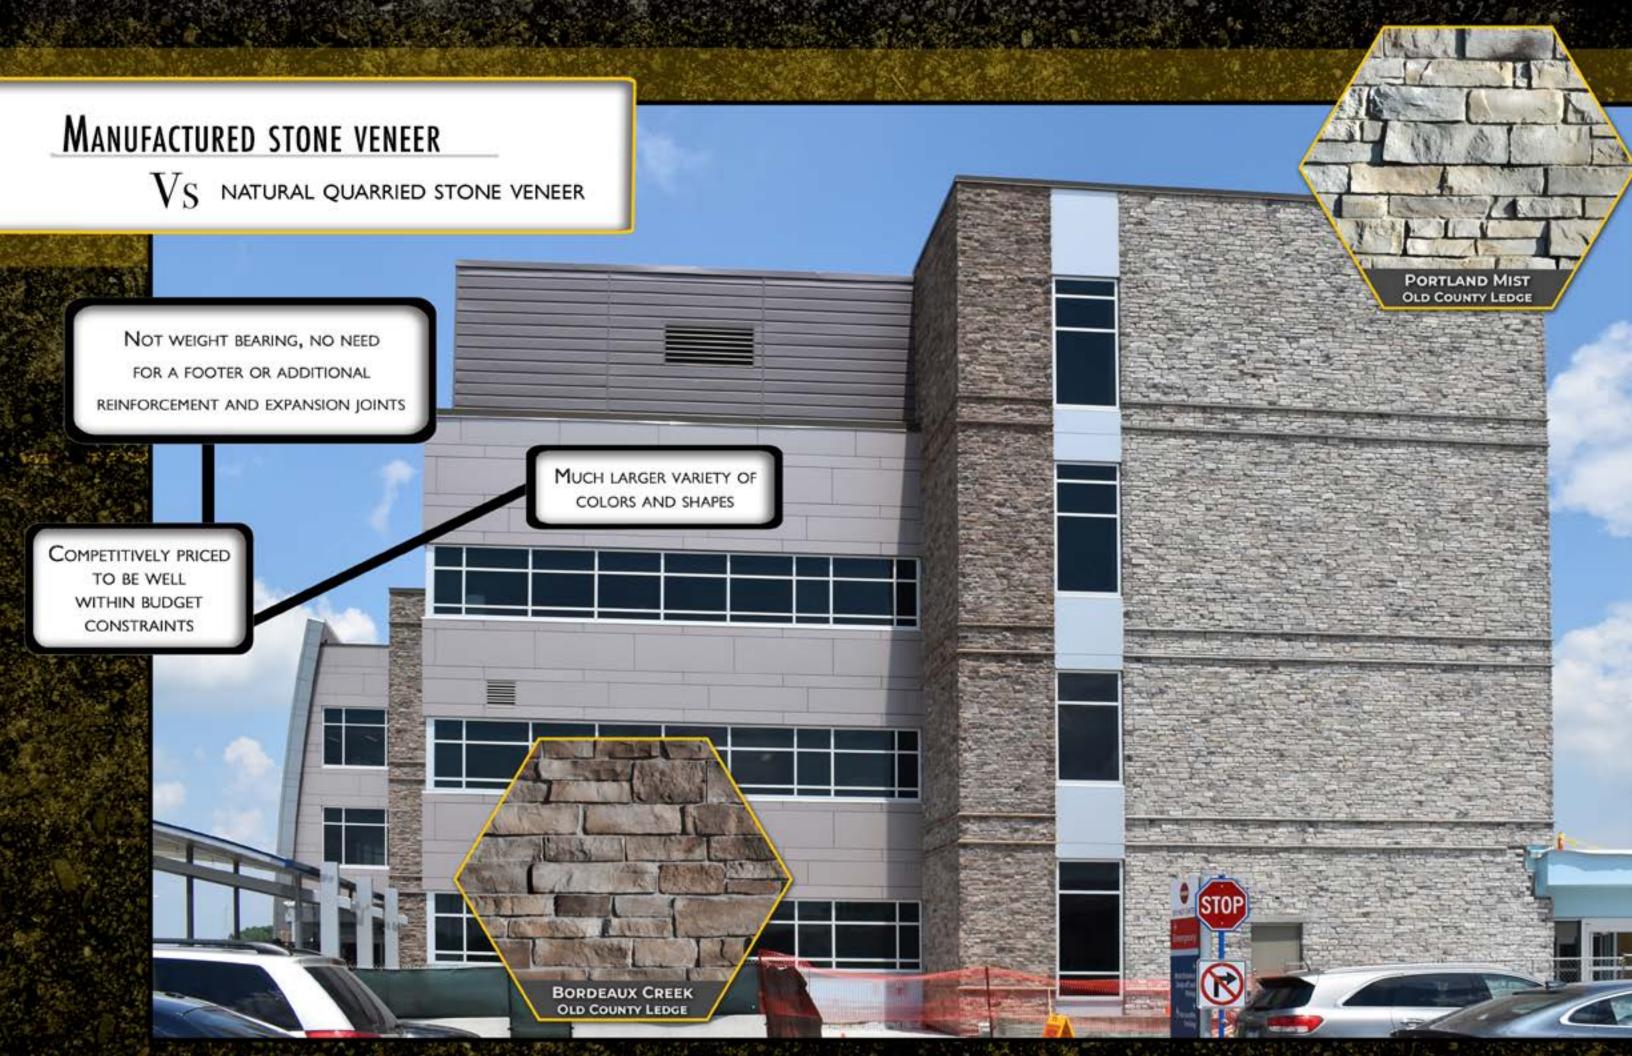

FEATURED COMMERCIAL APPLICATIONS





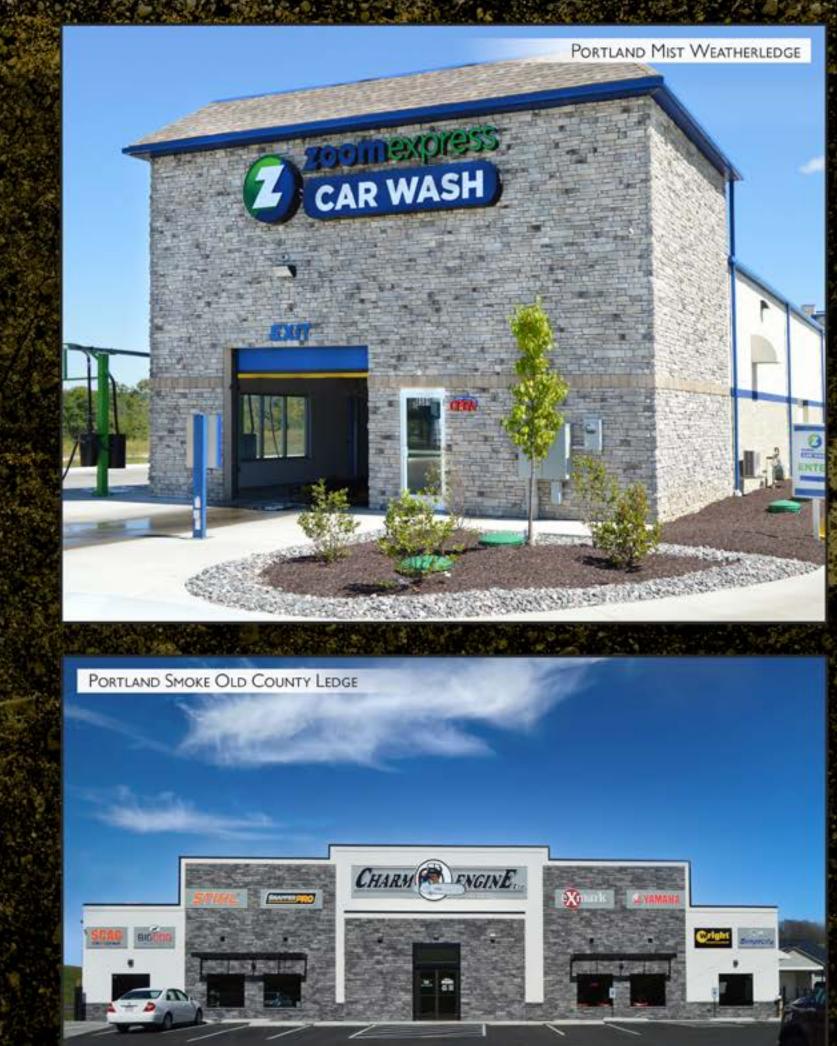

FEATURED RESIDENTIAL APPLICATIONS

BLUEGRASS FIELDSTONE AND LEDGESTONE

IMPERIAL PRO STACK





FEATURED RESIDENTIAL APPLICATIONS

JACKSON CREEK WEATHERLEDGE



3





KODIAK RIDGE WEATHERLEDGE



Weatherledge ranges from 1 ½ inches to 6 inches tall and 4 inches to 23 ½ inches long.







-With smooth faces and a modern, angular edge, Old County Ledge is the stone of choice for those seeking an orderly look.

This series is a well-organized combination of varied sizes and texture, but with an undeviating line.



Old County Ledge ranges in size from 1 ½ to 7 inches tall by 4 to 23 ½ long.





-With a modern look that contains clean and contemporary lines, our Pro Stack brings you the most current style. The panels are uncluttered, long, and straight-edged.

Simple yet dynamic, this choice of stone gives you the orderly, unfettered look you've been seeking.

IMPERIAL PRO STACK

日本の日本

Pro Stack panels are 3 inches tall, 6 to 23 ½ inches long, and I inch deep.

MOONLIT FOREST PRO STACK

CUMBERLAND FOG PRO STACK

> PORTLAND MIST PRO STACK

BUCK COUNTRY PRO STACK

> NATURAL PRO STACK







Let Bank





-With a stylish and edgy feel, Quarry Cut fits the bill when you want a well-arranged look.

Chic and cultivated with its stack ledge and smaller thin pieces, it brings you uniform lines and diverse color. Perfect for a distinct look to set your design apart.

1.





BRAEMAR Dressed Ashlar



<u>RESSED</u>ASH

-Dressed Ashlar's straight lines and squared edges will give your next project a strong consistency that exudes culture and refinement.



-Southern Limestone's traditional look gives projects a bold and strong appearance. They are a more natural cut, making it the perfect addition.



Southern Limestone is approximately 2 ½ inches to 16 inches tall by 5 inches and up to 23 ½ inches long.



-Salvaged Wood Stone has the following sizes included in the box: (Not sold by the individual piece)

> 3 - 8.5" x 32" 3 - 7" x 32" I — 8.5" x 20" — 8.5" x 12" — 7" x 20" - 7" x 12"

NATURAL SALVAGED WOOD STONE



BUCK COUNTRY FIELDSTONE

PORTLAND SMOKE FIELDSTONE


T

REAL OF




FARMHOUSE THIN VENEER BRICK

Z

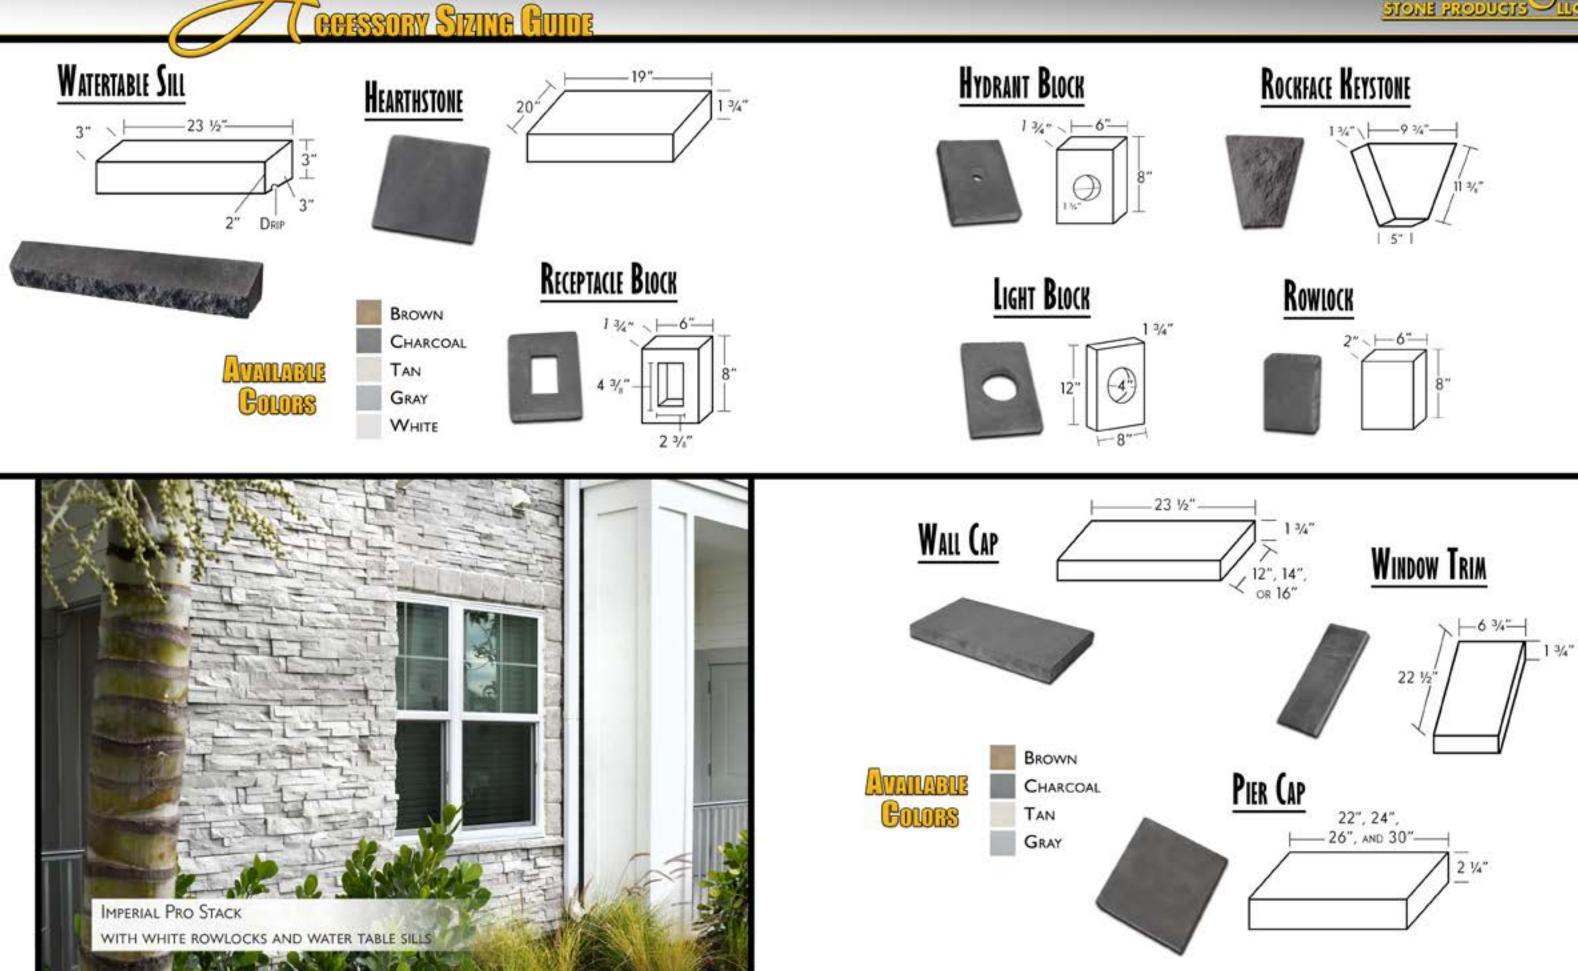





| | | SSUM_CULUKIN | I A A A A A A A A A A A A A A A A A A A | 2 | | |
|-------------------|--------------|--------------|---|-----------|------------|--------------------|
| COLOR | WEATHERLEDGE | LEDGESTONE | OLD COUNTY LEDGE | Pro Stack | FIELDSTONE | SOUTHERN LIMESTONE |
| BLUEGRASS | | | | | | |
| BUCK COUNTRY | | | | | | |
| CHARCOAL | | | | | | |
| Kodiak Ridge | | | | | | |
| Portland Smoke | | | | | | |
| Tan | | | | | A A A | |

CHERSSORY GOLOR REFERENCE CUIDE

ALL COLORS LISTED HERE ARE FOR SUGGESTION ONLY AND ARE SOLELY AT THE DISCRETION OF THE USER. FOR COLOR, PLEASE REFERENCE STONE SAMPLES OR CURRENT INSTALLATIONS FOR COLOR REPRESENTATION.





| (| | SURACULURAN | | | | |
|-------------------|--------------|-------------|------------------|----------------------------|--------------|------------|
| COLOR | WEATHERLEDGE | QUARRY CUT | OLD COUNTY LEDGE | Color | WEATHERLEDGE | So |
| Portland Mist | | | | | | |
| Moonlit Forest | | | | Burnt Russet | | Carl Carl |
| Natural | | | | Sequoia | | |
| Portland Dusk | | | | Portland Smoke / Smokey | | |
| Jackson Creek | | | | | | 14330 2 24 |
| Imperial | | | | | | |

CREESSORY BOLOR BEERENDE BUDE

ALL COLORS LISTED HERE ARE FOR SUGGESTION ONLY AND ARE SOLELY AT THE DISCRETION OF THE USER. FOR COLOR, PLEASE REFERENCE STONE SAMPLES OR CURRENT INSTALLATIONS FOR COLOR REPRESENTATION.





| | | SSURVLEURUR | | ξ. | | | |
|-------------------|-------------------|-------------|------------------|------------------|-----------------------|--------------------|---|
| COLOR | WEATHERLEDGE | LEDGESTONE | OLD COUNTY LEDGE | SUGGESTED COLORS | COLOR | Pro Stack | |
| BLANC | | | | GRAY | Cumberland Fog | | |
| Bordeaux Creek | | | | TAN BROWN | Mesa Cream | | |
| Desert Hollow | | | | TAN BROWN | COLOR | Southern Limestone | (|
| | | | | | ASPEN | | |
| Harvest | | | | TAN BROWN | | | |
| | | | | | BRAEMAR | | |
| Monterey | | | | BROWN | | | 3 |
| | | | | | Ohio White Vein | | |
| Santa Fe | | | | TAN BROWN | | | |
| | | | | | WEXFORD | | |
| | ALL COLORS LISTED | | | 1000 | | | |

CHARSSORY GOLOR REFERENCE PUIDE


ALL COLORS LISTED HERE ARE FOR SUGGESTION ONLY AND ARE SOLELY AT THE DISCRETION OF THE USER. FOR COLOR, PLEASE REFERENCE STONE SAMPLES OR CURRENT INSTALLATIONS FOR COLOR REPRESENTATION.



INSTALLATION INSTRUCTIONS

WARRANTY INFORMATION

1. INSTALLATION OVER WOOD FRAMING

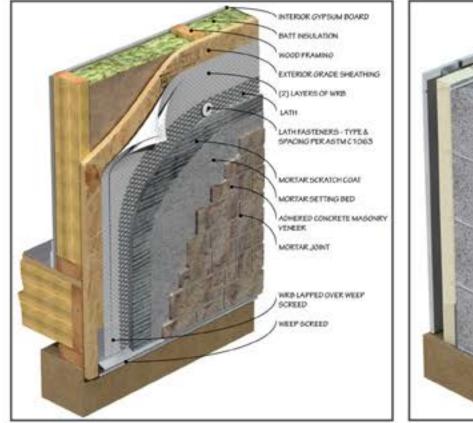

TERIOR GYPTILM BOARD URRING OR CHANNE SOID INSULATION CONTREMPORATION OF CMU BACKUP ATHIOPTIONAL ATH FASTENER - TYPE & SPACING PER ASTM C1063 ADREAK SOKATCH COAT ADREAR SETTING NED DHERED CONCELLE MANONE VENNER ORTARION WEEP SCREED (OPTIONAL)

APPLYING THE STONE

Install corners first. Spread mortar evenly on the back

the stone to the wall, move the stone back and forth a little

dry or too wet for proper bonding. In hot weather you may need to wet down the back of the stone or the scratch coat.

GROUTING INSTRUCTIONS

Use a grout bag to grout the joints, making sure you do not get cement on the face of the stone. Let the grout joint

set up until it is slightly dry, then strike the joint with a jointer

or other similar implement. Make sure it isn't too wet or too

dry. If the mortar wets or stains a brush it is too wet. Brush

of the stone, approximately 1/2 inch thick. When applying

bit in a circular motion. Make sure your mortar is not too

APPLYING THE METAL LATH

Apply a moisture barrier of housewrap and 30 pound felt. Overlap horizontal joints 5 inches and vertical joints 8 inches. All corners must be wrapped a minimum of 16 inches. Then apply 2.5 pound metal lath or equivalent. Metal lath must be overlapped in the same manner as the felt. Fasten with wide crown staples at least 1 inch in length. Make sure all chimneys and windows are properly flashed.

APPLYING THE SCRATCH COAT

Apply a scratch coat using Type M or Type N mortar, approximately ¼ inch to ½ inch thick. Make sure the mortar is not too wet or too dry.



SCAN FOR THE MVMA INSTALLATION GUIDE



out the joints with a soft brush.

2. INSTALLATION OVER CONCRETE MASONRY UNITS

Manufacturer's instructions and according to local building codes. wall movement, improper installation, or discoloration due to airborne contaminants.

Prestige Stone Products, IIc is not responsible for the structural wall surface it is applied to. Make sure to follow all of your local building codes. Building codes will vary from state to state, county to county.

which can be obtained from your dealer or by visiting:



- 50 year Limited Warranty from the date of purchase, when installed to
- Warranty does not cover damaged product resulting from building settlement,
 - The Contractor and Architect are responsible for proper installation.
 - · Warranty is subject to all other terms of the written warranty, a copy of

Prestige Stone Products 9290 Winesburg Road Dundee, OH 44624 goprestigestone.com

