

TRADE PLUMBING & HARDWARE

PRODUCT RANGE




Sealants
Accessories
Foam fillers
PVC solvent Cements & primers
PVA Adhesives & Electrical
Paints
Timber Preservatives
Landscaping and Garden

**TRADIES
TRUST**



PLUMBING SEALANTS

SILICONE, FILLERS, ADHESIVES

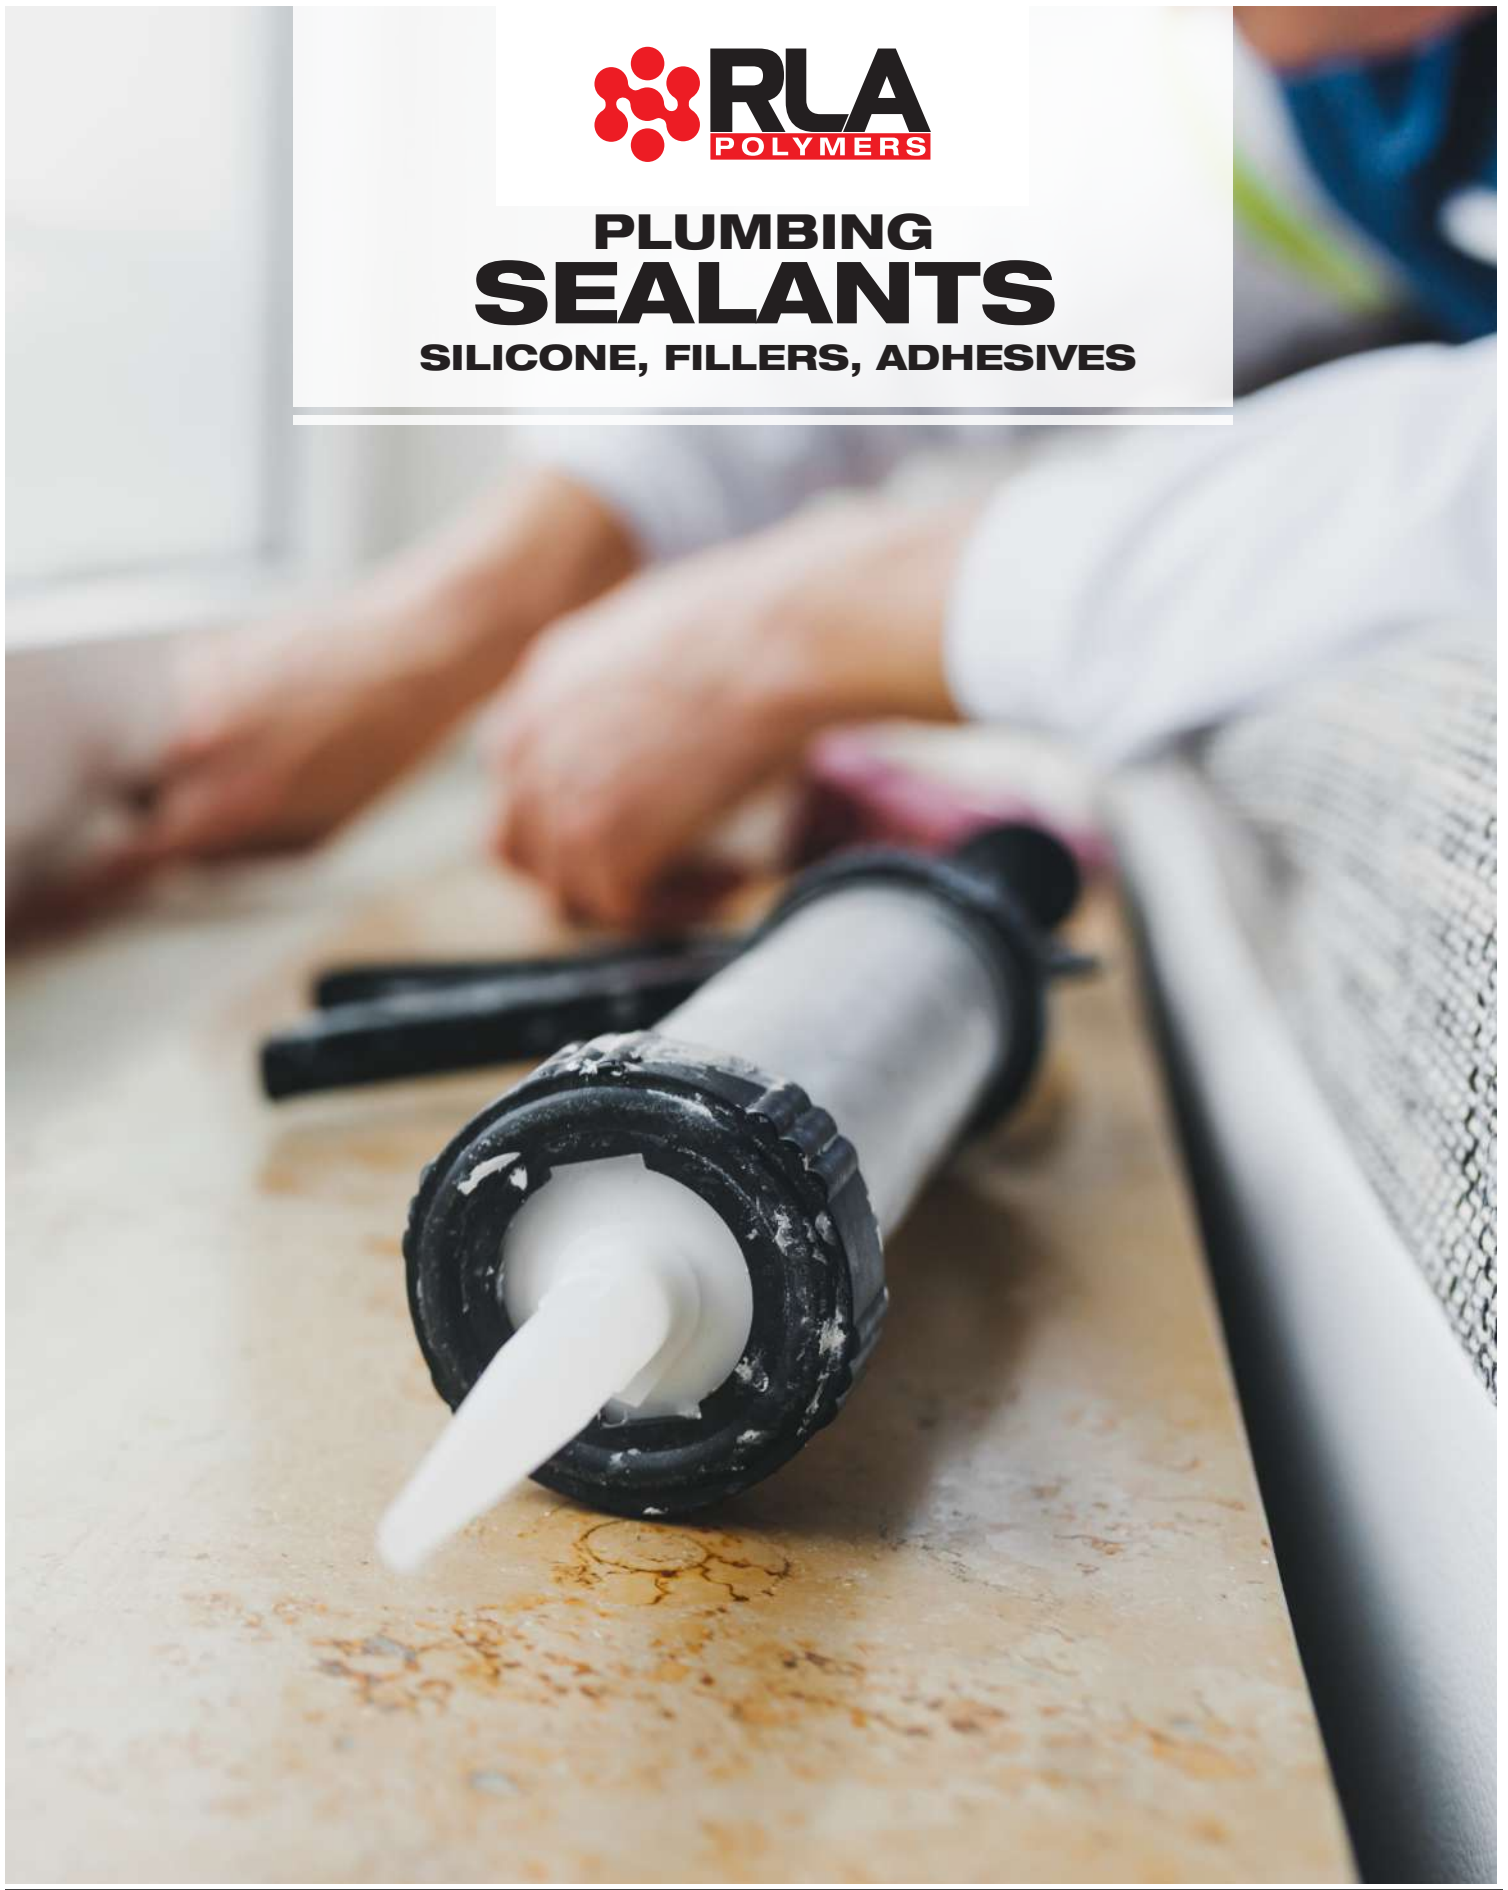

Silicones
SMP Hybrid Technology
Gap Fillers
Adhesives

**TRADIES
TRUST**



Roof & Gutter Silicone Sealant

High performance sealant for roofing applications

A premium quality silicone providing a waterproof seal with excellent adhesion to metal roofing, brick, concrete glass and some plastics.

ADVANTAGES

- AS4020 Approved
- UV Stable
- Mould & fungal resistant

- ± 25% flexible
- Neutral curing

USES

- Metal sheeting
- Guttering
- Internal / External

QUICK REF GUIDE

Colour	Grey / Trans
Area	Internal / External
Size	300ml Cartridge
Code	Trans - 610324
	Grey - 610319



Wet Area Silicone Sealant

High performance sealant for wet area applications

A premium quality silicone providing a waterproof seal with excellent adhesion to most common substrates

ADVANTAGES

- UV Stable
- Mould & fungal resistant
- ± 25% flexible
- Non corrosive
- Neutral curing

USES

- Bathrooms
- Kitchens
- Internal / External

QUICK REF GUIDE

Colour	Trans / White
Area	Internal / External
Size	300ml Cartridge
Code	Trans - 610316
	White - 610318



silikön 100

PROFESSIONAL ROOF & GUTTER

General purpose 100% neutral cure silicone sealant

Neutral curing silicone adhesive/sealant for general purposes in plumbing, construction & industrial automotive applications. Ideal for sealing, glazing & weather-sealing.

Bonds to many substrates including: Glass, wood, timber, concrete, galvanised steel, ceramics, aluminium, some plastics & most painted/powder coated surfaces

ADVANTAGES

- Premium 100% silicone
- UV Stable
- Superior adhesion
- Flexible ± 25%
- As4020 Approved

USES

- Glazing
- Roofing & Guttering
- Weather sealing
- HVAC

- Caravans, trucks & transport
- Portable building applications
- Water tanks

QUICK REF GUIDE

Size	310g Cartridge	
Colour	Almond Ivory	610500
	& Aluminium	610501
Code	Black	610502
	Classic Cream	610505
	Light Grey	610508
	Off White	610510
	Stone Beige	610511
	Trans	610512
	White	610514
	Woodland Grey	610515
	Caufield Green	610516
	Monument	610517

* Colours are indicative only



silikön 700

PROFESSIONAL WET AREA

100% Neutral cure antifungal silicone sealant

High quality 100% neutral oxime curing silicone adhesive/sealant containing antifungicide to prevent mould growth in hot and humid areas. It is ideal for sealing in bathrooms, kitchens, hotel wash basins, and shower screens etc.

Excellent adhesion to glass, aluminium, galvanized steel, concrete, wood, timber, ceramic tiles, baths, vanities & cement sheet etc

ADVANTAGES

- Premium 100% silicone
- Mould inhibited
- Movement capability ± 25%
- Non corrosive
- Superior adhesion
- UV Stable

USES

- Bathrooms
- High traffic wash areas
- Shower screens
- Kitchens
- Wash basins

QUICK REF GUIDE

Size	310g Cartridge	
	600ml Sausage	
Colour	Almond Ivory	610600
	& Bluestone	610602
Code	Charcoal	610603
	Light Grey	610605
	Mid Grey	610606
	Off White	610607
	Pewter	610608
	Stone Beige	610609
	Tile Grey	610610
	Trans	610611
	Travertine	610612
	Black	610613
	White	610614
	Taupe	610615

* Colours are indicative only



UltraGrip

Construction adhesive

Ultragrip Construction Adhesive is a quality synthetic rubber adhesive for the fixing of flooring sheets and wall panelling. Ultragrip tolerates moisture in timber components. Bonds to most commonly used building materials. Suitable for polystyrene.

ADVANTAGES

- Very easy to use
- High strength

USES

- Suitable for polystyrene.
- Bonds to most building material

Construction Adhesive

QUICK REF GUIDE

Colour	Brownish
Area	Internal/External
Size- Code	300mL - 900083 850mL - 900033



Gap Filler

Acrylic gap filler

Gap Filler is a general purpose acrylic mastic painters caulk. Gap Filler is a fast drying, flexible and easily coated filler and is ideal for low movement joints and gaps prior to painting.

ADVANTAGES

- Paintable
- Sandable

USES

- Caulking
- Filling gaps

Acrylic Gap Filler

QUICK REF GUIDE

Colour	White
Area	Internal / External
Size	300ml Cartridge
Code	600395



MAX SMP

Crystal Clear

Crystal clear flexible adhesive/sealant.

ADVANTAGES

- Crystal clear
- Odourless
- Permanently elastic
- Paintable
- No isocyanates
- Can be applied to damp surfaces

USES

- Frame to concrete
- Interior glass
- Glass shower screens
- Interior applications
- High movement areas

MAX GRAB SMP

Instant grab, flexible adhesive/sealant

ADVANTAGES

- No shrinkage
- Solvent, isocyanate free
- Impact resistant
- Odourless
- No isocyanates

USES

- Heavy substrate bonding
- Alternative to clamping
- Damp substrates
- Floor covering adhesion
- Repelling lime/mould





FlexPro PU

Polyurethane sealant

Flex-Pro Polyurethane Sealant is a one component high performance, Low modulus construction joint sealant. A moisture curing sealant with high mechanical strength & excellent resistance to weathering.

ADVANTAGES

- Class A
- Paintable
- Low VOC
- ± 25% Flexible

USES

- Construction joints
- Tilt panels

Polyurethane Sealants

QUICK REF GUIDE

Colour **Grey**
Area **Internal / External**
Size - Code **600ml - 620542**



FlexPro 50FC

Fast curing polyurethane sealant/adhesive

FlexPro 50FC is a one part fast cure polyurethane elastomeric sealant that cures via humidity in the air to form a flexible joint for weatherproofing. It has very good adhesion properties to most common building substrates.

ADVANTAGES

- Class A
- ± 25% Flexible
- Paintable
- High adhesive strength
- Low VOC

USES

- Construction joints
- Sealing perimeter joints
- Adhesive for bonding metal to concrete

QUICK REF GUIDE

Colour **Grey / Black / White**
Area **Internal / External**
Size - Code **Grey 600ml - A1255**
White 600ml - A1256



FlexPro MS

Flexible multipurpose hybrid polymer sealant

FlexPro MS is a one-component sealant based on silane modified polymer, which is moisture cured sealant. It performs good adhesion to most substrates; It is suitable for most of common construction materials, especially to concrete, aluminum, mason, glass, etc. and it is compatible with most paint systems.

ADVANTAGES

- Paintable
- High strength / Flexible
- Low VOC
- UV stable

USES

- Perimeter sealing around window and door frames
- Concrete expansion joints
- Sealing/bonding in the building & construction industry

SMP Adhesives & Sealants

QUICK REF GUIDE

Colour **Grey**
Area **Internal/External**
Size - Code **600ml - 620620**



FlexPro MS-HD

High performance hybrid polymer sealant/adhesive

FlexPro MS-HD is an industrial grade sealant which is based on MS polymer high performance, one part moisturecured, high strength and high modulus. Also, it has high green strength, ideally suitable for industrial application where needs to be fast bonding, higher movement or vibration- absorbed.

ADVANTAGES

- Paintable
- High Strength
- Highly flexible
- Low VOC
- UV stable
- High modulus

USES

- Elastic bonding in vibrating constructions
- Concrete expansion joints
- Sealing/bonding in the building & construction industry

- Body panel adhesive for transport industry
ie: caravan, truck & trailers

QUICK REF GUIDE

Colour **Grey / Black / White**
Area **Internal/External**
Size - Code **Black 600ml - 620627**
White 600ml - 620625



FirePro FR

Fire rated acrylic sealant

FirePro Fire Rated Intumescent Sealant is a water-based acrylic sealant suitable for use in internal and external expansion joints and for penetrations requiring a fire-resistant seal. FirePro expands when exposed to fire to form an inorganic plug in joints and voids, assisting in the prevention of fire transmission across partitions in a building.

ADVANTAGES

- No priming
- 4 hours fire rated
- Flexible

USES

- Concrete, plasterboard, blockwork, brick walls
- Building services' penetrations pipes, cable trays, conduit and ducts

Fire Rated Sealants

QUICK REF GUIDE

Colour **Grey**
Area **Internal / External**
Size- Code **Grey 600mL - R6841-600ML**



PLUMBING ACCESSORIES



Wipes
Caulking guns
Wax wraps

**TRADIES
TRUST**

Heavy Duty Caulking Gun

Premium grade caulking gun



Steel skeleton frame. For easy application of sealant or adhesives around corners without having to stop or reposition the nozzle. Handle combines plunger and release clip.

ADVANTAGES

- Steel skeleton frame
- Handle with plunger & release clip
- For application of sealants & adhesives

USES

- Silicones
- Construction adhesives

QUICK REF GUIDE

Colour **Black w/ Orange trim**

Size - Code **300mL Cartridge A1380**

Sausage Gun

High performance barrel gun



Premium quality caulking gun for use with all 600mL sausages

USES

- Sealants
- Polyurethane

SIZE | CODE

Size - Code **600mL - 770501**

Clean Up Wipes

Handy Wipes

Compostable & Biodegradable Fabric Wipes



Handy Wipes are waterless hand towels for removing tough grime and dirt. These towels have been especially formulated to quickly and effectively remove sealant, tar, dirt, grease, oil, adhesive, paint and ink from tools and equipment.

ADVANTAGES

- Convenient, easy tear off towels
- Won't scratch or mark
- Gentle on hands and skin
- Tough on dirt
- Pre-moistened, disposable, multi-purpose
- Convenient packaging allows for easy dispensing

USES

- At work – clean tools and equipment
- At home – kitchen, bathroom, BBQ, boat and countless other uses

QUICK REF GUIDE

Colour **Orange**

Size **100 Wipes**

Code **999614**


VAPER

The Multi-Use Spray For Tradies

Trade specific to an all out BODYWASH!!!



**CAULKING
CLEAN UP**



**SEAL & SEAM
TESTING**



WASHING



CLEANING

**LEARN MORE
SCAN ME**



**THE CAULKER'S
NEW BEST FRIEND**

AVAILABLE THROUGH RLA POLYMERS NOW



PLUMBING

PVC SOLVENT CEMENTS & PRIMERS



Solvent Cements
Priming Fluids

**TRADIES
TRUST**



PVC Priming Fluid

For use with PVC-U pipes and fittings

PVC Pipe Priming Fluid is a solvent based product which is specially formulated to clean and prime PVC-U pipes and fittings so they are free of dirt and grease. It is fast drying and leaves a pinkish stain to indicate where the PVC pipe has been correctly primed.

USES

- Priming PVC pipes

ADVANTAGES

- AS/NZS 3879 Approved
- AS/NZS 4020 Approved
- Australian Made

RED & CLEAR - Priming fluid

COLOUR | CODE

- Red 125mL - A5621
- Red 250mL - A5623
- Red 500mL - A5625
- Red 1 L - A5627
- Red 4 L - A5629
- Red 20 L - A5631
- Clear 250mL - A5633
- Clear 500mL - A5635
- Clear 4 L - A5637



Type N PVC Pipe Cement

For use with non pressure pipes.

Type N Solvent Cement is designed as a high bond strength PVC pipe cement in all non pressure situations for either pipe work or sheet form PVC substrates.

Also available in: **Large Diameter** | **Gel** | **Slow Set**

USES

- Strong adhesive

ADVANTAGES

- AS/NZS 3879 Approved
- AS/NZS 4020 Approved
- Contact with drinking water
- Australian Made

BLUE & CLEAR - Non Pressure Joints

COLOUR | CODE

- Blue 125mL - A5581
- Blue 250mL - A5583
- Blue 500mL - A5585
- Blue 1 L - A5587
- Blue 4 L - A5589
- Blue 20 L - A5591
- Slow Set Blue 500mL - A5584
- Low Vapour Clear 250mL - A5639
- Clear 250mL - A5593
- Clear 500mL - A5595
- Clear 1 L - A5596
- Clear 4 L - A5597
- Clear 20 L - A6134



Type P PVC Pipe Cement

For use with pressure pipes.

Type P Solvent Cement is designed as a high bond strength PVC pipe cement in all pressure situations for either pipe work or sheet form PVC substrates.

USES

- Strong adhesive

ADVANTAGES

- AS/NZS 3879 Approved
- AS/NZS 4020 Approved
- Contact with drinking water
- Australian Made

GREEN & CLEAR - Pressure Joints

COLOUR | CODE

- Green 125mL - A5599
- Green 250mL - A5605
- Green 500mL - A5607
- Green 4 L - A5611
- Green 20L - A5613
- Clear 500mL - A5615
- Clear 4L - A5617
- Clear 20L - A5619



Type G PVC Pipe Cement

For use with pressure & non pressure pipes.

Type G Solvent Cement is designed bonding PVC-U large diameter pipes in pressure & non-pressure applications

USES

- Strong adhesive

ADVANTAGES

- AS/NZS 3879 Approved
- AS/NZS 4020 Approved
- Contact with drinking water
- Australian Made

Large Diameter Pressure & Non Pressure Joints

COLOUR | CODE

- Clear 1 L - A6113
- Clear 4 L - A6114



Plumbing Dauber Applicator Brushes

Dauber Applicator Brushes

COLOUR | CODE

- Red 500mL - A6156 (10 Pack)
- Blue 500mL - A6155 (10 Pack)



MDF ADHESIVES & ELECTRICAL



MDF Adhesive
Cable Lube
Epoxy

**TRADIES
TRUST**



MDF Adhesive

High strength adhesive for medium density board

Specially formulated to provide good adhesion to medium density fibreboard

USES

- Joinery
- Cabinets
- Internal

ADVANTAGES

- Fast setting
- High bond strength
- Non hazardous

Fibreboard

QUICK REF GUIDE

Colour **Pale Pink**

Area **Internal**

Size & Code **250mL - 999550**

500mL - 999580



CableLube

Code C cable pulling lubricant

Cable Lube is used to assist in the laying and pulling of cable into conduits under floors, under ground and more.

USES

- Suitable on all electrical conduit.
- Vertical and horizontal.
- Internal / External

ADVANTAGES

- Easy applicator bottle
- Water wash up
- Non-hazardous

Electrical

QUICK REF GUIDE

Colour **Light blue**

Area **Internal / External**

Size & Code **1L - A4401**

20L - A4403



MultiPurpose Epoxy

2 Part High Strength Adhesive

Multipurpose Epoxy Adhesive is a 2-part, non sag, high strength adhesive. It is intended for bonding of a variety of common building materials to vertical and horizontal surfaces.

ADVANTAGES

- Permanent bond 5 – 6 hours
- Non staining on all stone types
- Non sag up to 30 mm build
- Mix ratio 1:1
- Solvent free
- Permanent bond – no performance decrease over time
- High performance properties
- High tensile and compressive strength
- Excellent chemical resistance

USES

- Masonry, precast concrete, stone panels marble, granite, slate, ceramic tiles on walls or overhead in interior or exterior applications,
- Insitu formed concrete, Precast concrete, Grouting/fixing anchor bolts,
- Bonding to metals, Concrete structures, Fabrication of head stones and other decorative stone items,
- Statues and fountains, Pipe and crack repair.

Epoxy

QUICK REF GUIDE

Colour **Light grey**

Area **Internal / External**

Size- Code **1L Kit - 14509**

4L Kit - 14504

20L Kit - 14505



TIMBER PRESERVATIVES & HARDWARE PAINTS



Survey Paints
Timber Treatments
& Preservatives

**TRADIES
TRUST**

Survey Paint Spray Marker

Premium Marking Paint

Survey Paint Spray Marker. Quick drying, long lasting, highly durable spray marker used for writing and spot marking in a variety of applications. Colours available include:



TIMBER

BITUMEN

CONCRETE

GRASS / SOIL

STEEL

ADVANTAGES

- U.V Resistant
- Fast Drying
- Excellent Colour
- Long lasting

USES

- Concrete
- Bitumen
- Grass
- Gravel
- Dirt
- Timber

QUICK REF GUIDE

Area **Internal/External**
Qty **12 x Aerosol Cans**
Size **350gm**

Colour/Code Description

- ABA012 Survey Brilliant Red 350g
- ABA013 Survey Brilliant Yellow 350g
- ABA032 Survey Brilliant Red 350g
- ABA033 Survey Brilliant Blue 350g
- ABA207 Survey Brilliant White 350g
- ABA040 Survey Fluro Yellow 350g
- ABA043 Survey Fluro Pink 350g
- ABA200 Survey Fluro Green 350g
- ABA203 Survey Fluro Orange 350g

* Colours are indicative only



OzBond

Metal touch up paint






NEW

QUICK DRY

EXCELLENT COVERAGE

RUST GUARD

ACRYLIC FINISH

	Code	Description	Colour	
	OZB001	Colorbond Paint	SurfMist	300g
	OZB002	Colorbond Paint	Classic Cream	300g
	OZB010	Colorbond Paint	Cottage Green	300g
	OZB012	Colorbond Paint	Manor Red	300g
	OZB014	Colorbond Paint	Shale Grey	300g
	OZB018	Colorbond Paint	Woodland	300g
	OZB020	Colorbond Paint	Night Sky	300g
	OZB036	Colorbond Paint	Monument	300g

* Colours are indicative only
* Other colours available upon request



EcoSeal

Treatment for cut timber ends

Woodcare EcoSeal is an aerosol spray for the reinstatement of the treatment envelope of re-worked treated pine on timber up to H5. Above ground only

Above ground only.

ADVANTAGES

- Protects cut timber
- Allows you to keep your warranty on timber
- Easy to use
- Fast drying

USES

- H3 timber
- H4 timber
- Cuts on treated timber

QUICK REF GUIDE

Colour	Green
Area	Above ground
Size- Code	300gm - 999705



Don't take short cuts...Treat your end cuts!
Ensure your timber remains treated & protected

All treated timber that is cut, notched or drilled needs to be retreated to ensure the longevity of the timber and ensure the warranty of your timber.



Enseal

Clear treatment for cut timber ends

Woodcare Enseal Clear is an aerosol spray for the reinstatement of the treatment envelope of re-worked treated pine on timber up to H3. Above ground only

Above ground only.

ADVANTAGES

- Protects cut timber
- Allows you to keep your warranty on timber
- Easy to use
- Fast drying

USES

- H2 timber
- H3 timber
- Cuts on treated timber

QUICK REF GUIDE

Colour	Clear
Area	Above ground
Size- Code	300gm - 999704



Endcheck

Wax emulsion timber sealer

Woodcare Endcheck is a wax based emulsion for the coating of log ends and sawn timber to reduce the moisture loss and resultant splitting.

ADVANTAGES

- Prevents splitting
- Restricts moisture loss
- Dries to wax coating
- Suitable spray apparatus

USES

- Logs
- Sawn timber

QUICK REF GUIDE

Size	200LT - 174055
------	-----------------------



Landscaping and **GARDEN**



Binders

**TRADIES
TRUST**

GardenLock

Water based binding agent
for stones and wood chips



For binding both landscaping and decorative stones in garden beds, pot plants & tree surrounds. Whilst still allowing for water penetration & keeping moisture in the soil. GardenLock binder assists in reducing ongoing maintenance & enhances the appearance of tones. It is touch dry after 1 hour & fully cures in 48 hours.

QUICK REF GUIDE


Colour	Dries clear
Size - Code	1L - A6031
	4L - A6034
	20L - A6035

ADVANTAGES

- Keeps stones in position
- Allows water flow
- 1 Hour touch dry
- UV Stable

USES

- Tree surroundings
- Garden beads
- Pot plants
- Art & craft application

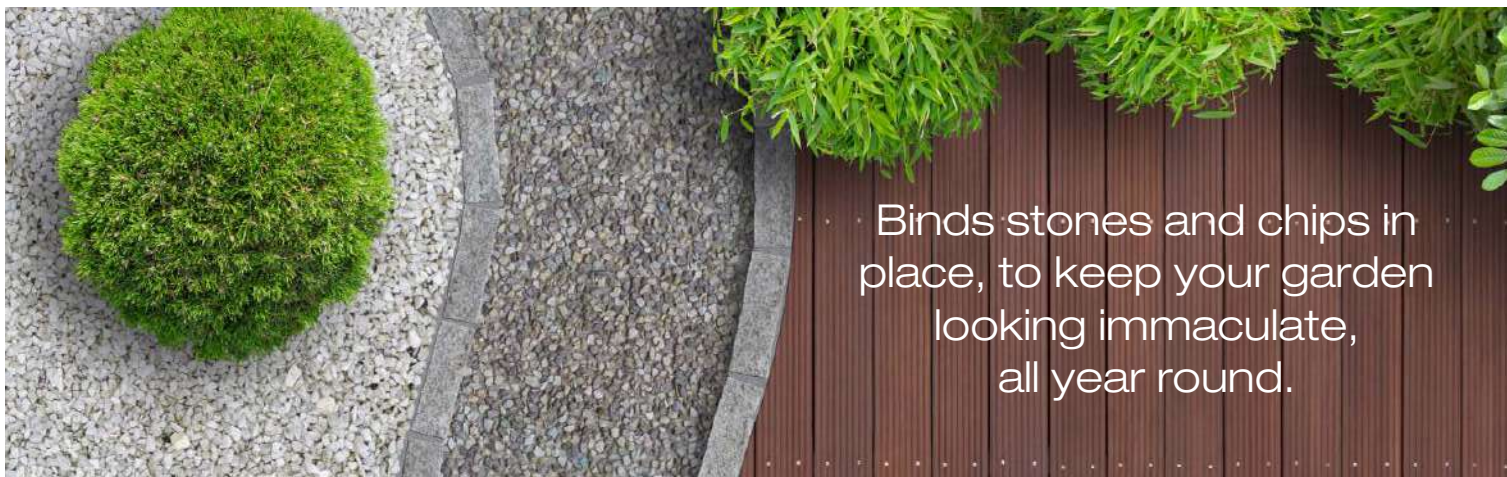

TILING



Tile adhesives
Grouts
Admixtures
Silicones

**TRADIES
TRUST**

ADHESION TYPE:

C

Cementitious adhesive

D

Dispersion adhesive

R

Reaction adhesive

ADHESION CAPACITY:

1

Normal adhesives
Standard strength tile adhesive

2

Improved adhesives
Stronger tile adhesive

OPTIONAL CLASSES:

F

Faster setting/drying adhesive
Quicker setting of the adhesive allowing for earlier grouting

T

Reduced slip adhesives
No slipping of wall tiles

E

Adhesives with extended open time
Once spread, the adhesive can be left without a tile being fixed for a longer time

S1

Deformable adhesives
For cementitious adhesives only

S2

Highly deformable adhesives
(for cementitious adhesives only)



TileBond Extra

Cement Adhesive

Premium white cement based tile adhesive

TileBond Extra is a reliable white cement. It is excellent for rigid fixing requirements such as pavers and landscaping.

ADVANTAGES

- White cement based
- Low VOC
- 10 Year Guarantee

SUBSTRATES

- Concrete floors and walls
- Rendered brickwork, block work

QUICK REF GUIDE

Colour	White
Class	C1E
Area	Internal External
Uses	Wall Floor
Coverage	4-5m²
Dry Time	24 Hrs
Size- Code	20KG -RL7110-20



MoreFlex

Flexible, rubber modified tile adhesive

Moreflex is a rubber modified, flexible, grey cement based tile adhesive. It can be used internally or externally on wall and floor surfaces

ADVANTAGES

- Flexible
- White cement based
- Non lipping
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete
- Plasterboard
- Rendered brickwork, block work
- Fibre cement

Rubber Modified Adhesive

QUICK REF GUIDE

Colour	Grey
Class	C1ETS1
Area	Internal external
Uses	Wall Floor
Coverage	8-10m²
Dry Time	24 Hrs
Size- Code	20KG Grey - 510013



TileFlex

Premium grade rubber modified adhesive

TileFlex is a rubber modified flexible white tile adhesive, it is non slump and ideal for large format tiles. It can be used for internal and external wall and floor applications.

ADVANTAGES

- Highly flexible
- White cement based
- Non slump
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC Sheet
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

Rubber Modified Adhesive

QUICK REF GUIDE

Colour	White
Class	C2TES1
Area	Internal External
Uses	Wall floor
Coverage	7-8M²
Dry Time	24 Hrs
Size- Code	20KG - RL7145-20



AddFlextra

White polymer modified tile adhesive

AddFlextra is a rubber modified flexible white cement based tile adhesive, with excellent high coverage ability. AddFlextra can be used to tile over existing tiles as long as the surface is coated with RLA Universal Primer.

ADVANTAGES

- Strong Bond
- Low VOC
- Non slump
- Excellent coverage
- Ideal for large format tiles
- Fixing low porosity tiles

SUBSTRATES

- Concrete
- Plasterboard
- Rendered brickwork, block work
- F/C Sheet

QUICK REF GUIDE

Colour	White
Class	C2TES1
Area	Internal External
Uses	Wall Floor
Coverage	10-12m²
Dry Time	24 Hrs
Size- Code	20KG -RL7550-20



NEW



Trade Mastik

Polymer modified adhesive

RLA Trade Mastik is a smooth, white, polymer modified cement based tile adhesive. Suitable for internal and external wall and floor tiling, Trade Mastik provides an economical adhesive option displaying good adhesion, flexible and non-slump properties

ADVANTAGES

- Flexible
- Non slump
- Good coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

Polymer Modified Adhesives

QUICK REF GUIDE

Colour	White
Class	C1TES1
Area	Internal External
Uses	Wall Floor
Coverage	7m²
Dry Time	24 Hrs
Size- Code	20KG - 510020



Mastik

Premium, flexible polymer modified adhesive

RLA Mastik is a green tag certified, silica free, flexible polymer modified adhesive with great mastic properties for bonding most types of ceramic and porcelain tiles (with the exception of moisture sensitive stone and marbles). Ideal for large format tiles.

ADVANTAGES

- Flexible
- White cement based
- Non slump
- Excellent coverage
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

Colour	White / Grey
Class	C2TES1
Area	Internal External
Uses	Wall Floor
Coverage	7m²
Dry Time	24 Hrs
Size- Code	20KG White - RL7152-20 20KG Grey - RL7122-20



NEW



UniLite S1

Lightweight flexible tile adhesive

UniLite S1 is a lightweight floor wall tile adhesive comprising respirable silica free fillers with advanced polymer technology. The unique combination enables high yields and extended coverage over standard sand/cement blends, while improving workability, material consistency and general ease of use.

ADVANTAGES

- Lightweight technology
- Non slip / Non Slump
- Flexible
- Extended coverage
- Extended open time
- High bond strength

SUBSTRATES

- Concrete / FC Sheetting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

Colour	White or Grey
Class	C2TES1
Area	Internal External
Uses	Wall Floor
Coverage	5-6m²
Dry Time	24 Hrs
Size- Code	12.5KG - White - 510005 12.5KG - Grey - 510008

Lightweight Adhesives

NEW



UniLite S2

Lightweight flexible tile adhesive

UniLite S2 is a high bond strength, high deformable, lightweight, floor wall tile adhesive comprising respirable silica free fillers with advanced polymer technology. UniLite S2 has high yields & extended coverage over standard sand/cement blends, while improving workability, material consistency and general ease of use with added flexibility.

ADVANTAGES

- Lightweight technology
- Highly Flexible
- Non slip / Non Slump
- Extended coverage
- Extended open time
- High bond strength

SUBSTRATES

- Concrete / FC Sheetting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

Colour	White
Class	C2TES2
Area	Internal External
Uses	Wall Floor
Coverage	5-6m²
Dry Time	24 Hrs
Size- Code	12.5KG - 510010





UniGrip

Premium Quality Polymer Modified

Premium grade polymer modified, highly flexible adhesive

Unigrip is non slip/non slump and ideal for large format tiles and can be used for fixing Porcelain and Vitrified tiles. Unigrip can be used to fix tiles over existing tiles and can be used to fix tiles over most waterproofing membranes. Unigrip can be used for fixing tiles in fully immersed situations like swimming pools and spas and can be used over some acoustic mats.

ADVANTAGES

- Highly Flexible
- Use in immersed situations
- Non slump / Non Slump
- Use over green screeds
- 10 Year Guarantee

SUBSTRATES

- Concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

QUICK REF GUIDE

Colour	White
Class	C2S2ET
Area	Internal External
Uses	Wall Floor
Coverage	6-7m²
Dry Time	24 Hrs
Size- Code	15KG - RL7153-15



FastSet

Rapid setting tile adhesive

RLA Fast Set is a high quality and cost effective rapid setting, polymer modified, grey cement based tile adhesive. Ideal for use in situations where the adhesive must dry quickly or when grouting must be completed shortly after fixing of tiles.

ADVANTAGES

- Rapid setting:
3 Hours to Grout,
6 Hours Foot Traffic
- Polymer modified, Non-slump.
- Over Green Screed.

SUBSTRATES

- Concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work
- RLA approved membranes

Fast Setting Adhesives

QUICK REF GUIDE

Colour	Grey
Class	C2S1FTE
Area	Internal External
Uses	Wall Floor
Coverage	5-6m²
Dry Time	6 Hrs
Size- Code	20KG - RL7132-20



StoneSet

Moisture sensitive stone adhesive

RLA Stone Set is a premium grade rapid setting, polymer modified, White cement based tile adhesive. Ideal for use in situations where the adhesive must dry quickly or when grouting must be completed shortly after fixing of tiles.

ADVANTAGES

- Rapid setting:
2 Hours to grout,
4 Hours foot traffic
- Polymer modified, non-slump.
- Can be used over green screed.

SUBSTRATES

- Class A Moisture sensitive tiles.
- Plasterboard
- Rendered brickwork, block work
- Concrete / FC Sheeting
- RLA approved membranes

Stone Adhesives

QUICK REF GUIDE

Colour	White
Class	C2S1FTE
Area	Internal External
Uses	Wall Floor
Coverage	5-6m²
Dry Time	4 Hrs
Size- Code	20KG - RL7131-20



PolyMastic

Pre-mixed white acrylic tile adhesive

Polymastic is an internal wall adhesive with superior non slump properties, specially designed for larger wall tiles. Polymastic is a white acrylic based, flexible, premixed tile adhesive designed for bonding all types of porous ceramic, and mosaic tiles.

ADVANTAGES

- Easy to apply
- Non slip
- Low VOC
- 10 Year Guarantee

SUBSTRATES

- Fibre cement sheeting
- Plasterboard
- Rendered brickwork, block work

Pre-mixed Adhesives

QUICK REF GUIDE

Colour	White
Class	D1E
Area	Internal
Uses	Wall
Coverage	7-10m²
Dry Time	4 Hrs
Size- Code	4LT - RL7194-4 15LT - RL7194-15



WATER PROOFING

RANGE



Liquid & cementitious membranes.
Moisture barriers, primers & Sealers.
Tapes & bandages.

**TRADIES
TRUST**

WPU

Class III Internal / External Waterproofing membrane

RLA WPU is an elastomeric one part polyurethane/Acrylic fibre reinforced water based membrane developed as a high performance internal / external membrane for most general waterproofing applications. It is suitable to be applied in external applications where a UV stable occasional trafficable membrane is required.

ADVANTAGES

- Tough & Flexible
- Class III Membrane
- CSIRO certified external use
- UV Stable
- Excellent adhesion
- Fast drying

USES:

- Residential/commercial buildings
- Bathrooms, kitchens, laundries, balconies.
- Decks, roofs.
- Internal/External wet areas



External Membrane

QUICK REF GUIDE

Colour	Grey
Class	III
Area	Internal / External
Coverage	Wall: 0.5mm DFT Floor: 0.9mm DFT
Size- Code	4LT - 14443 15LT - 14442

WPM

Class III SBR Waterborne flexible under tile membrane

RLA WPM is a waterborne flexible waterproof membrane designed for use under tiled finishes that is capable of accommodating expected structural movement. RLA WPM is a certified Class III membrane and is compliant to AS4858:2004: "Wet Area Membranes", when applied in accordance to AS3740:2010 "waterproofing Wet Areas in Residential Buildings".

ADVANTAGES

- Permanently flexible
- Class III Membrane
- Quick drying
- Low VOC
- Excellent adhesion
- Fibre reinforced

USES:

- Residential/commercial buildings
- Bathrooms, kitchens, laundries, balconies.
- Shower recesses.
- Internal wet areas



Wet Area - Flexible Membrane

QUICK REF GUIDE

Colour	Grey
Class	III
Area	Internal
Coverage	Wall: 0.5mm DFT Floor: 0.9mm DFT
Size- Code	15LT - 14510



Safe2o

Solvent Free Waterproofing Membrane

RLA Safe2o is a one part, liquid applied, moisture cured non-hazardous SMP waterproofing membrane. Cures to form a tough, durable and elastomeric membrane suitable for under screed and other non exposed and below ground applications. Unique SMP technology enables single coat applications over horizontal surfaces with a dry film thickness of not less than 1,200 microns (for Class III compliance).

ADVANTAGES

- One coat application
- Class III Membrane
- Isocyanate free
- No shrinkage

USES:

- Retaining walls
- Plantar boxes
- Internal wet areas
- Covered balconies & decks



Solvent Free Membrane

QUICK REF GUIDE

Colour	Grey
Class	III
Area	Internal / External
Coverage	Floor: 1.2mm DFT
Size- Code	15KG - RI1003



2Part

UV Stable cementitious 2 part waterproofing membrane

2Part is based on high alumina fast setting cements and is mixed with a high solids water resistant pure acrylic. It combines the fast drying and excellent adhesion characteristics of traditional 2 part membranes with the excellent toughness, elongation and flexibility of modern acrylic membranes.

ADVANTAGES

- Good elongation
- Tough membrane
- Excellent adhesion
- Flexible

USES:

- Under tile on balconies, roofs
- Swimming pools
- Internal/External under tile areas.



UV Stable Membrane

QUICK REF GUIDE

Colour	Off white
Class	II
Area	Internal / External
Coverage	16m² @ 2 coats, with a DFT of 1.2mm
Size- Code	20LT Part A 20Kg Part B RL7190-KIT



1Komponent

One Part, flexible, cementitious, fibre reinforced membrane

Specially formulated cementitious base incorporating graded aggregates and polymers, producing a highly flexible water proof membrane – capable of withstanding significant flexural strain. It is suitable for both positive and negative pressure – up to 25 metres (2.5 bars).

ADVANTAGES

- Apply by trowel for best results
- Can be applied by brush/roller
- Use on damp surfaces
- Versatile mixing ratio
- Excellent adhesion
- Flexible

USES:

- Under tile internal wet areas
- Under tile in external areas
- Concrete swimming pools
- Areas subject to hydrostatic pressure

QUICK REF GUIDE

Colour	Light Grey
Class	I
Area	Internal / External
Coverage	1.17 kg/m² per mm of thickness
Size- Code	20KG - 999729



PU850

Moisture cured polyurethane waterproofing membrane

RLA PU850 cures to form a, seamless, tough, durable, elastomeric waterproofing membrane. RLA Pu850 has excellent adhesion to most suitably primed building substrates and is suitable for above and below ground applications.

ADVANTAGES

- Tar and Bitumen free
- Permanently flexible
- Good Chemical resistance
- Excellent adhesion

USES:

- Retaining Walls
- Planter Boxes
- Internal wet areas, balconies & decks
- Rooftops & Exposed applications

QUICK REF GUIDE

Colour	Grey
Class	III
Area	Internal / External
Coverage	1.5L/m² @ 1.2mm DFT
Size- Code	15LT - 750599



ATC Aliphatic Top Coat

One part, transparent polyurethane waterproof coating

One part, elastomeric aliphatic coating for UV protection for exposed areas and cures to form an elastic & durable film. RLA's ATC has high mechanical, chemical, tensile and tear resistance.

ADVANTAGES

- Can be applied with a roller, brush or airless spray.
- Tough durable finish.
- Strong adhesion.
- Chemical resistance.
- Resistance to ponding water.

QUICK REF GUIDE

Colour	Transparent
Area	External
Coverage	200g - 300g/m²
Size- Code	15 Litres

Primers & Sealers



Moisture Seal

Epoxy water vapour barrier

Moisture Seal is a high performance 2 part epoxy waterproofing system designed as a water and vapour proof coating under water proofing systems, coatings, tiles and Timber flooring. It is designed for floor and wall applications where durability, water, and chemical resistance are required.

ADVANTAGES

- Low VOC
- Withstands a head of Water Pressure up to 25 metres or 250Kpa
- Complies with AS 4020:2005 "Products in contact with drinking water"
- Complies with ASTM E96 Water vapor transmission
- Water based and user friendly

SUITABLE FOR USE:

- Primer for damp surfaces, scyon sheeting, membranes & more
- Areas where hydrostatic pressure is an issue.
- Sealing concrete slabs before vinyl and timber overlays
- Dust sealing for interior concrete floors
- Retaining Walls, Planter boxes, Concrete Tanks, Lift Wells
- Basements, Reservoirs, Aquaducts, Underground Carparks
- As a Basecoat coating in areas requiring seamless epoxy flooring


QUICK REF GUIDE

Mixing ratio	1:1 (component A:B)
Full cure	5-7 days@25°C & 50%RH
Dry film thickness	100 microns (approx.)
Wet film thickness	200 microns
Coverage	4-5m²/Litre
Size- Code	8LT Kit - 15636 20LT Kit - 15637



GROUT

RANGE

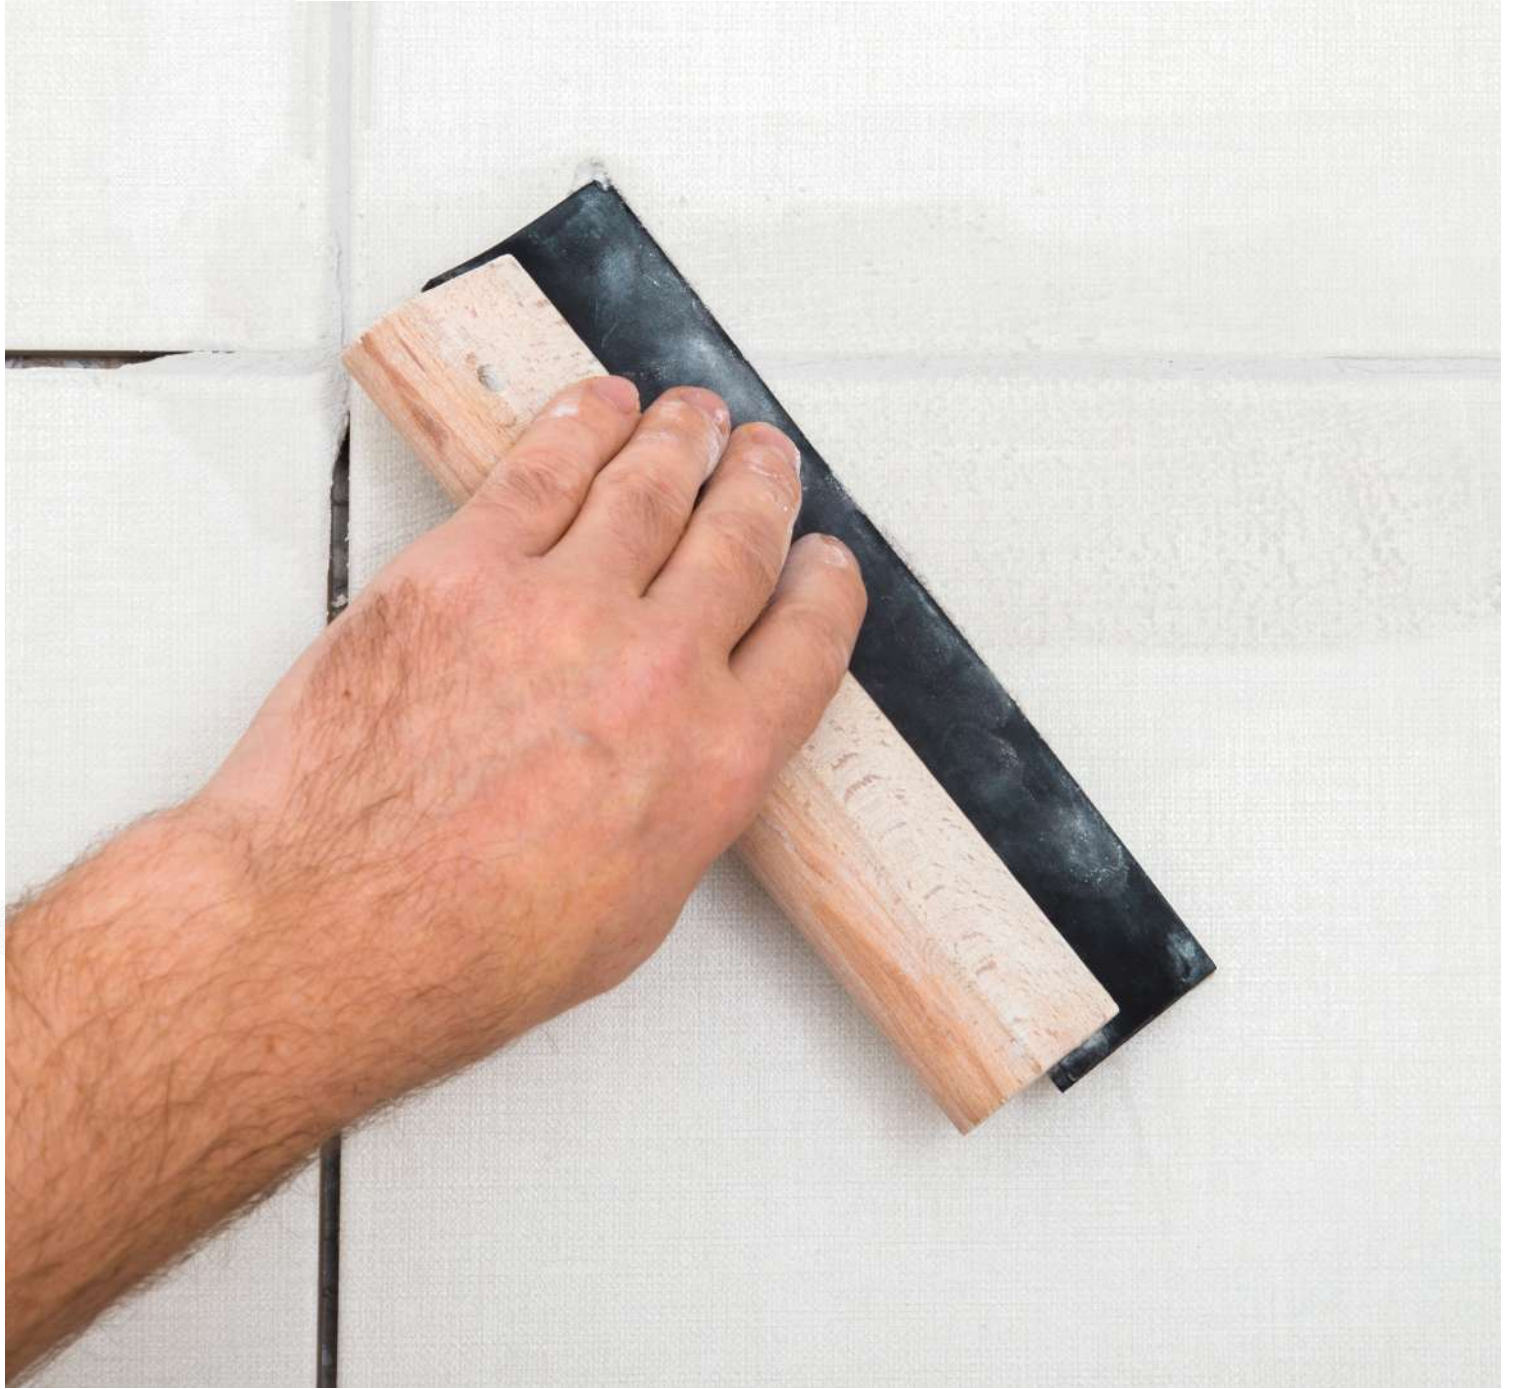

Coloured grouts.
Epoxy grouts.
Sanded grouts

**TRADIES
TRUST**

Luminous GROUT

Luminous EF

Fast setting and vibrant coloured grout

RLA Luminous grout is a fast setting, efflorescence free, smooth and flexible cementbased grout that is designed to fill tile joints ranging from 1mm to 20mm wide, whether it be on walls or floors. It has a special formula that helps maintain its colour integrity over time and is available in a range of designer colours that can cater to various design styles.

ADVANTAGES

- Extremely Low VOC
- Resistant to mould and water
- Polymer fortified
- Strong uniform colour that reduces efflorescence

SUBSTRATES

- Ceramic and mosaic tiles
- Moisture insensitive natural stone and glass tiles
- Porcelain and terrazzo
- Slate and Quarry tiles



QUICK REF GUIDE

Colour	16 Colours
Class	CG2WAF
Area	Internal external
Uses	Wall floor
Coverage	Refer calculator
Dry Time	24 Hours /
	48 Hrs for swimming pools



*Silica (Respirable Crystalline Fraction) levels are below the concentration limit for carcinogens (0.1%) as per schedule 6 of the Model Work Health Safety Regulations 2023.

LUM02-4	WHITE	4KG	
LUM82-4	ALABASTER	4KG	
LUM41-4	MISTY GREY	4KG	
LUM85-4	MUDBERRY	4KG	
LUM21-4	LIGHT BEIGE	4KG	
LUM06-4	MAGELLAN	4KG	
LUM77-4	TRAVERTINE	4KG	
LUM80-4	HAVANA	4KG	

LUM39-4	SALMON	4KG	
LUM30-4	MUSTARD	4KG	
LUM88-4	MACCHIATO	4KG	
LUM14-4	SKY	4KG	
LUM19-4	FOREST	4KG	
LUM11-4	SLATE GREY	4KG	
LUM54-4	CHARCOAL	4KG	
LUM55-4	BLACK	4KG	

Luminous SSG

Smooth, Vibrant Coloured Grout



RLA Luminous Grout SSG is a high performance ceramic tile grout designed for internal and external applications. With enhanced workability, the smooth finish and built-in water and mould resistance improves colour fastness, vibrancy and overall durability for demanding environments. Luminous Grout is available in a range of colours to suit various design preferences.



SIZE & CODE

WHITE	4KG	LUMSSG02-4
	10KG	LUMSSG02-10
ALABASTER	4KG	LUMSSG82-4
	10KG	LUMSSG82-10
MISTY GREY	4KG	LUMSSG41-4
	10KG	LUMSSG41-10
MUD BERRY	4KG	LUMSSG85-4
	10KG	LUMSSG85-10
LIGHT BEIGE	4KG	LUMSSG21-4
	10KG	LUMSSG21-10
MAGELLAN	4KG	LUMSSG06-4
	10KG	LUMSSG06-10
TRAVERTINE	4KG	LUMSSG77-4
	10KG	LUMSSG77-10
HAVANA	4KG	LUMSSG80-4
	10KG	LUMSSG80-10
MACCHIATO	4KG	LUMSSG88-4
	10KG	LUMSSG88-10
SLATE	4KG	LUMSSG11-4
	10KG	LUMSSG11-10
CHARCOAL	4KG	LUMSSG54-4
	10KG	LUMSSG54-10
BLACK	4KG	LUMSSG55-4
	10KG	LUMSSG55-10

WHITE	✿
ALABASTER	✿
MISTY GREY	✿
MUDBERRY	✿
LIGHT BEIGE	✿
MAGELLAN	✿

TRAVERTINE	✿
HAVANA	✿
MACCHIATO	✿
SLATE	✿
CHARCOAL	✿
BLACK	✿





Luminous

SILICONE

WET AREA

IDEAL FOR:



Glazing



Bathroom Areas



Laundry Applications



Toilets



Wash Basins



Kitchen Applications

EXCELLENT ADHESION TO BUILDING MATERIALS:

- Glass shower screens
- Aluminium
- Galvanised steel
- Cement Sheeting
- Concrete
- Brick
- Ceramic
- Wood

SIZE & CODE

WHITE	300mL	610702
ALABASTER	300mL	610782
MISTY GREY	300mL	610741
MUDBERRY	300mL	610785
LIGHT BEIGE	300mL	610721
MAGELLAN	300mL	610706
TRAVERTINE	300mL	610777
HAVANA	300mL	610780
MACCHIATO	300mL	610788
FOREST	300mL	610719
SLATE GREY	300mL	610711
CHARCOAL	300mL	610754
BLACK	300mL	610755

- Mould & mildew resistant
- 5-12 minute skin time
- Non-corrosive
- Total joint movement capability 50%
- Internal & external use

WHITE	TRAVERTINE
ALABASTER	HAVANA
MISTY GREY	MACCHIATO
MUDBERRY	FOREST
LIGHT BEIGE	SLATE
MAGELLAN	CHARCOAL
	BLACK

COLOUR MATCHED TO THE LUMINOUS GROUT RANGE



Epoxy Grout

2 Component, epoxy grout

Two-part anti-acid epoxy mortar. Once mixed together, the two parts form a creamy mixture with excellent smoothness, which is also suitable for vertical no-slip application. Once hardened, the product is ultra high-performing in term of mechanical and chemical resistance. Grouting joints 1-15mm.

ADVANTAGES

- Easy to clean & use
- Flexible
- No Efflorescence or staining

SUBSTRATES

- Ceramic and mosaic tiles
- Surfaces exposed to aggressive chemicals.

QUICK REF GUIDE

Colour	4 colours
Area	Internal external
Uses	Wall floor
Coverage	Refer calculator
Dry Time	24 Hours
Size	5KG kits

ARCTIC
MID GREY

SLATE
CHARCOAL

Size	Colour	Code
5KG	Arctic	620400
5KG	Mid Grey	620401
5KG	Slate Grey	620402
5KG	Charcoal	620403

* Colours are indicative only



The Once Over

Rejuvenating grout cleaner

A powerful solution that rejuvenates and revitalizes grout color, effortlessly removing stains on new installations. Preserving the original look of both new and old grout, ensuring easy, long-lasting maintenance for a refreshed and immaculate finish.

ADVANTAGES

- Mild acidic cleaner
- Easy to use
- Use internally & externally

SUITABILITY

- Suitable for all grout types.


QUICK REF GUIDE

Colour	Clear
Area	Internal external
Uses	All grout type
Size	1 Litre
Code	506210





TILING PRIMERS ADDITIVES

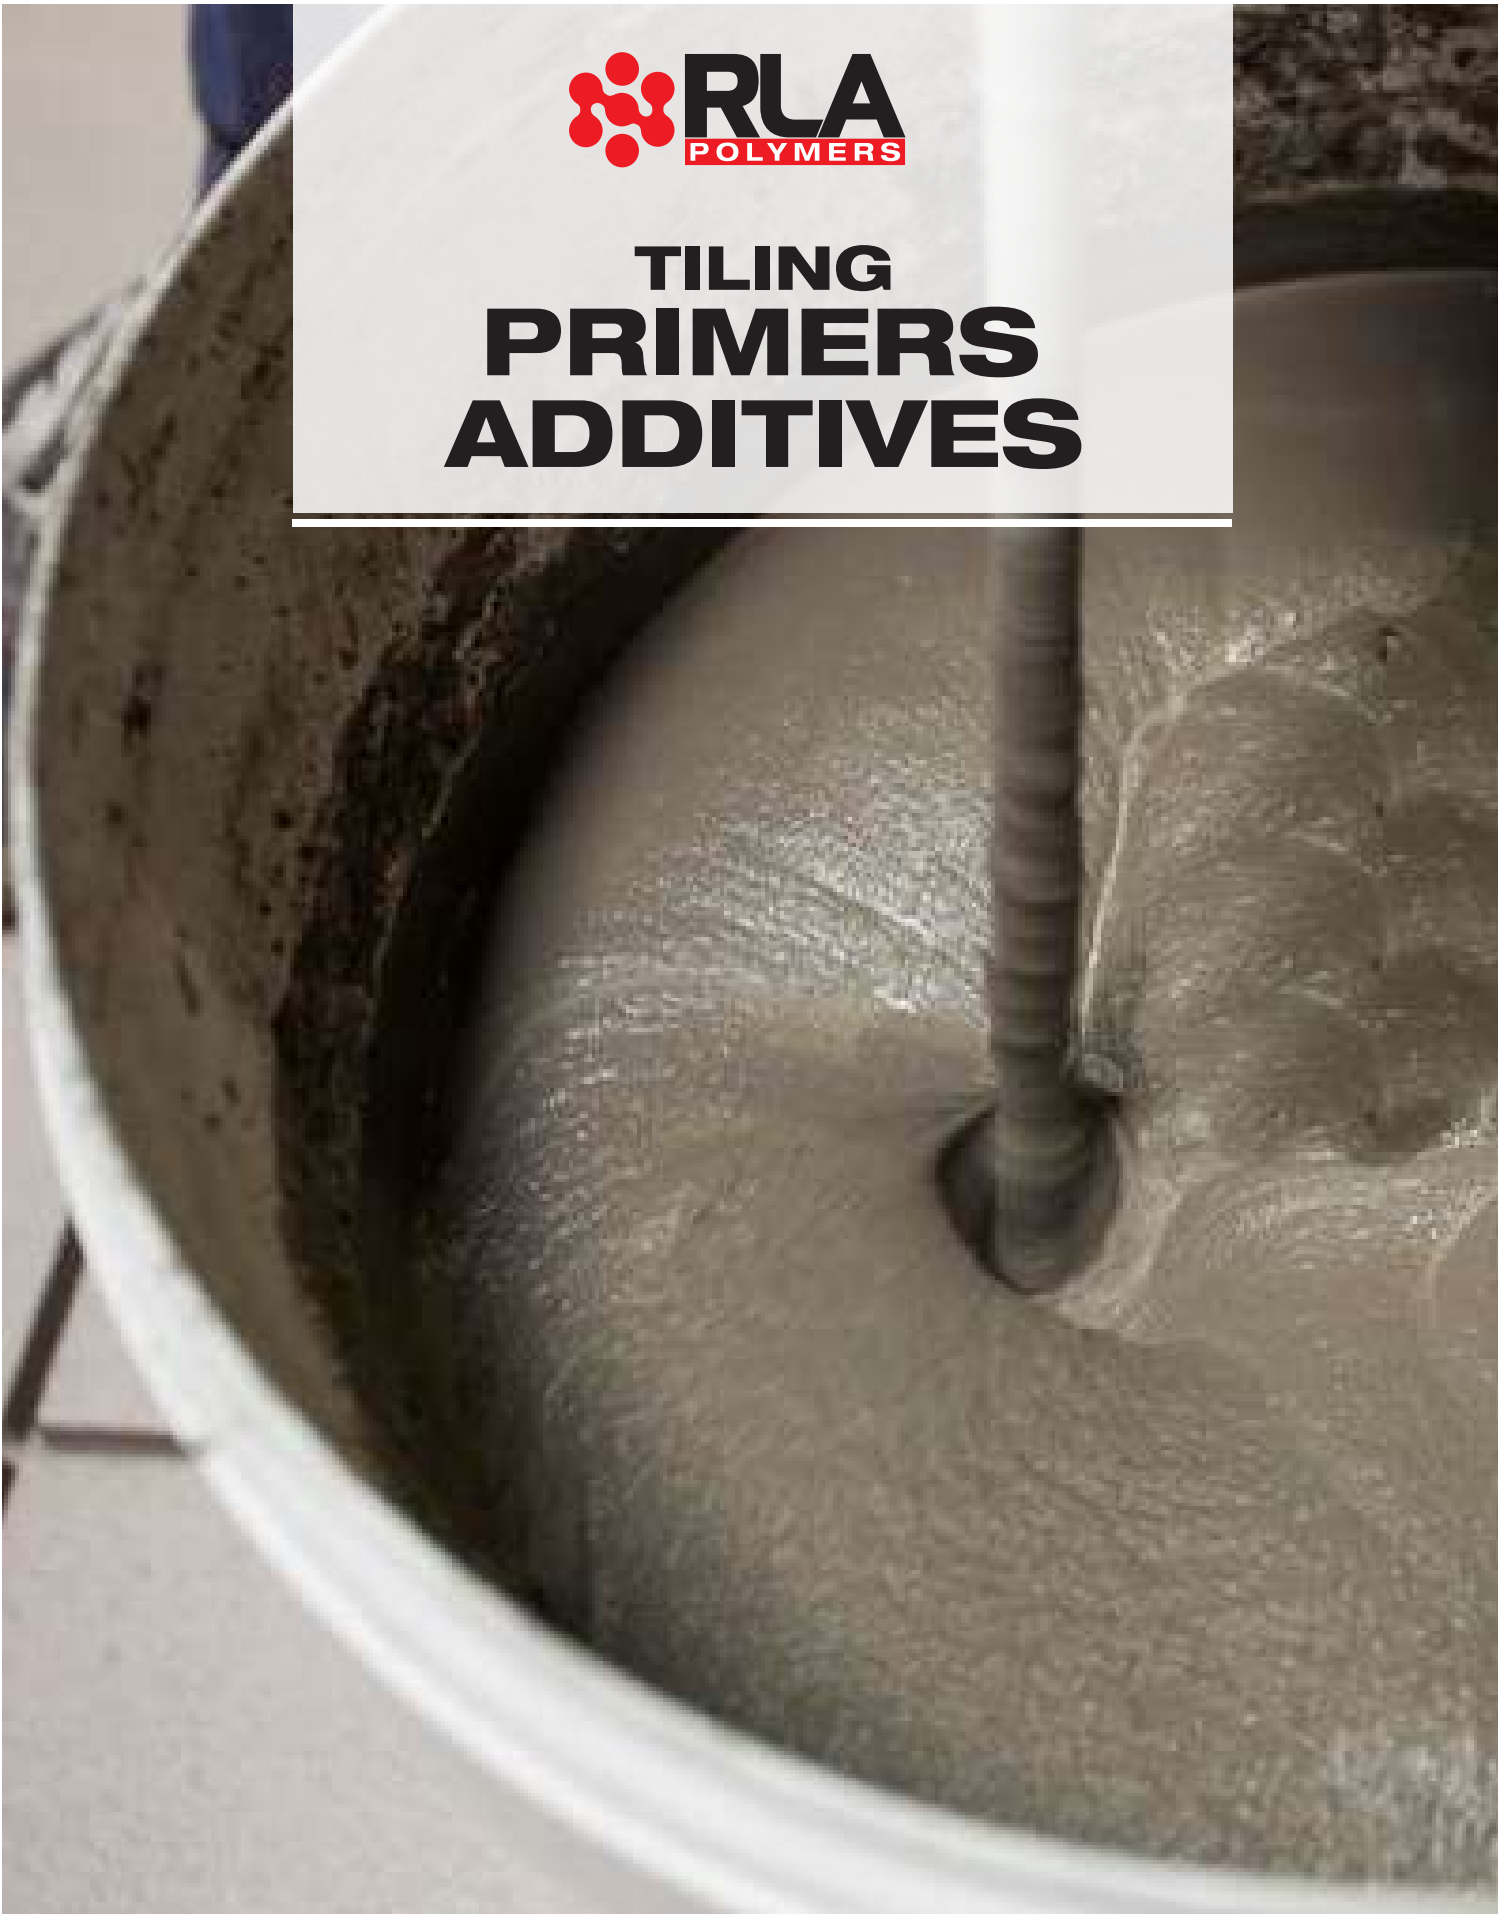

Primers
Additives
Admixtures

**TRADIES
TRUST**

NEW



Porous Primer

Acrylic based primer for porous surfaces

RLA Porous is an acrylic based universal wall / floor primer for use on porous surfaces prior to the application of RLA tile adhesives. It increases the adhesion of tile adhesives onto the substrate and can be applied a variety of common building substrates.

ADVANTAGES

- Internal / External
- Floors / Walls
- Waterbased

SUBSTRATES

- Porous concrete / FC Sheeting
- Plasterboard
- Rendered brickwork, block work

QUICK REF GUIDE

Colour	Dries - Clear
Uses	Wall / Floor
Coverage	8-10m² per litre
Dry Time	30 Minutes
Size- Code	5L - RL7175-5
	20L - RL7175-20

REPLACING RLA UNIPRIME

NEW



Non-Porous Primer

Water based acrylic primer for non prrous surfaces

RLA Non-Porous Primer is a rapid drying, solvent free, low VOC, water based acrylic primer. For use over porous and non porous substrates such as existing tiles, old paint (with the exception of oil based paints), vinyl adhesive, vinyl tiles, carpet adhesive residue, metal surfaces, sealed or burnished concrete floors.

ADVANTAGES

- Rapid drying
- Low voc
- Can be diluted
(for porous surfaces only
- Porous /Non porous substrates

SUBSTRATES

- Cement based tile adhesive residue
- Concrete, grout, screed, render
- Concrete
- FC Sheet

QUICK REF GUIDE

Colour	Blue
Area	Internal External
Uses	Wall floor
Coverage	7-10m² per litre
Dry Time	30 - 60 Minutes
Size- Code	5L - RL8502-5
	20L - RL8502-20

REPLACING RLA UNIVERSAL PRIMER

NEW



Plastinex

Flexible Acrylic Additive.

Plastinex is a white, high solids, flexible acrylic additive. It can be used internally or externally on wall and floor surfaces. Plastinex when mixed with RLA cement based adhesives can be used to bond tiles over concrete, render, rendered brickwork, blockwork.

ADVANTAGES

- Grout additive for RLA grout range
- Adhesive booster for cement based tile adhesives
- Adhesive booster for pool tiling
- Additive for sand/cement screeds

SUBSTRATES

- Cement based tile adhesives
- Grouts, screed, render
- Concrete / FC sheeting
- Plasterboard

QUICK REF GUIDE

Colour	White
Area	Internal External
Coverage	Refer TDS
	Application Dependant
Size- Code	5L - RL7950-5
	20L - RL7950-20

REPLACING RLA UNIFLEX



QuickSet

Liquid additive cement accelerator

Quick Set will accelerate the curing of any product that is based on Portland Cement. Quick Set is most effective in cold temperatures (5 to 15 degrees C). Quick Set will work differently depending on the nature of the product and the exact performance can only be established by trialing.

ADVANTAGES

- Fast drying
- Liquid additive
- Achieve initial strength
- Easy to use

MIX WITH

- Portland Cement Adhesives
- Cement grouts
- Renders and screeds
- RLA Mastik, MoreFlex, AddFlextra etc

QUICK REF GUIDE

Colour	Blue
Area	Internal External
Size- Cde	5L - RL7610-5



TruLevel **LEVELLING & SCREEDS**

Self Levelling Compounds
Screeds
Feather Finishes
Patch Repair

**TRADIES
TRUST**



TruLevel Econopro

Self-smoothing general purpose cementitious underlay

Tru Level Econo Pro is a specially formulated floor levelling compound designed to achieve a smooth flat surface for application of internal carpet, tiles, vinyl, direct stick timber flooring and floating floor systems.

ADVANTAGES

- Excellent flow
- 1-30mm per application
- Large areas
- Eliminate sand screeds

COMPRESSIVE STRENGTH Mpa

1 Day	>10
7 Days	>25
28 Days	>30

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>5
28 Days	>6



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	12m² at 1mm 4m² at 3mm
Dry Time	3-4 Hrs
Floor Covering	16 Hrs
Install Time	
Size- Code	20KG - 430074



TruLevel Econopro Plus

Resilient and textile flooring cementitious underlay

Tru Level Econo Pro Plus is a premium floor levelling compound designed to achieve a superior smooth flat surface for application of internal carpet, tiles, vinyl, direct stick timber flooring and floating floor systems.

ADVANTAGES

- Excellent flow
- 1-30mm per application
- Large areas
- Eliminate sand screeds

COMPRESSIVE STRENGTH Mpa

1 Day	>10
7 Days	>25
28 Days	>30

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>5
28 Days	>6



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	12m² at 1mm 4m² at 3mm
Dry Time	3-4 Hrs
Floor Covering	12 Hrs
Install Time	
Size- Code	20KG - 430103



TruLevel BulkFill UT

High build, self levelling, cementitious flooring underlay

TruLevel Bulkfill UT is a high build self levelling compound with excellent flow properties formulated for self-levelling differences 100 mm in thickness on new or existing internal concrete substrates

ADVANTAGES

- Excellent flow
- Up to 100mm
- Pumpable
- CT-C30-F7 acc. EN 13813

COMPRESSIVE STRENGTH Mpa

1 Day	>15
7 Days	>20
28 Days	>30

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>5
28 Days	>6



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	2.4m² at 5mm
Dry Time	2-3 Hrs
Floor covering	24-36 Hrs
Size- Code	20KG - 430081



TruLevel Flexi Leveller

Flexible levelling compound

RLA Flexi Leveller is a rapid drying self levelling compound with excellent flow properties formulated for levelling differences from 1 to 15mm in thickness on new or existing internal concrete and timber substrates. It develops a smooth and even surface with high levels of mechanical resistance, ensuring the subsequent installation of floor coverings.

ADVANTAGES

- Enhanced Flexibility
- Thickness 1mm - 20mm
- Fibre reinforced
- Pump application

COMPRESSIVE STRENGTH Mpa

1 Day	>8
7 Days	>15
28 Days	>20

FLEXURAL STRENGTH Mpa

1 Day	>2
7 Days	>5
28 Days	>7

Recommended Surfaces ● Timber ● Concrete/cement

QUICK REF GUIDE

Colour	Light grey
Area	Internal
Coverage	4m² at 3mm
Dry Time	3-4 Hrs
Floor covering	12hrs vinyl/24hrs timber
Size- Code	20KG - 430060



TruLevel TuffTop

Heavy duty, high performance internal/ external self levelling cementitious overlay

Tuff Top is rapid drying self-levelling compound with excellent flow properties on new or existing internal/external concrete substrates.

ADVANTAGES

- Concrete
- 3 to 30mm
- Shrinkage compensated
- Excellent adhesion

COMPRESSIVE STRENGTH Mpa

1 Day	>10
7 Days	>35
28 Days	>43

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>6
28 Days	>8

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Coverage	4m² at 3mm
Dry Time	3 Hours
Floor covering	24 Hrs
Size- Code	20KG - 430090



TruLevel RapidPatch

Rapid hardening and drying high strength repair mortar

Tru Level Rapid Patch is a polymer modified, rapid hardening and drying, high early strength, rapid drying, slump- free and shrinkage compensated repair mortar for vertical and horizontal flooring.

ADVANTAGES

- Rapid drying
- Upto 40mm
- Trafficable 45min
- Excellent adhesion

COMPRESSIVE STRENGTH Mpa

1 Day	>25
7 Days	>32
28 Days	>45

FLEXURAL STRENGTH Mpa

1 Day	>5
7 Days	>8
28 Days	>10

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Coverage	4m² at 3mm
Dry Time	45 min
Floor covering	2 Hrs
Size- Code	20KG - 430084



F23 Feather

Skim Coating Compound

F23 Feather is a rapid drying cement based smoothing compound providing a smooth finish and even surface to a variety of internal substrates, prior to the application of floor covering

ADVANTAGES

- Excellent coverage
- Concrete & timber substrates
- Rapid drying
- Install floor coverings after 20min

Recommended Surfaces ● Timber ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	10m² at 1mm
Dry Time	20-30 min
Size- Code	15KG - 206067





TruLevel EconoScreed Rapid

Rapid drying, slump free, high early strength screed.

EconoScreed Rapid is a ready-to-use, rapid hardening and drying, high early strength, slump-free and shrinkage compensated screed for flooring. EconoScreed Rapid may be used for internal and external applications. Mixed screed accepts light foot traffic after 2 hour and can be tiled over in 4 hours.

ADVANTAGES

- Floor Covering in 24 Hrs
- Internal
- Pumpable
- CT C30-F6 / EN 13813

COMPRESSIVE STRENGTH Mpa

1 Day	>30
7 Days	>50
28 Days	>65

FLEXURAL STRENGTH Mpa

1 Day	>5
7 Days	>8
28 Days	>10

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal External
Coverage	1.0m² @ 10mm
Dry Time	1.5-2 Hrs
Floor Coverings	4-6 Hrs Ceramic tiles 24 Hrs Resilient & Wood
Size - Code	20KG RL7187-20



TruLevel EconoScreed

Engineered Cementitious Floor Screed

EconoScreed is a ready-to-use, slump-free and shrinkage-compensated engineered screed suitable for internal and external applications. Maintains high strength at low builds and has excellent water resistance. Accepts light foot traffic after 8 hours and can be tiled over in 24 hours.

ADVANTAGES

- Excellent flow
- Up to 80mm
- Quality surface finish
- CT-C30-F6 acc. EN 13813

COMPRESSIVE STRENGTH Mpa

1 Day	>7
7 Days	>20
28 Days	>30

FLEXURAL STRENGTH Mpa

1 Day	>2
7 Days	>4
28 Days	>6

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal External
Coverage	1.0m² @ 10mm
Dry Time	4-6 Hours
Floor coverings	24 Hrs Ceramic tiles
Size- Code	20KG - 430091



Universal Primer

Water based acrylic primer

RLA Universal Primer is a rapid drying, solvent free, low VOC, water based acrylic primer. For use over porous and non porous substrates such as existing tiles, old paint (with the exception of oil based paints), vinyl adhesive, vinyl tiles, carpet adhesive residue, metal surfaces, sealed or burnished concrete floors.

ADVANTAGES

- Rapid drying
- Low voc
- Can be diluted
(for porous surfaces only
- Porous /Non porous

SUBSTRATES


- Cement based tile adhesive residue
- Concrete, grout, screed, render
- Concrete
- FC Sheet

QUICK REF GUIDE

Colour	Green
Area	Internal External
Uses	Wall floor
Coverage	7-10m² per litre
Dry Time	30 - 60 Minutes
Size- Code	1L - RL7167-1 5L - RL7167-5 20L - RL7167-20



CONSTRUCTION GROUTS

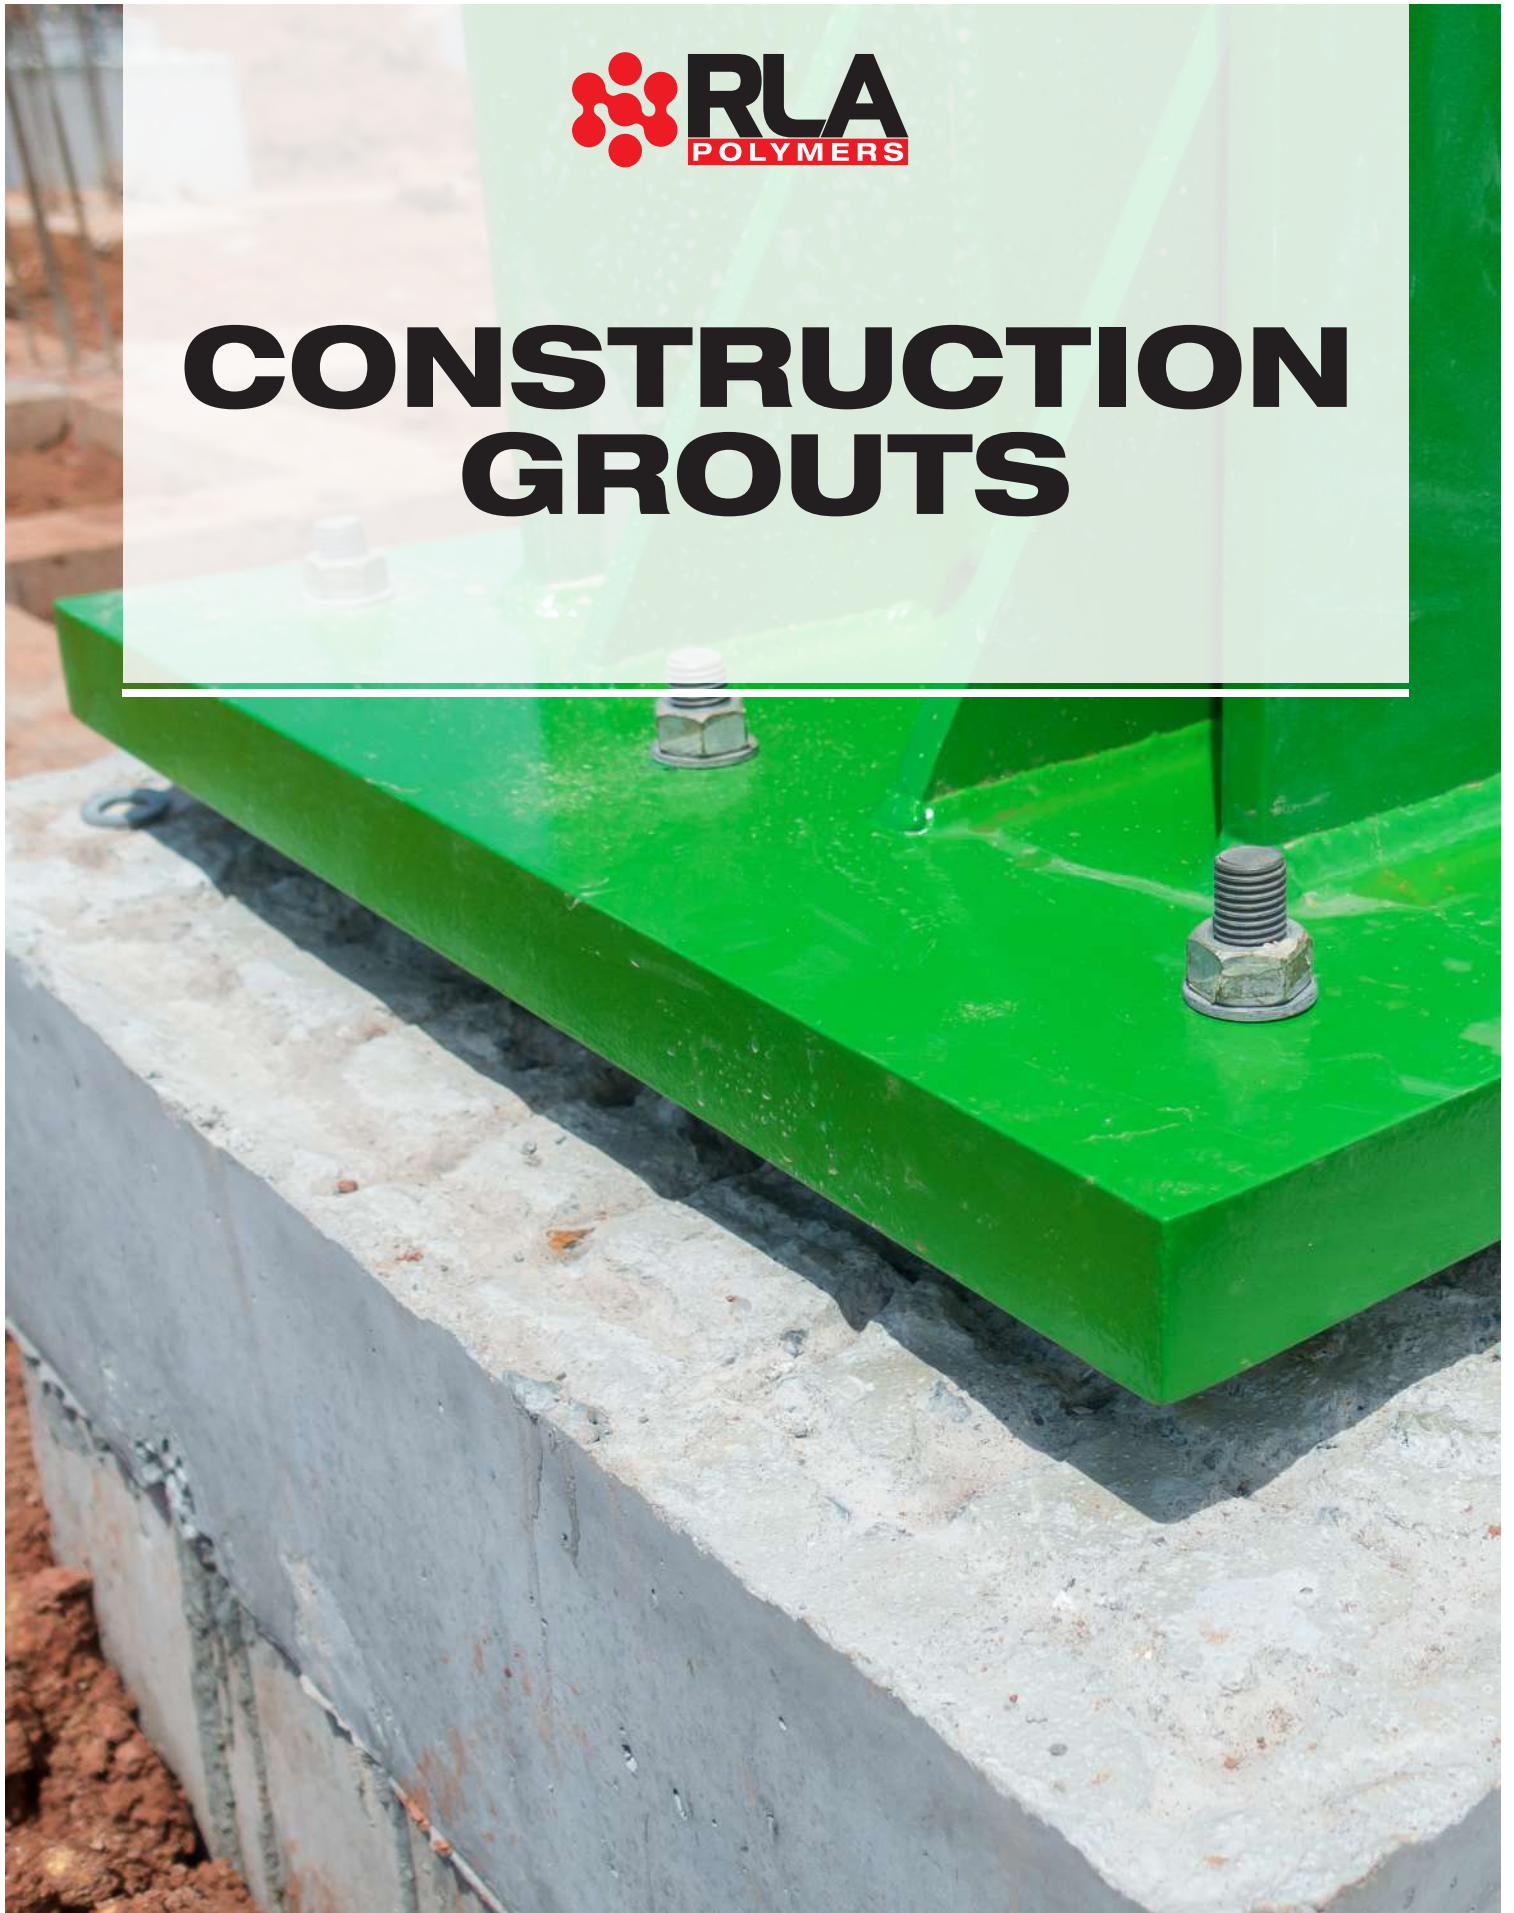

Cementitious
Epoxy
Epoxy Anchors

**TRADIES
TRUST**



PenaFlow PanelGrout

General purpose non shrink Class A Cementitious grout

Penaflow Panel Grout is a general purpose construction grout based on a blend of Portland cement, high quality graded aggregates and additives, which control expansion whilst the grout is in a plastic state. Suitable for underpinning amongst many other uses.

ADVANTAGES

- Anchor bolt filling
- 20 to 150mm
- Block work filling
- Shrinkage compensated

COMPRESSIVE STRENGTH Mpa

1 Day	>20
7 Days	>35
28 Days	>55

FLEXURAL STRENGTH Mpa

1 Day	>1.5
7 Days	>8.5
28 Days	>9.5



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20Kg
Dry Time	3-4 Hours
Size- Code	20KG - 204039



PenaFlow UW Grout

Specially designed grout for under water applications

Penaflow Grout UW is a specially formulated construction grout made for underwater applications. UW Grout will not wash out when submerged in water, and is ideal for underwater concrete piling, or concrete piling in wet or damp conditions, and re-instatement of dam walls.

ADVANTAGES

- Dam Walls
- Anchor bolt filling
- Displaces water
- Durable

COMPRESSIVE STRENGTH Mpa

1 Day	>20
7 Days	>40
28 Days	>55

FLEXURAL STRENGTH Mpa

1 Day	>1.5
7 Days	>8.5
28 Days	>9.5



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20Kg
Dry Time	3-4 Hrs
Size- Code	20KG - 206060



PenaFlow GP Grout

General purpose, high performance non shrink, class A cementitious grout

Class A general purpose construction grout suitable for anchor bolts filling, filling in cavities, gaps and base infills, and filling in core holes created in panels by core drilling. GP Grout is pumpable for larger applications.

ADVANTAGES

- Dam Walls
- Anchor bolt filling
- Displaces water
- Durable

COMPRESSIVE STRENGTH Mpa

1 Day	>32
7 Days	>50
28 Days	>70

FLEXURAL STRENGTH Mpa

1 Day	>4.3
7 Days	>8.5
28 Days	>9.8



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20Kg
Dry Time	3-4 Hours
Size- Code	20KG - 206062



PenaTech LA Grout

Micro concrete cementitious grout, designed for large or deep pour applications.

High performance, micro concrete, high flow (Class C) cementitious grout designed for large or deep pour applications upto 850mm

ADVANTAGES

- Class C
- Flowable or fluid
- Under pinning
- Excellent flow
- Deep pour applications

COMPRESSIVE STRENGTH Mpa

1 Day	>22
7 Days	>59
28 Days	>67

FLEXURAL STRENGTH Mpa

1 Day	>3.9
7 Days	>9.8
28 Days	>10.5



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20Kg
Dry Time	4-5 Hours
Size- Code	20KG - 206061



PenaTech HES Grout

High early strength Class C, Fast setting, non shrink construction grout

Penatech HES Grout is a high early strength gain, flowable, shrinkage compensated, Class C grout for use where rapid strength gain is required.

ADVANTAGES

- Bridge bearing panels
- Heavy Duty
- High early strength
- Balustrades

COMPRESSIVE STRENGTH Mpa

1 Day	>60
7 Days	>75
28 Days	>85

FLEXURAL STRENGTH Mpa

1 Day	>5.3
7 Days	>8.8
28 Days	>9.8



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20KG
Dry Time	20-30 Minutes
Size- Code	20KG - 205047



PenaTech HS Grout

High strength Class C, cementitious grout

Penatech HS Grout is a high strength, precision Class C grout. Non shrink dual expansion compensates for shrinkage in both the plastic and hardened state.

ADVANTAGES

- High early strength
- High ultimate strength
- Can be dry packed

COMPRESSIVE STRENGTH Mpa

1 Day	>35
7 Days	>75
28 Days	>85

FLEXURAL STRENGTH Mpa

1 Day	>3.9
7 Days	>7.0
28 Days	>9.5



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Yield	11L per 20KG
Dry Time	3-4 Hours
Size- Code	20KG - 206051



PenaTech HS Plus Grout

Very high ultimate strength, class C, cementitious grout

Penaflo HS Plus Grout is a very high performance, precision grout with high ultimate strength dual expansion. Class C compensated for shrinkage

ADVANTAGES

- Pumpable
- 10mm to 150mm
- Block work core filling

COMPRESSIVE STRENGTH Mpa

1 Day	>45
7 Days	>80
28 Days	>95

FLEXURAL STRENGTH Mpa

1 Day	>3.9
7 Days	>7.0
28 Days	>9.5



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Light grey
Area	Internal / External
Yield	11L per 20KG
Dry Time	3-4 Hours
Size- Code	20KG - 206052



Epigrout S Kit

High Strength, fluid epoxy grout

Epigrout S is a two component, pre filled epoxy grout, suitable for use as a pourable or fluid grouting material. Can be applied underwater and is chemical resistant.

ADVANTAGES

- 100% solid epoxy
- Bonds to damp services
- High flow properties
- Grouting 5-120mm
- High chemical resistance

COMPRESSIVE STRENGTH Mpa

1 Day	>65
7 Days	>105
28 Days	>115

FLEXURAL STRENGTH Mpa

1 Day	>20
7 Days	>27
28 Days	>30



Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Light grey
Area	Internal / External
Yield	15m² @ 1mm
Dry Time	40-45 Min - unfilled 60-80 Min - filled
Size- Code	15L - 222075

Anchorbolt EP



Rapid hardening, high strength epoxy repair mortar
Anchorbolt EP is a high strength epoxy paste for anchoring fixings into concrete and use as a general purpose adhesive.
Anchorbolt EP is particularly suited for bonding precast concrete components to each other. Final compressive strength >95Mpa

ADVANTAGES

- High strength
- Durability
- Easy application
- Suitable for damp surfaces

USES

- Chemical anchoring
- Epoxy adhesive
- Concrete repair
- Bonding new to old concrete

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour **Light grey**

Area **Internal / External**

Dry Time **45-55 Minutes**

Size- Code **6L - 252030**





ADMIXTURES



Admixtures

**TRADIES
TRUST**



No. 2 Waterproofer

Integral Water Resisting Admixture

Integral water resisting admixture for concrete and masonry, above or below ground. Recommended for use where coloured mortar or integral floor colours are used.

ADVANTAGES

- Water Based formula – safe to use.
- Economical solution.
- Improved mix workability.
- Improved durability.
- Suitable for most after trades.

USES

- Mortar additive to improve workability

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	White liquid
Area	Internal / External
Size- Code	5L - RL9409-5
	20L - RL9409-20



CreteBond

Premium water based polymer

CreteBond is a versatile polymer emulsion used for a wide range of applications in general construction and around the home.

ADVANTAGES

- High solids polymer
- High bond strength
- Water based

USES

- Bonding new to old concrete
- Bonding render and hard plaster
- Sealing internal concrete and masonry surfaces
- Admixture for improving the properties of mortar, render and concrete

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	White liquid
Area	Internal / External
Size- Code	2L - 322033
	5L - 322031
	20L - 322030



Mortarlox

Concentrated Mortar Plasticiser

Mortarlox is used in Portland cement based mortar applications to obtain improved workability, cohesion, uniformity, water retention and ease of placement.

ADVANTAGES

- Suitable for light coloured mortars
- Concentrated formula
- Reduces segregation and bleeding
- Improves frost resistance

USES



- Mortar additive to improve workability

QUICK REF GUIDE

Colour	Dark brown liquid
Area	Internal / External
Size- Code	5L - 103011
	20L - 103010



ALL IN ONE TIMBER FLOORING ADHESIVE



RLA X3 SMP Timber Flooring Adhesive is recommended for bonding, Solid Timber Flooring and Engineered Timber Flooring to Concrete and Timber Substrates. RLA X3 SMP Timber Flooring Adhesive can also be applied to concrete substrates with underfloor heating.

3 x Faster
3 x The Savings
3 x Less Work

••ENGINEERED WITH••
SMP
TECHNOLOGY

VIC

215 Colchester Rd
(PO Box 147)
Kilsyth VIC 3137

NSW

5A 246 Miller Rd
Villawood
NSW 2163

QLD

1/91 Rudd St
Oxley
QLD 4075

WA

24 Hanwell Way
Bassendean
WA 6054

SA

Unit 2/7 Berger Rd
Wingfield
SA 5013