

A photograph of a modern living room with light-colored wood-look flooring. In the center is a dark wood TV console with a television. To the left is a wooden coffee table. To the right is a colorful armchair with red, orange, and grey panels. A potted plant sits on the console. A window with white curtains is on the left. The text "FLOORING PRODUCT RANGE" is overlaid in a white box at the top.

FLOORING

PRODUCT RANGE

26

Adhesives
Primers
Sealers
Tapes
Levellers

Universal Resilient Flooring Adhesive

For a wide range of floor coverings

STRONG INITIAL TACK

GREEN STAR COMPLIANT

SOLVENT FREE & LOW ODOUR

ANTIMICROBIAL FORMULATION

LOW VOC EMISSION



An acrylic, co-polymer, hard set adhesive with strong initial tack and bond strength qualities for a range PVC vinyl and textile floorcoverings.

It has excellent plasticiser resistance and non staining properties. It is for interior use only and is protected against bio-degradation, withstands normal wet cleaning practices and is suitable for use over underfloor heating installations.

USES

- PVC Vinyl sheeting products.
- Natural rubber up to 4mm.
- PVC vinyl plank & tiles.
- Vinyl composite tiles.
- Linoleum.

T: 1800 242 931

sales@rlapolymers.com.au

TRADIES TRUST



TruLevel **LEVELLING & SCREEDS**

Self Levelling Compounds
Screeds
Feather Finishes
Patch Repair

**TRADIES
TRUST**



TruLevel Econopro

Self-smoothing general purpose cementitious underlay

Tru Level Econo Pro is a specially formulated floor levelling compound designed to achieve a smooth flat surface for application of internal carpet, tiles, vinyl, direct stick timber flooring and floating floor systems.

ADVANTAGES

- Excellent flow
- 1-30mm per application
- Large areas
- Eliminate sand screeds

COMPRESSIVE STRENGTH Mpa

1 Day	>10
7 Days	>25
28 Days	>30

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>5
28 Days	>6

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	12m² at 1mm 4m² at 3mm
Dry Time	3-4 Hrs
Floor Covering	16 Hrs
Install Time	
Size- Code	20KG - 430074



TruLevel Econopro Plus

Resilient and textile flooring cementitious underlay

Tru Level Econo Pro Plus is a premium floor levelling compound designed to achieve a superior smooth flat surface for application of internal carpet, tiles, vinyl, direct stick timber flooring and floating floor systems.

ADVANTAGES

- Excellent flow
- 1-30mm per application
- Large areas
- Eliminate sand screeds

COMPRESSIVE STRENGTH Mpa

1 Day	>10
7 Days	>25
28 Days	>30

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>5
28 Days	>6

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	12m² at 1mm 4m² at 3mm
Dry Time	3-4 Hrs
Floor Covering	12 Hrs
Install Time	
Size- Code	20KG - 430103



TruLevel BulkFill UT

High build, self levelling, cementitious flooring underlay

TruLevel Bulkfill UT is a high build self levelling compound with excellent flow properties formulated for self-levelling differences 100 mm in thickness on new or existing internal concrete substrates

ADVANTAGES

- Excellent flow
- Up to 100mm
- Pumpable
- CT-C30-F7 acc. EN 13813

COMPRESSIVE STRENGTH Mpa

1 Day	>15
7 Days	>20
28 Days	>30

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>5
28 Days	>6

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	2.4m² at 5mm
Dry Time	2-3 Hrs
Floor covering	24-36 Hrs
Size- Code	20KG - 430081



TruLevel Flexi Leveller

Flexible levelling compound

RLA Flexi Leveller is a rapid drying self levelling compound with excellent flow properties formulated for levelling differences from 1 to 15mm in thickness on new or existing internal concrete and timber substrates. It develops a smooth and even surface with high levels of mechanical resistance, ensuring the subsequent installation of floor coverings.

ADVANTAGES

- Enhanced Flexibility
- Thickness 1mm - 20mm
- Fibre reinforced
- Pump application

COMPRESSIVE STRENGTH Mpa

1 Day	>8
7 Days	>15
28 Days	>20

FLEXURAL STRENGTH Mpa

1 Day	>2
7 Days	>5
28 Days	>7

Recommended Surfaces ● Timber ● Concrete/cement

QUICK REF GUIDE

Colour	Light grey
Area	Internal
Coverage	4m² at 3mm
Dry Time	3-4 Hrs
Floor covering	12hrs vinyl/24hrs timber
Size- Code	20KG - 430060



TruLevel TuffTop

Heavy duty, high performance internal/ external self levelling cementitious overlay

Tuff Top is rapid drying self-levelling compound with excellent flow properties on new or existing internal/external concrete substrates.

ADVANTAGES

- Concrete
- 3 to 30mm
- Shrinkage compensated
- Excellent adhesion

COMPRESSIVE STRENGTH Mpa

1 Day	>10
7 Days	>35
28 Days	>43

FLEXURAL STRENGTH Mpa

1 Day	>3
7 Days	>6
28 Days	>8

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Coverage	4m² at 3mm
Dry Time	3 Hours
Floor covering	24 Hrs
Size- Code	20KG - 430090



TruLevel RapidPatch

Rapid hardening and drying high strength repair mortar

Tru Level Rapid Patch is a polymer modified, rapid hardening and drying, high early strength, rapid drying, slump- free and shrinkage compensated repair mortar for vertical and horizontal flooring.

ADVANTAGES

- Rapid drying
- Upto 40mm
- Trafficable 45min
- Excellent adhesion

COMPRESSIVE STRENGTH Mpa

1 Day	>25
7 Days	>32
28 Days	>45

FLEXURAL STRENGTH Mpa

1 Day	>5
7 Days	>8
28 Days	>10

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal / External
Coverage	4m² at 3mm
Dry Time	45 min
Floor covering	2 Hrs
Size- Code	20KG - 430084



F23 Feather

Skim Coating Compound

F23 Feather is a rapid drying cement based smoothing compound providing a smooth finish and even surface to a variety of internal substrates, prior to the application of floor covering

ADVANTAGES

- Excellent coverage
- Concrete & timber substrates
- Rapid drying
- Install floor coverings after 20min

Recommended Surfaces ● Timber ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal
Coverage	10m² at 1mm
Dry Time	20-30 min
Size- Code	15KG - 206067





TruLevel EconoScreed Rapid

Rapid drying, slump free, high early strength screed.

EconoScreed Rapid is a ready-to-use, rapid hardening and drying, high early strength, slump-free and shrinkage compensated screed for flooring. EconoScreed Rapid may be used for internal and external applications. Mixed screed accepts light foot traffic after 2 hour and can be tiled over in 4 hours.

ADVANTAGES

- Floor Covering in 24 Hrs
- Internal
- Pumpable
- CT C30-F6 / EN 13813

COMPRESSIVE STRENGTH Mpa

1 Day	>30
7 Days	>50
28 Days	>65

FLEXURAL STRENGTH Mpa

1 Day	>5
7 Days	>8
28 Days	>10

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal External
Coverage	1.0m² @ 10mm
Dry Time	1.5-2 Hrs
Floor Coverings	4-6 Hrs Ceramic tiles 24 Hrs Resilient & Wood
Size - Code	20KG RL7187-20



TruLevel EconoScreed

Engineered Cementitious Floor Screed

EconoScreed is a ready-to-use, slump-free and shrinkage-compensated engineered screed suitable for internal and external applications. Maintains high strength at low builds and has excellent water resistance. Accepts light foot traffic after 8 hours and can be tiled over in 24 hours.

ADVANTAGES

- Excellent flow
- Up to 80mm
- Quality surface finish
- CT-C30-F6 acc. EN 13813

COMPRESSIVE STRENGTH Mpa

1 Day	>7
7 Days	>20
28 Days	>30

FLEXURAL STRENGTH Mpa

1 Day	>2
7 Days	>4
28 Days	>6

Recommended Surfaces ● Concrete/cement

QUICK REF GUIDE

Colour	Grey
Area	Internal External
Coverage	1.0m² @ 10mm
Dry Time	4-6 Hours
Floor coverings	24 Hrs Ceramic tiles
Size- Code	20KG - 430091



Universal Primer

Water based acrylic primer

RLA Universal Primer is a rapid drying, solvent free, low VOC, water based acrylic primer. For use over porous and non porous substrates such as existing tiles, old paint (with the exception of oil based paints), vinyl adhesive, vinyl tiles, carpet adhesive residue, metal surfaces, sealed or burnished concrete floors.

ADVANTAGES

- Rapid drying
- Low voc
- Can be diluted
(for porous surfaces only)
- Porous /Non porous

SUBSTRATES

- Cement based tile adhesive residue
- Concrete, grout, screed, render
- Concrete
- FC Sheet

QUICK REF GUIDE

Colour	Green
Area	Internal External
Uses	Wall floor
Coverage	7-10m² per litre
Dry Time	30 - 60 Minutes
Size- Code	1L - RL7167-1 5L - RL7167-5 20L - RL7167-20



TEXTILE FLOORING ADHESIVES



Adhesives
Pressure sensitive

**TRADIES
TRUST**

Textile Flooring Adhesives



Universal Pressure Sensitive Adhesive

Universal pressure sensitive adhesive

A solvent free pressure sensitive adhesive formulated for installing PVC backed, fibre backed, cushion back carpet tiles and reinforced vinyl composition tiles. For installing laminated slab underlays used in Double-Bond carpet installation. It can be applied to concrete substrates with moisture contents up to 95% Relative Humidity tested with the In- Situ Probe method and concrete substrates with pH readings of up to 12.0

ADVANTAGES

- Green Star Compliant
- Strong Initial Tack
- Solvent Free & low odour
- Anti-microbial Formulation

USES:

- Most types of vinyl composition tiles
- Laminated slab underlays used in Double-Bond carpet installation.

QUICK REF GUIDE

Coverage	5m²/L with V1 trowel 3m²/L with V2 trowel 8-10m²/L with roller
Area	Internal
Tack time	30min @ 20°C
Dry time	24 hours
Size- Code	15L 900140



Carpet Tile PS Adhesive

Solvent free pressure sensitive adhesive

RLA Carpet Tile PS Adhesive is a solvent free pressure sensitive adhesive formulated for installing PVC backed and modified composite backed Carpet Tiles. RLA Carpet Tile PS Adhesive can be applied to concrete substrates with moisture contents up to 95% relative humidity tested by way of In- Situ Probe method and concrete substrates with pH readings of up to 12.0.

ADVANTAGES

- High RH resistant
- Solvent Free & low odour
- Anti-microbial Formulation

USES:

- PVC backed, cushioned backed & modified composite backed carpet tiles.

QUICK REF GUIDE

Coverage	8-10m²/L with a long Nap roller
Area	Internal
Tack time	30min-1hour @ 20°C
Dry time	24 hours
Size- Code	15L - 900150



Carpet Adhesive

For both Double Bond and Direct Stick installations

Water-based carpet adhesive providing a strong tacky film of adhesive that is suitable for bonding carpets both Double Bond and Direct Stick installations. The adhesive offers a quick grab and has sufficient working time for smaller and larger installations. The adhesive tacks up quickly and has excellent re-bonding for hard to hold carpets.

ADVANTAGES

- Strong Initial Tack
- Water Based
- Installer Friendly

USES:

- Slab dual bond underlay
- Backed woven carpets
- Woven, jute sided & latex foam laminated slab underlays.

QUICK REF GUIDE

Coverage	3m²/L with V2 trowel 2m²/L with V3 trowel
Area	Internal
Tack time	5-10 minutes @ 20°C
Dry time	24 hours
Size - Code	15L - 900160



RL6000 Synthetic Grass Adhesive

All weather, solvent based adhesive

RL6000 Synthetic Grass Carpet Adhesive is an all-weather solvent based (flammable) adhesive specifically formulated for the outdoor installation of non-stretch open weave polypropylene backed synthetic grass carpet. It develops high strength quickly and when cured will withstand unfavorable weather conditions.

ADVANTAGES

- Develops high strength
- Good water resistance
- Exterior usage

USES:

- Synthetic Grass Carpet
- Indoor / Outdoor Carpets

QUICK REF GUIDE

Coverage	2m²/L with V3 trowel 1.2m²/L with V5 trowel
Area	Internal External
Tack time	5-10 minutes
Dry time	24 hours
Size- Code	20L - RL6000-20



Carpet Latex Adhesive

Compounded latex adhesive

RLA Carpet Latex is a compounded latex product used for the sealing of raw edges, strengthening worn backing, replacing damaged nap and adhering pad underlays to Subfloors.

ADVANTAGES

- Water based
- Rollable / Brushable
- Fast drying

USES:

- Domestic underlays
- Sealing selvage
- Worn backing

QUICK REF GUIDE

Area	Internal
Dry time	4-5 hours
Size - Code	5L - 900170



RL1018 Fast Set

High quality PU adhesive

RL1018 is ideal for structural bonding where resistance to high temperatures and water is necessary. (confirms to Class D4-DIN EN 204).

ADVANTAGES

- High solids
- High strength
- Very economical
- Heat resistant

USES:

- Smoothedge, Gripper, Wood Products.
- Metal Trims, Nosings, Some ridged PVC

QUICK REF GUIDE

Area	Internal External
Setting time	15 minutes
Dry time	24 hours
Size- Code	310ml - RL1018-310ml



GS5 Seam Sealer

Water based

GS5 seam sealer is a solvent free, low odour, water based seam adhesive is designed to bond carpet seams together, once cured displays good water and heat resistance.

ADVANTAGES

- Heat/Water resistance
- Strong bond
- Australian made

USES:

- Bonding carpet edges together

QUICK REF GUIDE

Coverage	40-50 lineal meters
Area	Internal
Dry time	24 hours
Size - Code	1L - 900240



RLA's carpet adhesives have been manufactured in Australia for over 50 years.



TIMBER FLOORING ADHESIVES



MS Timber
SMP
Water based
Sealers

**TRADIES
TRUST**



MS Timber Flooring Adhesive

Isocyanate free permanently flexible adhesive

Permanently flexible solvent and isocyanate free MS timber flooring adhesive. For bonding approved acoustic underlays to most common subfloors. MS Timber Flooring Adhesive is also recommended for bonding solid timber flooring, Parquet flooring and engineered timber flooring to approved acoustic underlay as well as directly to most common subfloors.

ADVANTAGES

- Installer friendly
- Low VOC Emission
- Single part & permanently flexible
- Green tag certified

USES:

- Most types of timber floorcoverings.

QUICK REF GUIDE

Coverage	1-1.5m² depending on floorcovering.
Area	Internal
Tack time	30min @ 20°C
Dry time	24 hours
Size- Code	600ml - 620650 10L - 620653



HS Water Based Timber Adhesive

Specially designed for most types of timber floorcoverings

RLA HS is a high viscosity, high solids, trowellable, water-based vinyl acetate adhesive. For bonding Wood block and mosaic parquetry to timber substrates. It is also recommended for bonding Masonite, Plywood and Timber Sheeting underlayments to Timber and Concrete subfloors.

ADVANTAGES

- Non flammable
- Water based
- Easy to trowel and spread

USES:

- Wood block & mosaic parquetry
- Masonite, Plywood & Timber Sheeting underlayments

QUICK REF GUIDE

Coverage	1.5m²/L with V3 trowel
Area	Internal
Tack time	30min @ 20°C
Dry time	24 hours
Size- Code	15L - 900280



X3 Timber Flooring Adhesive

RLA X3 Timber Flooring Adhesive is a single-part, permanently flexible isocyanate free SMP Timber Flooring Adhesive.

SUITABLE RESIDUES:

- Non Flammable
- Green Star Compliant
- Isocyanate free
- 90% RH Resistant Formulation
- Vapour Barrier
- Easy to apply
- Noise Reducer
- Low VOC

SUBSTRATES

- Concrete
- Timber

QUICK REF GUIDE

Coverage	1-1.5m² depending on floorcovering.
Area	Internal
Tack time	30min @ 20°C
Dry time	24 hours
Size- Code	10L - 900581



Moisture Seal

Epoxy water vapour barrier

Moisture Seal is a high performance 2 part epoxy waterproofing system designed as a water and vapour proof coating under water proofing systems, coatings, tiles and Timber flooring. It is designed for floor and wall applications where durability, water, and chemical resistance are required.

ADVANTAGES

- Low VOC
- Withstands a head of Water Pressure up to 25 metres or 250Kpa
- Complies with AS 4020:2005 "Products in contact with drinking water"
- Complies with ASTM E96 Water vapor transmission
- Water based and user friendly


SUITABLE FOR USE:

- Primer for damp surfaces, scyon sheeting, membranes & more
- Areas where hydrostatic pressure is an issue.
- Sealing concrete slabs before vinyl and timber overlays
- Dust sealing for interior concrete floors
- Retaining Walls, Planter boxes, Concrete Tanks, Lift Wells
- Basements, Reservoirs, Aquaducts, Underground Carparks
- As a Basecoat coating in areas requiring seamless epoxy flooring

QUICK REF GUIDE

Mixing ratio	1:1 (component A:B)
Full cure	5-7 days@25°C & 50%RH
Dry film thickness	100 microns (approx.)
Wet film thickness	200 microns
Coverage	4-5m²/Litre
Size- Code	8LT Kit - 15636 20LT Kit - 15637

ALL IN ONE TIMBER FLOORING ADHESIVE

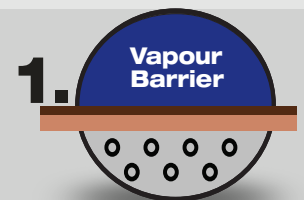

RLA X3 SMP Timber Flooring Adhesive is recommended for bonding, solid timber flooring and engineered timber flooring to concrete and timber substrates. RLA X3 SMP Timber Flooring Adhesive can also be applied to concrete substrates with underfloor heating.

3x Faster
3x The Savings
3x Less Work





RESILIENT FLOORING ADHESIVES



MS Timber
SMP
Water based
Sealers

**TRADIES
TRUST**



Universal Resilient Flooring Adhesive

Universal Adhesive for a wide range of Floor Coverings.

An acrylic co-polymer hard set adhesive with strong initial tack and bond strength qualities for a range PVC vinyl and textile floorcoverings. It has excellent plasticiser resistance and non staining properties. It is for interior use only and is protected against bio-degradation, withstands normal wet cleaning practices and is suitable for use over underfloor heating installations.

ADVANTAGES

- Strong initial tack
- Low VOC Emission
- Green Star Compliant
- Solvent Free & Low odour
- Anti-microbial Formulation

USES:

- PVC Vinyl sheeting products.
- Vinyl composite tiles.
- PVC vinyl plank & tiles.
- Natural rubber up to 4mm.
- Linoleum.

QUICK REF GUIDE

Coverage	5m²/L with V1 trowel 3m²/L with V2 trowel 2m²/L with V3 trowel
Area	Internal
Tack time	5-10 minutes @ 20°C
Dry time	24 hours
Size- Code	15L - 900130



265 Universal Vinyl Adhesive

Excellent plasticiser resistance and nonstaining properties

RLA 265 is a water based acrylic emulsion with excellent plasticiser resistance and nonstaining properties. It is protected against bio-degradation, withstands normal wet cleaning practices and is suitable for use over underfloor heating installations.

ADVANTAGES

- High initial grab
- Excellent plasticiser resistance
- Non-staining
- Withstands wet cleaning practices.

USES:

- Domestic vinyl sheet.
- Commercial vinyl sheet.
- Hard to hold carpets.

QUICK REF GUIDE

Coverage	5m²/L with V1 trowel 3m²/L with V2 trowel
Area	Internal
Tack time	30min @ 20°C
Dry time	24 hours
Size - Code	15L - 900100



999 Multi-Purpose PS Adhesive

Solvent free pressure sensitive adhesive

RLA 999 Pressure Sensitive Adhesive is a solvent free pressure sensitive adhesive formulated for installing PVC backed, fibre backed, cushion back carpet tiles and reinforced vinyl composition tiles. It is also highly recommended for installing laminated slab underlays used in Double-Bond carpet installation.

ADVANTAGES

- Low VOC & Solvent free
- Green Star Compliant
- Anti-microbial Formulation
- Low Odour

USES:

- PVC, fibre & cushion back carpet tiles
- Reinforced vinyl composition tiles.

QUICK REF GUIDE

Coverage	5m²/L with V1 trowel 3m²/L with V2 trowel 8-10m²/L with a long Nap roller
Area	Internal
Tack time	30min @ 20°C
Dry time	24 hours
Size- Code	15L - 900110



Vinyl Plank Adhesive

Water based acrylic adhesive

RLA Vinyl plank adhesive is a solvent free, low odour, low VOC water based acrylic emulsion with excellent plasticiser resistance and non staining properties. It is protected against bio-degradation, withstands normal wet cleaning practices and is suitable for use over underfloor heating installations.

ADVANTAGES

- Green Star Compliant
- Strong Initial Tack
- Solvent Free
- Anti-microbial Formulation
- Low Odour

USES:

- Luxury vinyl plank.
- Luxury vinyl tile.

QUICK REF GUIDE

Coverage	5m²/L with V1 trowel 3m²/L with V2 trowel
Area	Internal
Tack time	5-10 minutes @ 20°C
Dry time	24 hours
Size- Code	15L - 900120



HT Vinyl Plank Adhesive

High temperature hard set adhesive

HT Vinyl plank is an acrylic polymer, high temperature hard set adhesive with a short open time and excellent adhesion. It is fibre – reinforced and highly shear- resistant with excellent plasticiser migration resistance, non staining properties and provides resistance to temperature variations.

ADVANTAGES

- High shear strength
- Green Star Compliant
- Resists temp. changes
- Solvent Free & Low odour
- Anti-microbial Formulation

USES:

- Luxury vinyl plank.
- Luxury vinyl tile.
- Bay windows.
- Areas exposed to direct sunlight.

QUICK REF GUIDE

Coverage	5m²/L with V1 trowel 3m²/L with V2 trowel
Area	Internal
Tack time	1-5 minutes @ 20°C
Dry time	24 hours
Size- Code	15L - 900125



RL1000 Resilient Flooring Adhesive

Isocyanate free water resistant, resilient flooring adhesive

A single-part, VOC compliant isocyanate free water resistant resilient flooring adhesive. For use in wet areas for bonding approved vinyl, rubber and linoleum floor coverings to most common internal and external subfloors. It is suitable for areas that are exposed to sun light.

ADVANTAGES

- VOC Compliant.
- Water resistant
- Withstands heat

USES:

- Vinyl floorcoverings
- Rubber floorcoverings

QUICK REF GUIDE

Coverage	3-4m²/L V1 trowel 2-2.5m²/L V2 trowel
Area	Internal/External
Tack time	30min @ 20°C
Dry time	24 hours
Size- Code	14KG - RL1000-14



Brushable Contact Adhesive

Rapid drying contact cement

RLA Brush Contact Adhesive is a high quality brushable grade solvent based (flammable), rapid drying contact cement, which has high strength, excellent ageing and heat resistance.

RLA Brush Contact Adhesive is designed for use on most types of vinyls, PVC skirtings/ extrusions, coverstrips, plastic and metal treads.

ADVANTAGES

- Rapid drying
- High strength
- Aging resistant
- Heat resistant

USES:

- Vinyl, PVC & Metal
- Decorative Laminates, MDF, wood & wood Veneer, paper honeycomb

QUICK REF GUIDE

Coverage	5-7m²/L spread rates depend on substrate consistency
Area	Internal
Initial dry time	5-10 minutes @ 20°C
Size- Code	4L 900210 20L - 900200



Sprayable Contact Adhesive

High quality contact adhesive

RLA Sprayable contact adhesive is a high quality solvent based contact adhesive designed for easy application by spraying to bond a wide range of materials. It has excellent bond strength and high heat resistance. The high solids content gives outstanding economy of use.

ADVANTAGES

- High strength
- Very economical
- Heat resistant

USES:


- Vinyl, PVC & Metal
- Decorative Laminates, MDF, wood & wood Veneer, paper honeycomb

QUICK REF GUIDE

Coverage	6-8m²/L spread rates Depend on substrate Consistency
Area	Internal
Initial dry time	5-10 minutes @ 20°C
Size- Code	20L - 90020

Timber Flooring System

Complete Flooring Solutions

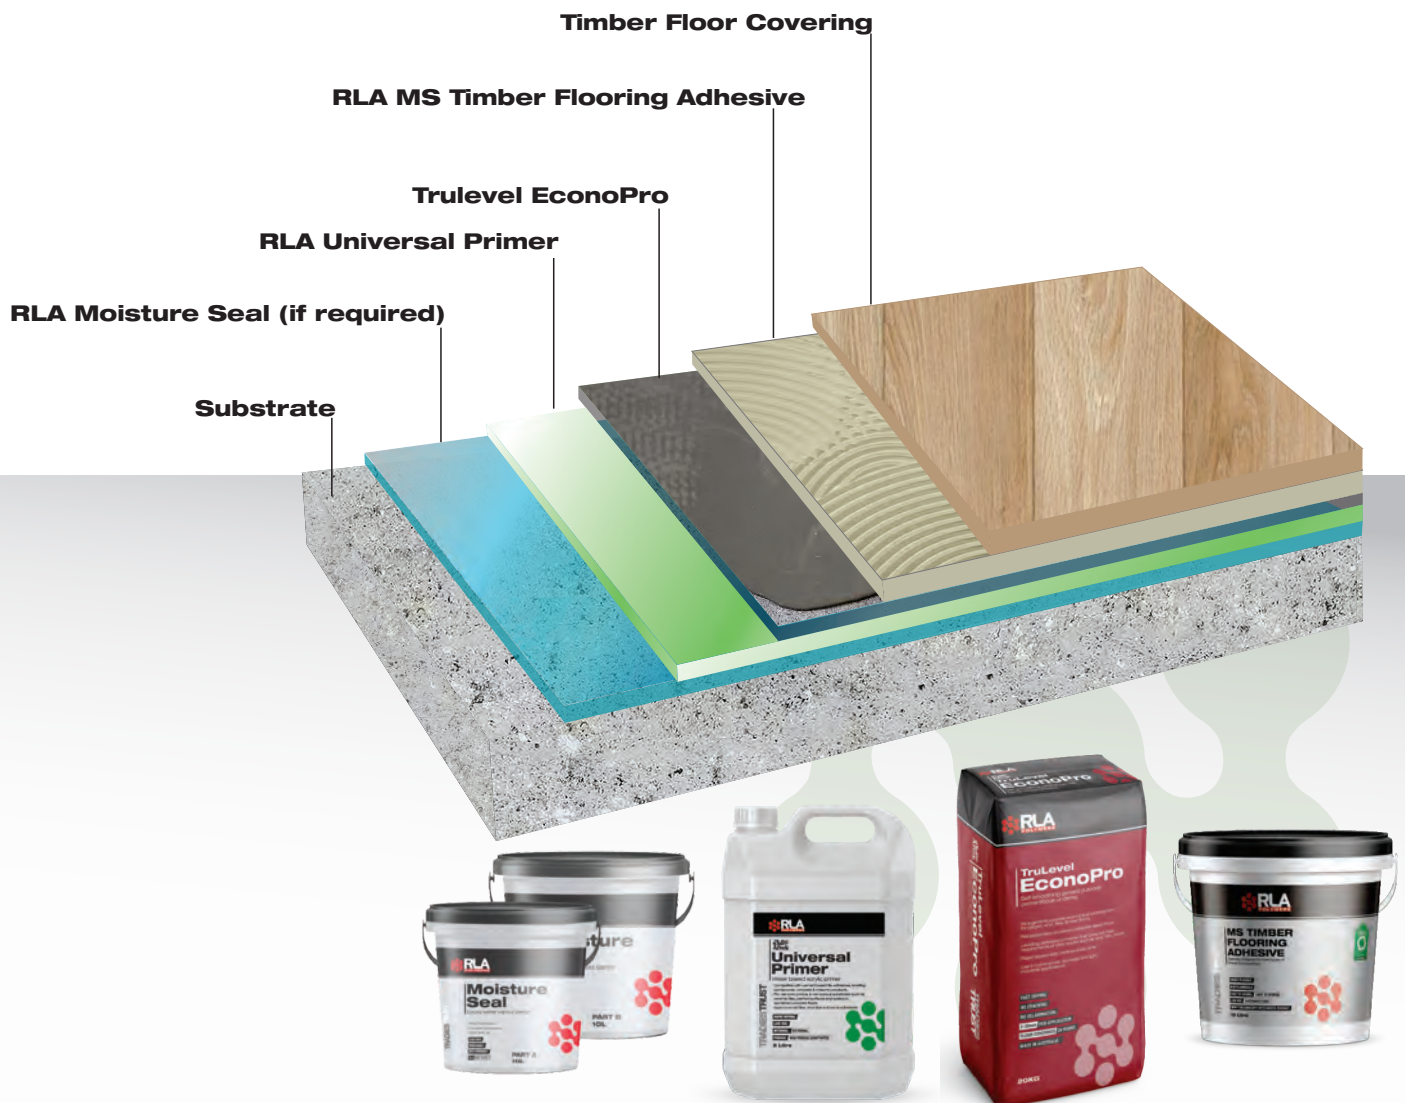

VIC

215 Colchester Rd
(PO Box 147)
Kilsyth VIC 3137

NSW

5A 246 Miller Road
Villawood
NSW 2163

QLD

1/91 Rudd Street
Oxley
QLD 4075

WA

24 Hanwell Way
Bassendean,
WA 6054

SA

2/7 Berger Road
Wingfield
SA 5013

Vinyl Flooring System

Complete Flooring Solutions



VIC

215 Colchester Rd
(PO Box 147)
Kilsyth VIC 3137

NSW

5A 246 Miller Road
Villawood
NSW 2163

QLD

1/91 Rudd Street
Oxley
QLD 4075

WA

24 Hanwell Way
Bassendean,
WA 6054

SA

2/7 Berger Road
Wingfield
SA 5013

	RLA Universal Pressure Sensitive Adhesive	RLA Carpet Tile PS Adhesive	RLA Carpet Adhesive	MS Timber Flooring Adhesive	X3 Adhesive	RLA Universal Resilient Flooring Adhesive	RLA 265	RLA 999	Vinyl Plank Adhesive	HT Vinyl Plank Adhesive	RL1000	RL6000
CARPET												
Synthetic Backed			✓			✓						
Hessian / Jute Backed			✓			✓						
Woven			✓			✓						
Underlay - Double Bond	✓		✓					✓				
Tiles	✓	✓						✓				
Indoor / Outdoor & Synthetic Grass			✓									✓
RESILIENT FLOORCOVERINGS												
Sheet Vinyl						✓	✓				✓	
Luxury Vinyl Plank / Tile									✓	✓	✓	
Linoleum						✓						
Rubber (up to 3mm)						✓					✓	
TIMBER												
Solid				✓	✓							
Engineered				✓	✓							
Parquetry				✓								



T. 1800 242 931

VIC

215 Colchester Rd
(PO Box 147)
Kilsyth VIC 3137

NSW

5A 246 Miller Road
Villawood
NSW 2163

QLD

1/91 Rudd Street
Oxley
QLD 4075

WA

24 Harwell Way
Bassendean
WA 6054

SA

Unit 2/7 Berger Rd,
Wingfield
SA 5013