

Domtar POS 57L - 2.6

Product Specifications

Caliper (mils/ µm)	Basis Weight	Brightness (UV Included)	Thermal Response - Nominal				Gurley Stiffness Nominal (mg)		Elmendorf Tear Nominal (g)		Parker Print Surf
			Static - (°C ± 5°)		Dynamic - Atlantek 400 (mJ/mm ²)		MD:	CD:	MD:	CD:	
			0.2 ODU	91	0.2 ODU	4.8					
2.6/66	17 x 22— 500 (lbs)	>85	0.2 ODU	91	0.2 ODU	4.8	42	20	37	43	<2.00
	15.0		1.0 ODU	132	1.0 ODU	9.2					
	g/m ²		Max. Density	1.26	Max. Density	1.53					
	56.5		Required Temp.	149	Energy Req.	16.0					

Features:

- Good for general imaging


Environmental Characteristics:

- Produced without the use of bisphenol A (BPA)

Ideal For:

- Economy point-of-sale for retail use
- Printer
- Facsimile
- Calculator
- Parking receipts
- ATM receipts
- Gas pump receipts

Dynamic Sensitivity

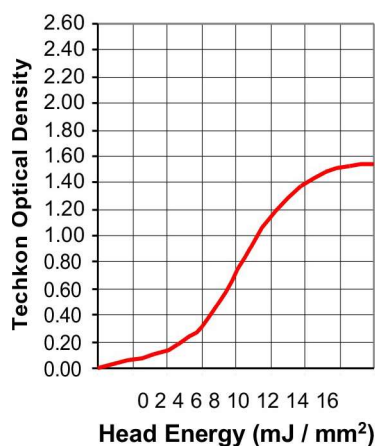

Static Sensitivity

