

The Synaptics SL-Series of embedded processors are highly integrated AI-native Linux® and Android™ systems on chip (SoCs) optimized for multi-modal consumer, enterprise, and industrial IoT workloads with hardware accelerators for edge inferencing, security, video, graphics, and audio. The SL1640 is a cost and power optimized secure SoC with high-performance compute engines including a quad-core Arm® Cortex®-A55, 1.6+ TOPS NPU, GE9920 GPU, Ultra HD video encode and decode pipelines, and dual DSP.

The SL1640 supports the Synaptics Astra™ platform, delivering a unified experience combining standards-based open software frameworks, full-featured AI toolkits, and Synaptics' best-in-class wireless connectivity portfolio.

BENEFITS


- ▶ Multi-modal IoT SoC for cost and power sensitive designs
- ▶ Heterogeneous accelerators enable out-of-the-box AI
- ▶ Pairs with best-in-class Synaptics wireless connectivity
- ▶ Enables fast time to market

APPLICATIONS


- ▶ Smart home appliances
- ▶ Enterprise conferencing
- ▶ Smart audio, displays, and signage
- ▶ Consumer and industrial control panels



PERFORMANCE /
WATT



HETEROGENEOUS
AI EDGE SOC

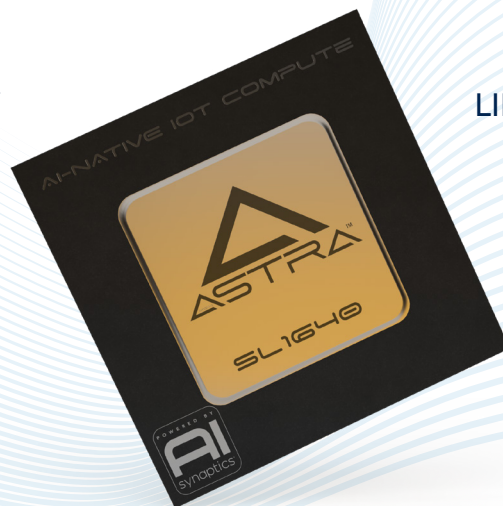

LINUX / ANDROID SDK




PROVEN SECURITY
MODEL



FEATURES

- ▶ Quad-core Arm® Cortex®-A55 processor with cryptographic extensions
- ▶ DRAM controller: 32/16-bit DDR4-3200 LPDDR4/LPDDR4x-3733
- ▶ Integrated GPU for 3D/2D graphics with concurrent execution and support for general-purpose compute
- ▶ 1.6+ TOPS NPU for edge inferencing
- ▶ Multi-standard video decoding with support for AV1, H.265/264 MVC, VP8, VP9, MPEG-2
- ▶ H.264 single 1080p30 8-bit encoding
- ▶ eMMC 5.1 controller
- ▶ Video, graphics post-processing and display pipeline with Synaptics QDEO®
- ▶ Audio processing with far-field voice, keyword detection, decompression and post-processing
- ▶ Base Crypto Module (BCM) security processor
- ▶ Memory scrambling and integrity checking
- ▶ True random number generator (TRNG)
- ▶ Physical attack mitigation
- ▶ On-chip 32 Kbit OTP
- ▶ Cadence® Tensilica® Dual HiFi 4 DSP
- ▶ System and power management unit
- ▶ Always-on (AON) domain for multi-protocol wake-up events
- ▶ Video, audio via MIPI DSI®, HDMI®-TX, I²S/TDM
- ▶ 10/100 networking, PCIe connectivity
- ▶ SPI, SDIO, UART, USB, GPIO, ADCs

SYSTEM BLOCK DIAGRAM

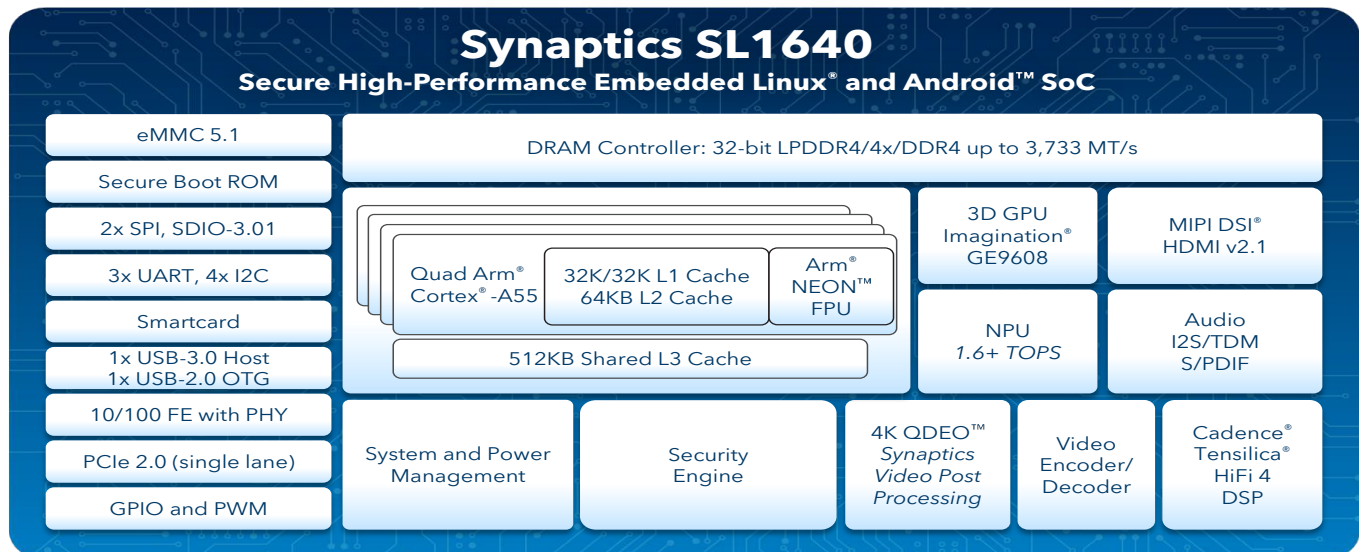

TRADEMARKS

Synaptics, Astra, [QDEO](#), and the Synaptics logo are trademarks or registered trademarks of Synaptics Incorporated or its affiliates in the United States and/or other countries.

All other marks are the property of their respective owners.

For more information, reference the [SL1640 Embedded IoT Processor Electrical Specification Datasheet](#) (PN: 505-001415-01).