

The Synaptics SL-Series of embedded processors are highly integrated AI-native Linux® and Android™ systems on chip (SoCs) optimized for multi-modal consumer, enterprise, and industrial IoT workloads with hardware accelerators for edge inferencing, security, video, graphics, and audio. The SL1680 incorporates high-performance compute engines, including a quad-core Arm® Cortex®-A73 64-bit CPU subsystem, a multi-TOPS NPU, a high-efficiency, feature-rich GPU for advanced graphics and AI acceleration, and multimedia accelerators for image signal processing (ISP), 4K video encode/decode, and audio.


The SL1680 is part of the family of Synaptics Astra™ SoCs, delivering a unified experience combining standards-based open software frameworks, full-featured AI toolkits, and Synaptics' best-in-class wireless connectivity portfolio.

BENEFITS

- ▶ Multi-modal IoT SoC lowers system cost
- ▶ Powerful NPU enables out-of-the-box AI
- ▶ Pairs with best-in-class Synaptics connectivity
- ▶ Enables fast time to market

APPLICATIONS


- ▶ Smart appliances
- ▶ Home security gateways
- ▶ Industrial control systems
- ▶ Signage and displays
- ▶ Point-of-sale systems
- ▶ Scanners



AI-NATIVE
EDGE SOC



HIGH
PERFORMANCE
PER WATT

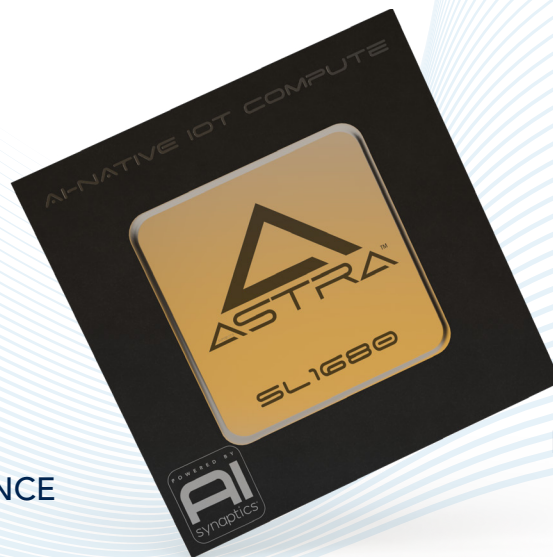

DUAL CAMERA
SUPPORT




PROVEN SECURITY
MODEL



FEATURES

- ▶ Quad-core Arm® Cortex®-A73 64-bit processor with security extensions
- ▶ DDR: 64/32-bit LPDDR4/LPDDR4x-3733 DRAM controller
- ▶ Integrated GPU for 3D/2D graphics with concurrent execution and support for general-purpose compute
- ▶ Up to 7.9+ TOPS NPU for edge inferencing
- ▶ Multi-standard video decoding with support for AV1, H.265/264 MVC, VP8, VP9, MPEG-2
- ▶ Multi-stream encoding for H.264, VP8 and simultaneous 2160p60 decode and 1080p60 encode
- ▶ Secure ISP engine
- ▶ Video, graphics post-processing, and display pipeline with Synaptics QDEO®
- ▶ Audio processing with far-field voice, keyword detection, decompression, and post-processing
- ▶ Base Crypto Module (BCM) security processor
- ▶ Memory scrambling and integrity checking
- ▶ True random number generator (TRNG)
- ▶ Physical attack mitigation
- ▶ On-chip 32 Kbit OTP
- ▶ System and power management unit
- ▶ Always-on (AON) domain for multi-protocol wake-up events
- ▶ eMMC 5.1 controller
- ▶ Video, audio via MIPI CSI-2®, MIPI DSI®, HDMI®, I²S/TDM
- ▶ Gbit networking, PCIe connectivity
- ▶ SPI, SDIO, UART, USB, GPIO, ADCs

SYSTEM BLOCK DIAGRAM

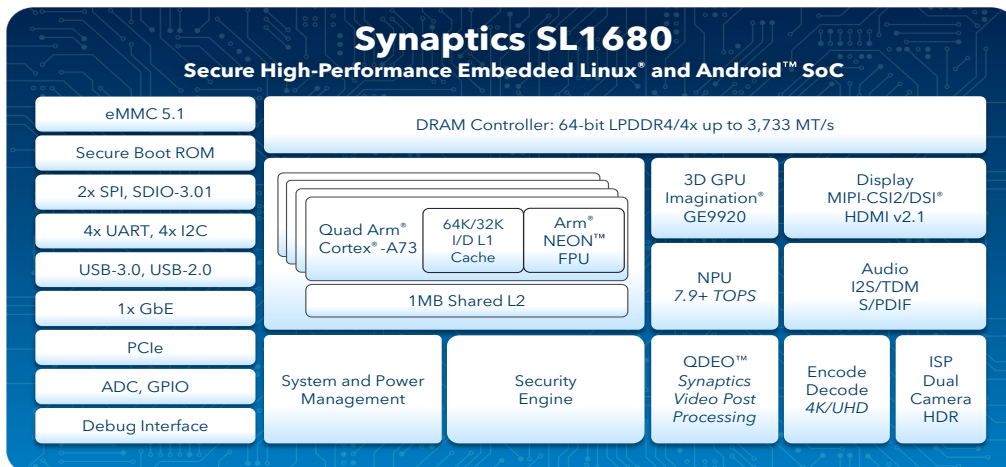

TRADEMARKS

Synaptics, Astra, [QDEO](#), and the Synaptics logo are trademarks or registered trademarks of Synaptics Incorporated or its affiliates in the United States and/or other countries.

All other marks are the property of their respective owners.

For more information, reference the [SL1680 Embedded IoT Processor Electrical Specification Datasheet](#) (PN: 505-001413-01).