



## S960


Tablet Arm Bracket  
(DGT204-W, DGT204-B)

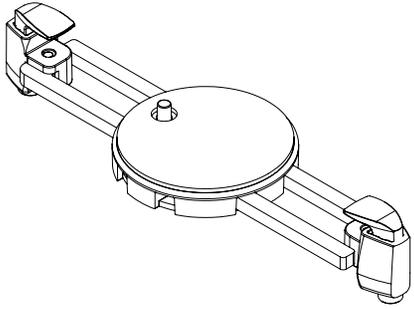


- 1 Wipe device with alcohol wipe. Let it dry completely.

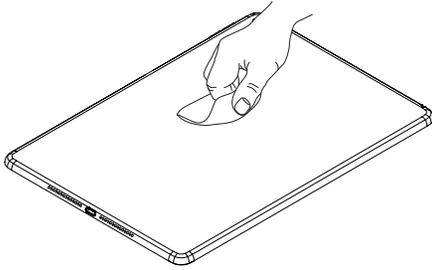


- 2 Use a Philips screwdriver to loosen screw on the mounting plate. **Do not remove screws.** Slide bracket arms outward.

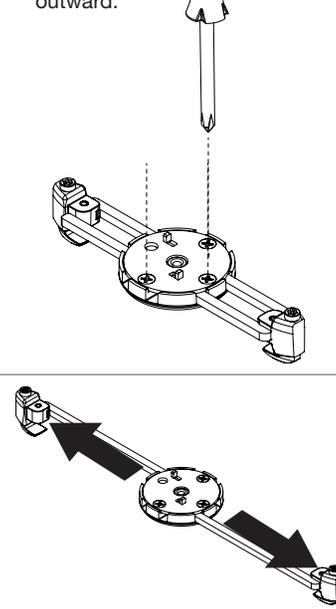


- 3 Use T20 bit to loosen the screws on the bracket hands.

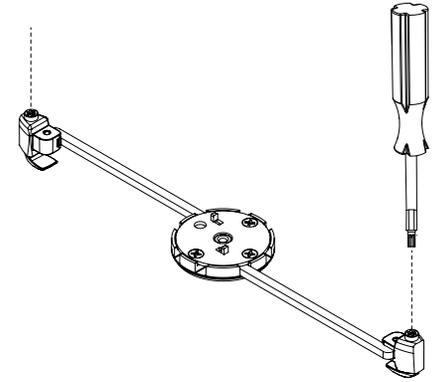


- 4 Remove clear film from the adhesive on the mounting plate.

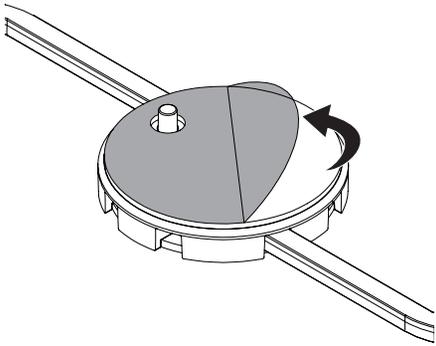


- 5 Place the mounting plate onto the back of the tablet in the center of the tablet **with the yellow plunger on the right** (bracket arms should be located on the left and right sides of the device). Confirm bracket arms do not interfere with any buttons on the sides of the device. Press mounting plate firmly against the tablet for at least 10 seconds.

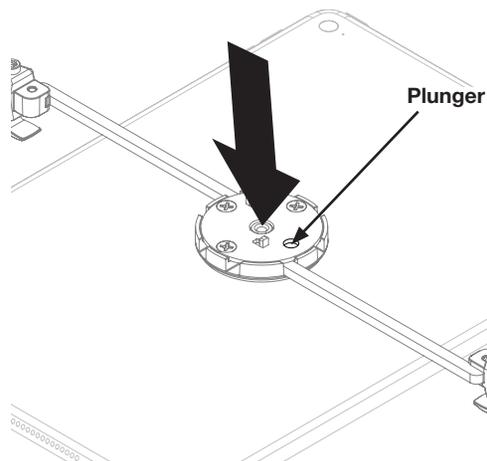


- 6 Slide bracket arms around the device. Use a Philips screwdriver to fully tighten screws on mounting plate.

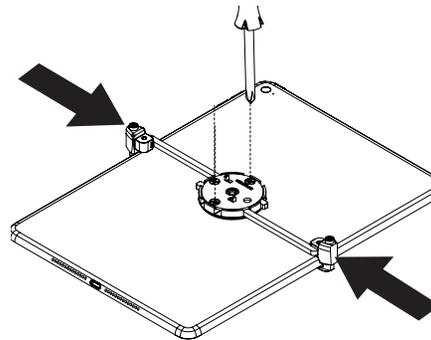


- 7 Use T20 bit to tighten screws on bracket arms. **Do not overtighten or damage may occur to the device.**

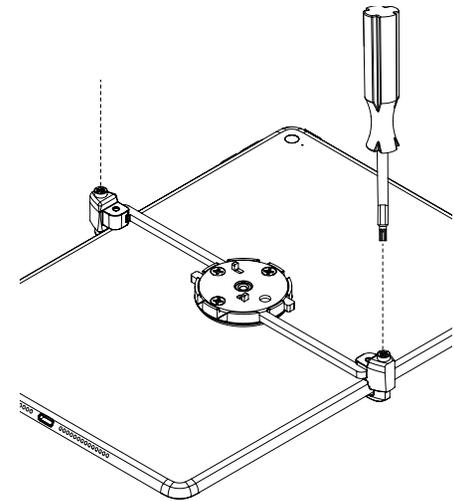


8 Use the mounting bracket screw to push the plug out from the sensor.

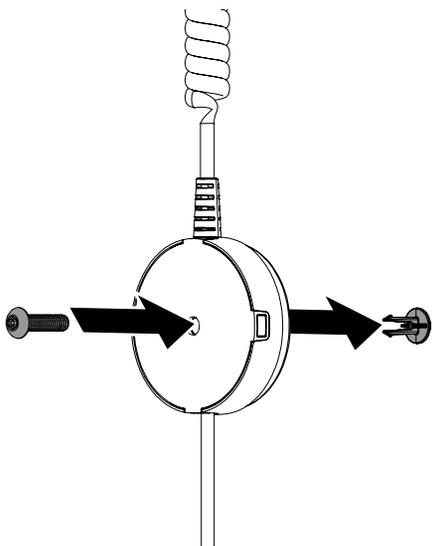


9 Use T20 bit to screw sensor to mounting plate using 1 provided screw.

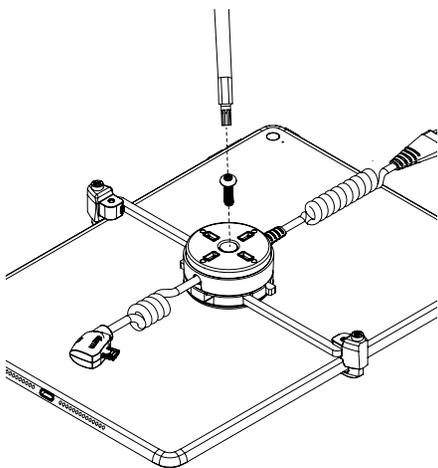


10 Plug power connector into device.

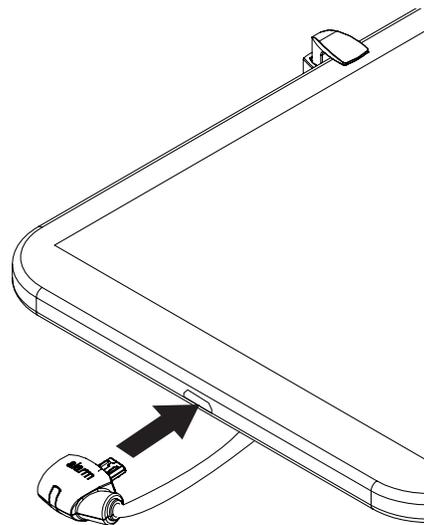

11 Plug sensor into stand.

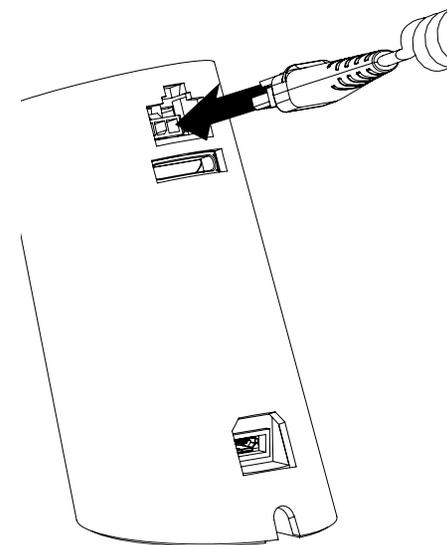

12 Place merchandise on stand. Final assembly should resemble image below.

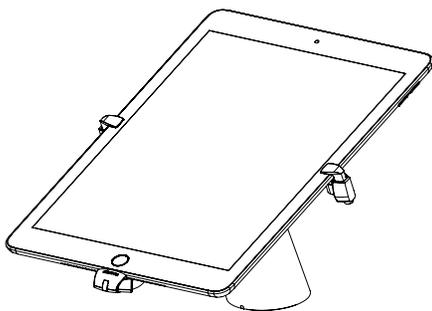

SD04011 Rev2 06/15/17

**invue**

[www.invue.com](http://www.invue.com)

NA / LATAM // 704.752.6513 • 888.55.INVUE

EMEA // +31.23.8900150

APAC // +852.3127.6811

© 2017 InVue Security Products Inc. All rights reserved.  
InVue is a registered trademark of InVue Security Products.