



Giant®

Enhancing everyday living

RESIDENTIAL ELECTRIC WATER HEATERS

POINT-OF-USE

| 2 | 5 | 10 | 16 | 22 | IMP. GALLONS

BENEFITS

1 - HIGH DENSITY FIBERGLASS INSULATION

Provides superior heat retention and efficiency while being environmentally friendly.

2 - FACTORY INSTALLED 3/4" NPT DI-ELECTRIC NIPPLES

Extend the life of the water heater by providing excellent corrosion protection.

3 - HIGH QUALITY MAGNESIUM ANODE

Provides excellent protection against the corrosive effects of water and extends tank life.

4 - ELECTRIC ELEMENTS

All models are equipped with CSA approved screw-in type immersion elements made by Giant. These elements can be easily replaced with no special tools, resulting in low maintenance costs.

5 - GLASS-LINED INNER TANK

A uniquely formulated blue cobalt glass enriched with zircon is fused to specially treated steel at 1,600°F (871°C) to provide the best coating available against corrosion for many years. The tank is certified at a test pressure of 300 PSI (2,068 kPa) and a working pressure of 150 PSI (1,035 kPa).

6 - AUTOMATIC TEMPERATURE CONTROL

Adjustable thermostat will provide years of reliable trouble-free service at the desired water temperature and a safety cut-off is provided for abnormal conditions.


7 - FACTORY INSTALLED TEMPERATURE AND PRESSURE-RELIEF VALVE†

Protects the tank from the damaging effects of excessive temperature and pressure.



†Supplied but not installed for 130E model.



103ETE Model

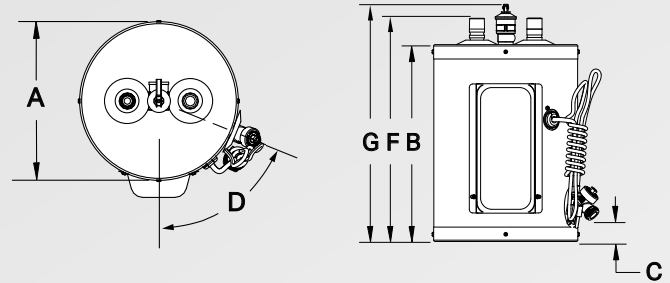

106SEO, 112SEO & 119SEO1 Models

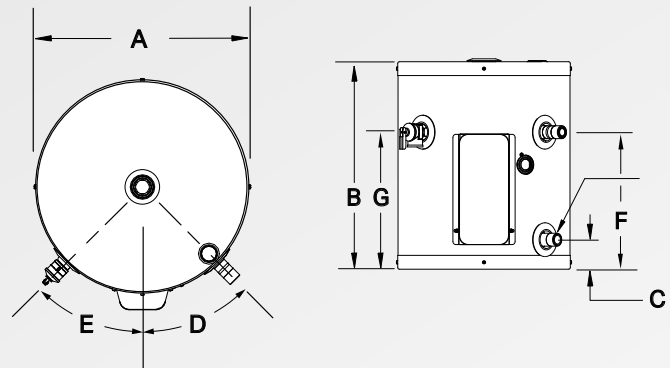

SPECIFICATIONS & DIMENSIONS

Models	Storage capacity			Factory installed wattages						Standby Loss	Diameter (A)		Height (B)		C	D	E	F	G	Estimated ship. weight				
				120V		208V		240V														Watts	inches	cm
	US gal.	Liters	IMP gal.	Watts	Amp.	Watts	Amp.	Watts	Amp.	Watts														
103ETE	2.5	10	2	1,500	12.50	-	-	-	-	-	10	(25)	13 3/4	(35)	2	(5)	68.4°	-	15 5/8	(40)	16 1/2	(42)	22	(10)
106SEO	6	23	5	1,500	12.50	2,250	10.8	3,000	12.50	-	14	(36)	16 7/8	(43)	2 5/8	(7)	45°	45°	11 3/8	(29)	10 1/8	(26)	35	(14)
112SEO	12	45	10	1,500	12.50	2,250	10.8	3,000	12.50	-	16	(41)	22 3/8	(57)	2 5/8	(7)	45°	45°	16 5/8	(42)	15 1/4	(39)	52	(24)
119SEO	19	72	16	1,500	12.50	2,250	10.8	3,000	12.50	54	18 1/4	(46)	26 1/2	(67)	2 5/8	(7)	45°	45°	20 5/8	(52)	19 3/8	(49)	65	(30)
130E†	26	100	22	1,500	12.50	2,250	10.8	3,000	12.50	56	18 1/4	(46)	42 1/2	(108)	2 1/4	(6)	58°	-	43 3/4	(111)	-	-	90	(41)

† Model not illustrated

WARRANTY

6 years

against inner tank leakage

1 year

on component parts

Giant offers a SIX (6)* year limited warranty against inner tank leakage from the date of installation ONE (1)* year limited warranty on component parts. For more specific warranty details including exceptions, consult the owner's manual that comes with each water heater.

*When installed by a professional.

Giant®

11021, Notre-Dame Street East, Montreal-East, Quebec, Canada, H1B 5H3

Telephone : 514-645-8893 • Toll free : 1-800-363-9354

General fax : 514-640-0969

Customer Service fax : 514-645-8413

giantinc.com