# ARCHES

## PATTERN - TCP (TEXTURE-CUT-PILE)

| | |
|---|---|
| Fiber Content | 100% PureColorTM SD BCF Polyester |
| Face Weight ozs/yd2 | 24 oz |
| Textured Cut Pile | 12 FT Width |
| Average Roll Size | 150' |
| Yarn/ Dye Method | Solution Dyed |
| Density | 1382 |
| Twist Level | 4.25 Turns Per Inch (Average) |
| Gauge | 3/16 |
| Tufts Per Inch | 7 |
| Pile Height | .625" (avg) |
| PAR Rating | 3.5 |
| Pattern Repeat | N/A |

### Maintenance

Recommended Cleaner: FreshFloors by WF Taylor

### Test

| | |
|---|---|
| Flammability | Pass |
| MEA # | 10500, 10522 |
| CRI Certification | Certified GLP9986 |

*All Specifications are subject to normal manufacturing tolerances*
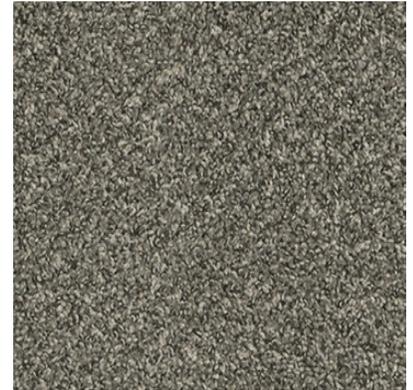
### Benefits

- Won't fade from prolonged exposure to harsh sunlight
- Won't bleach from spot cleaning
- Durable, stylish and affordable
- Resists staining when properly cared for including red wine and pet accidents

### Warranty

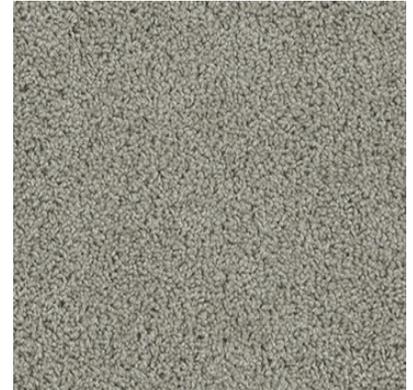| | |
|---|---|
| Stain Resistance: | Lifetime |
| Fade Resistance: | Lifetime |
| Pet Stains: | Lifetime |
| Abrasive Wear: | 15 Year |
| Manufacturing Defects: | 5 Year |
| Soil Resistance: | 15 Year |

**Broken Arch** | TAARCBRO

**Delicate Ash** | TAARCDEL

**Landscape Arch** | TAARCLAN

**Skyline Arch** | TAARCSKY

**Double Arch** | TAARCDOU

**Tower Arch** | TAARCTOW

### INSTALLATION FAST FACTS

- Follow CRI Carpet Installation Standards Guidelines
- Inspect new flooring prior to installation
- Clean up spills immediately
- Vacuum regularly and use walk-off mats at entrances

Read Complete Instructions Before Installing
**SPEC SHEET, WARRANTY INSTALLATION & MAINTENANCE**

MADE IN USA

100% SOLUTION DYED POLYESTER

CRI GREEN LABEL +PLUS

**TAS CONTRACT**

Additional specifications, full installation instructions & warranty information available online at **TASCONTRACT.COM**

*A division of* T&A supply company, Inc.