

Log-periodic antenna for Spectrum Compact




Compact, lightweight and reliable ultra-wideband log-periodic antenna 650MHz-6GHz has been designed to cover major 2G/3G/4G, 5G FR1, ISM, Wi-Fi frequencies. With using Spectrum Compact this antenna is suitable for indoor and outdoor testing. It comes with a SMA (F) connector, 20 mm compass and with handheld pistol miniature tripod.

Electrical and mechanical specifications

P/N	JOAA0606LP01
Frequency range, GHz	0.650-6.000
Peak Gain, dBi	13.7
Average Gain, dBi	8.3
VSWR typical	< 1:2.5
Nominal impedance	50 Ω
Dimensions, mm/inch	293 x 209 x 27/11.5 x 8.2 x 1
Net weight, g/oz	350/12.3
Connector	SMA (F)
Matching Spectrum Compact unit	JOSSAP31, JOSSAP33, JOSSAP55, JOSSAP10

Gain curve (typ.)

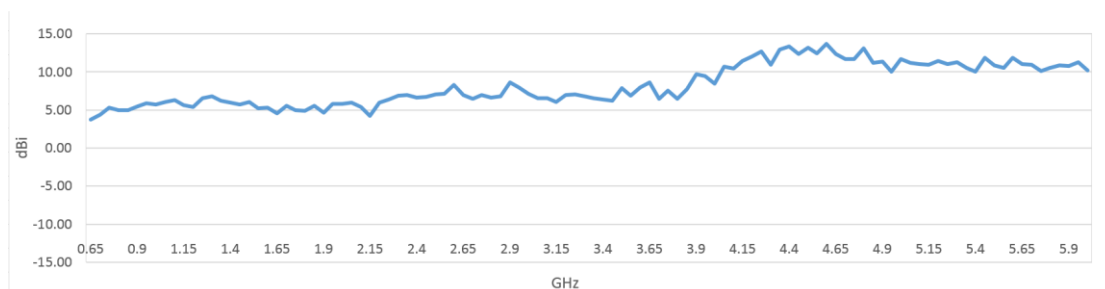

Log-periodic antenna for Spectrum Compact





Radiation patterns

Phi i=0

1 GHz



Phi i=90

1 GHz

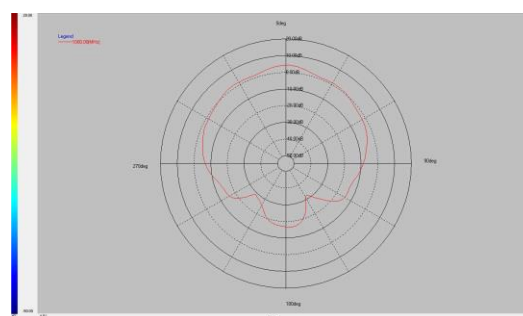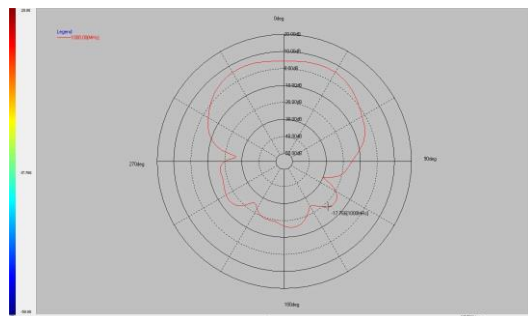



3 GHz

3 GHz

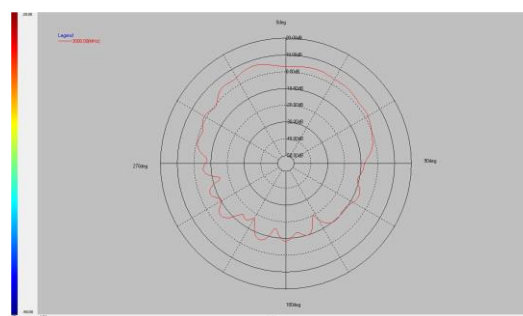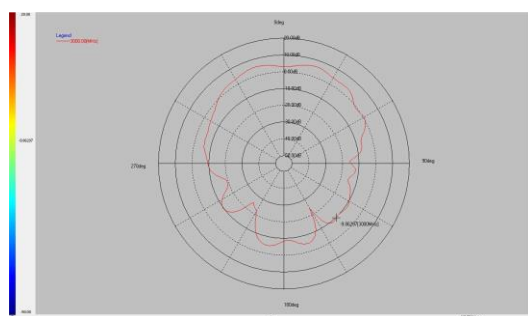



4 GHz

4 GHz

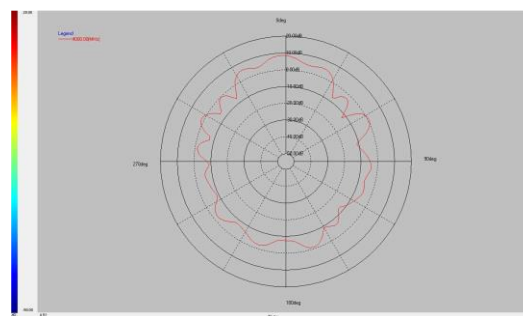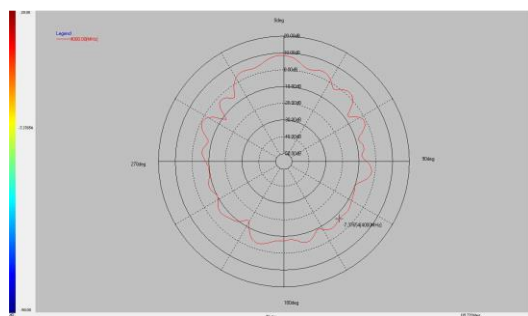

6 GHz

6 GHz

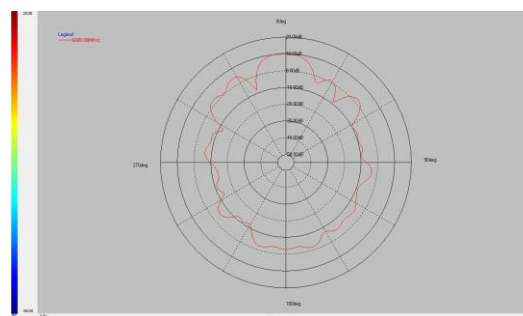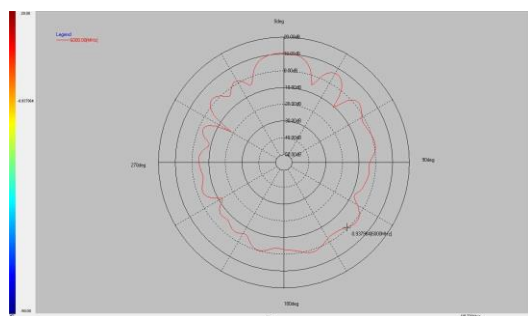

For more detailed information about SAF products visit www.saftehnika.com or contact your SAF representative info@saftehnika.com. Product features may vary between different models and configurations. They are subject to change without prior notice.

SAF Tehnika © 2023