



Unleash
SUPERIOR CUTTING POWER

Get ready to redefine your land management game with the extraordinary IronCraft 2400 Series Cutter - where performance, integrity, and aesthetics seamlessly unite for an unmatched cutting experience. It has an updated splitter box that seamlessly manages tip speed between 8' and 10', ensuring a consistent and controlled cut. The combination of counter rotation, 4" full uplift blades, adjustable tailwheel brackets, and increased deck skirt height is guaranteed to deliver remarkable cut quality through changing conditions.




Forging Ahead

NOTES:

Made in the U.S.A.
WITH U.S. & IMPORTED PARTS



IRONCRAFTUSA.COM | (423) 405-5150

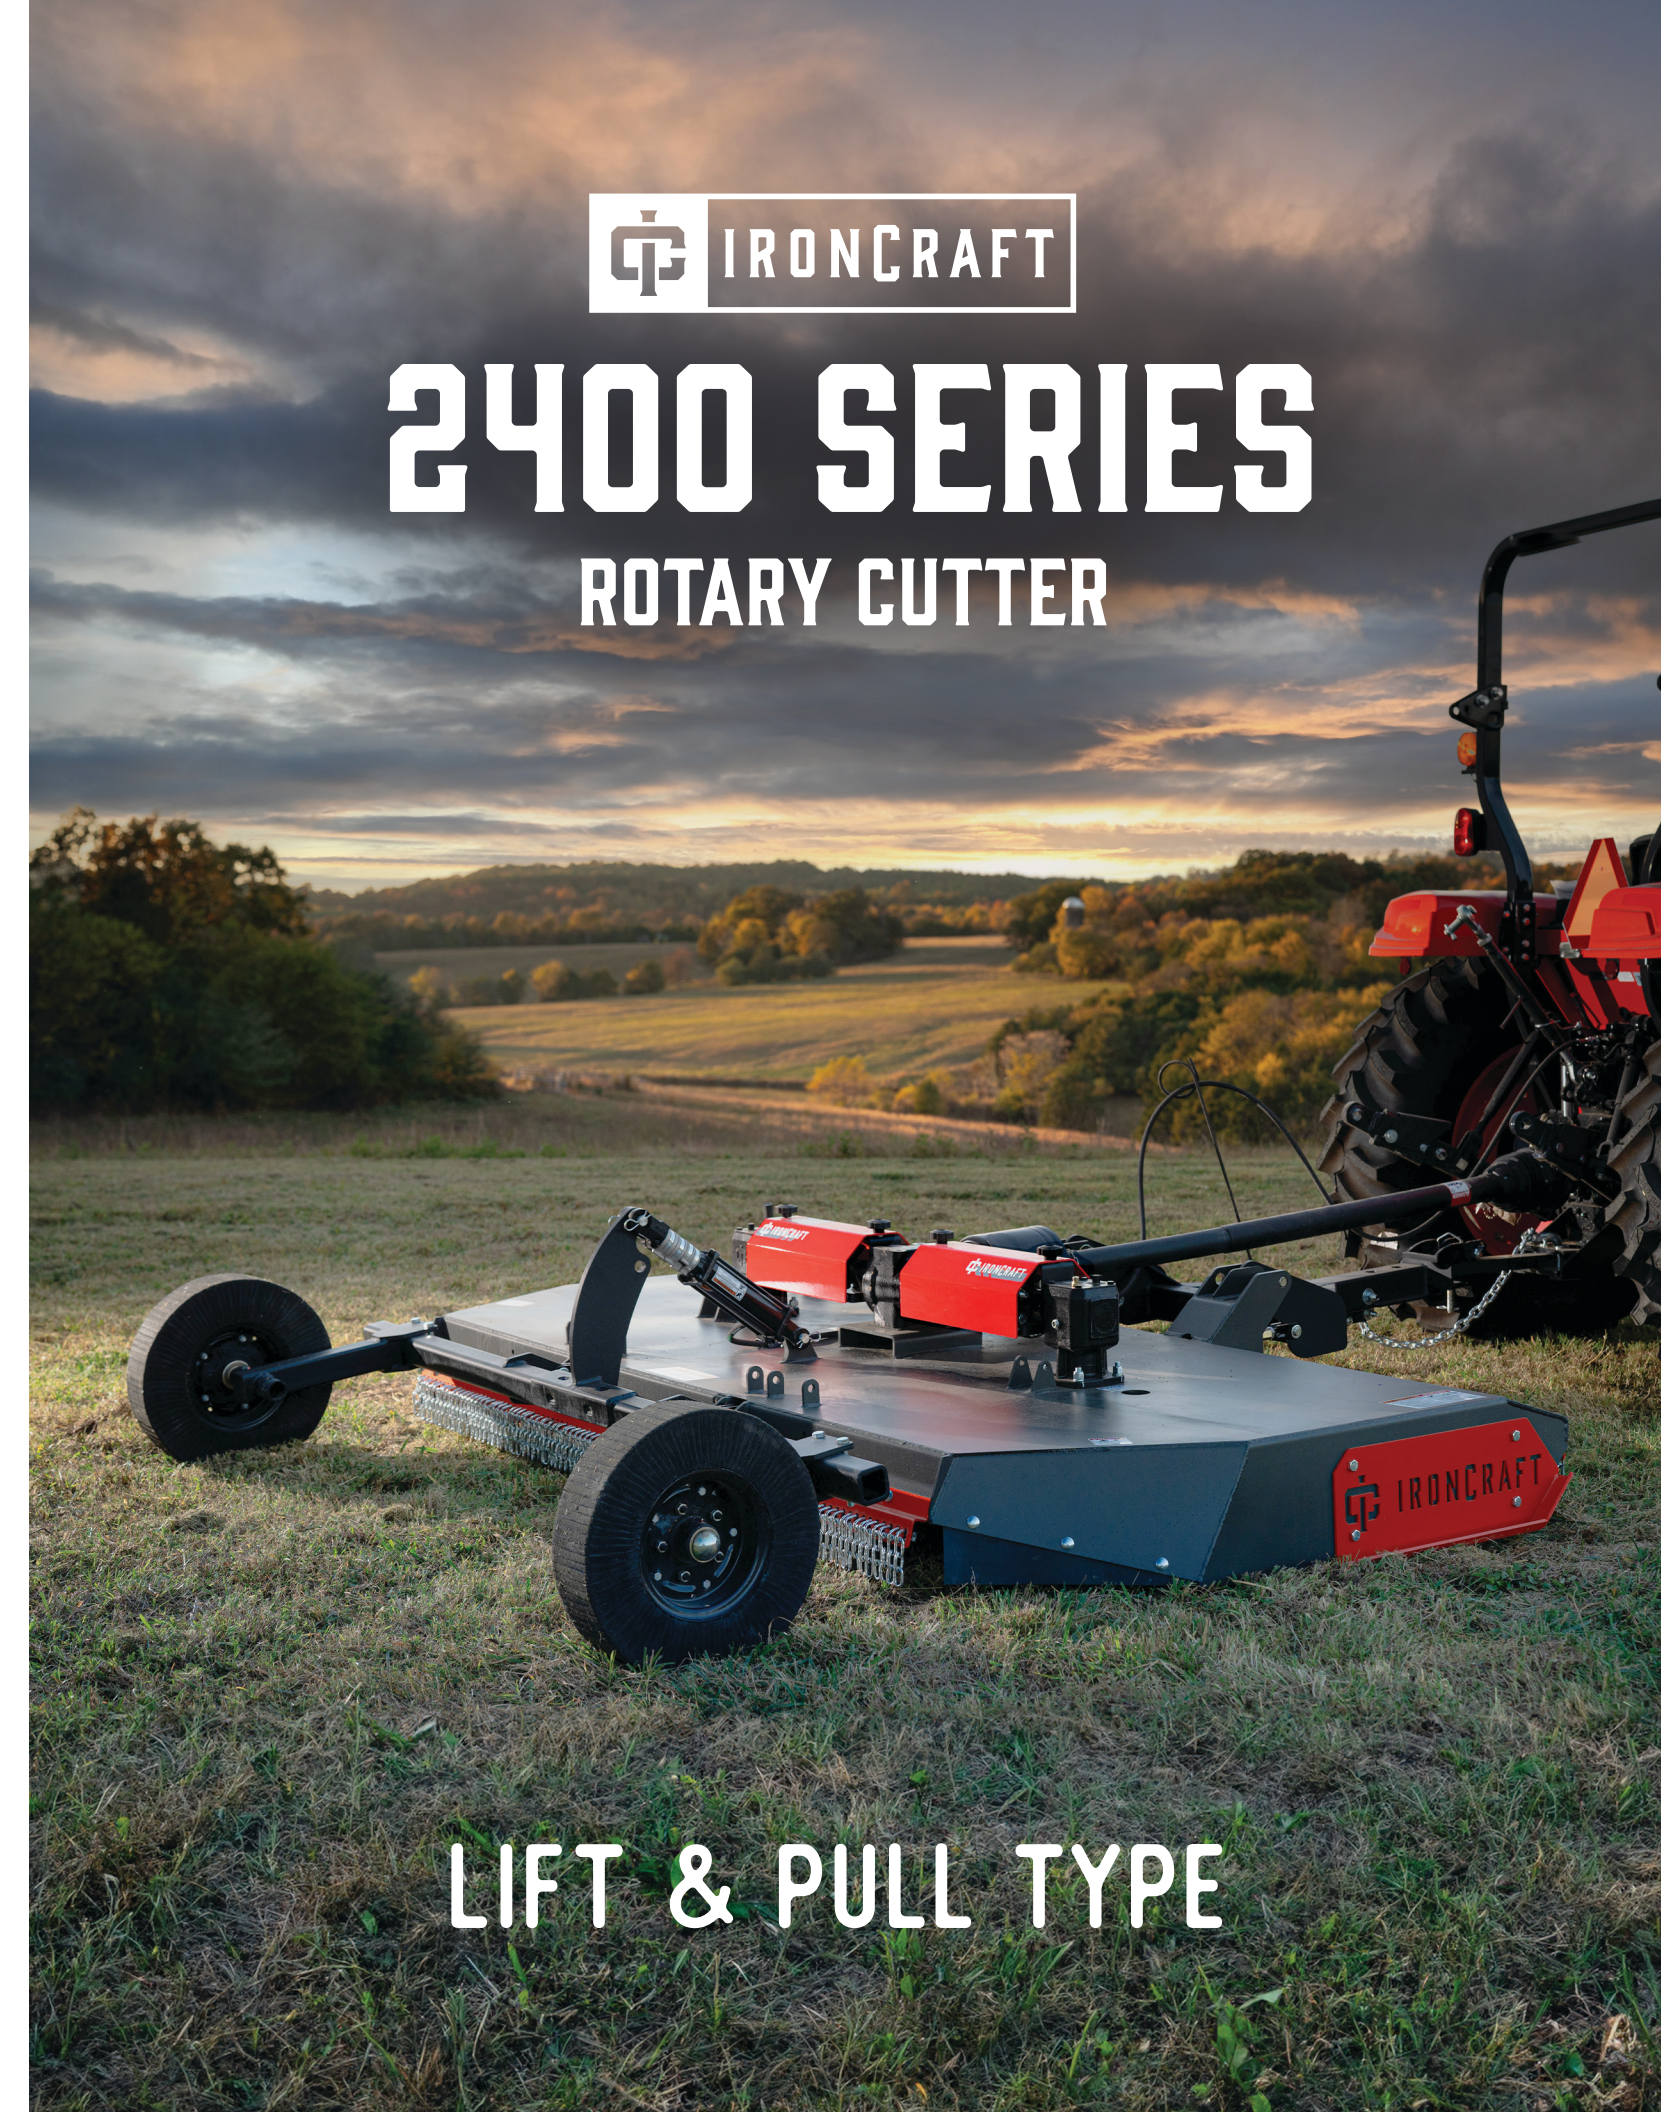

2400 SERIES
ROTARY CUTTER

LIFT & PULL TYPE

ROTARY CUTTER

2400 SERIES

Made in the U.S.A.
WITH U.S. & IMPORTED PARTS



PRODUCT HIGHLIGHTS

-  COUNTER ROTATING BLADES FOR EVEN MATERIAL SPREAD
-  INCREASED DECK HEIGHT FOR BETTER MATERIAL LIFT
-  REPLACEABLE, HEAVY-DUTY SKID SHOES

 RUGGED OUTBOARD GEARBOX

 4 INCH BLADE WIDTH FOR A CLEANER CUT

 ADJUSTABLE TAIL WHEEL SPACING

PULL-TYPE



AVAILABLE COLORS:



LIFT-TYPE



	2408	2410
DESCRIPTION	8' Heavy Duty Dual Spindle Cutter	10' Heavy Duty Dual Spindle Cutter
RPM	540	540
HP REQUIRED	42 Minimum PTO	52 Minimum PTO
WORKING WIDTH	96" (98" Transport Width)	120" (122" Transport Width)
WEIGHT	2408 - 1450 lbs. / 2408p - 1600 lbs.	2410 - 1585 lbs. / 2410p - 1680 lbs.
CUTTING HEIGHT	3-1/2" to 10"	3-1/2" to 10"
CUTTING CAPACITY	3"	3"
DECK THICKNESS	10 GA	10 GA
SIDE BANDS	11"	11"
SKID SHOES	Replaceable	Replaceable
PTO DRIVE SHAFT	Series 5 w/ Slip Clutch	Series 5 w/ Slip Clutch
CENTERED DRIVE SHAFT	Shock Coupler Protected	Shock Coupler Protected
BLADE HOLDER	3/16" Formed Plate w/ 3/4" x 2" Blade Bar	3/16" Formed Plate w/ 3/4" x 2" Blade Bar
GEARBOX RATING	125 HP	125 HP
OUTBOARD GEARBOX RATING	75 HP	75 HP
WHEEL TYPE	Laminated	Laminated
HUB TYPE	Bearing	Bearing
HITCH	Cat 1 & 2 (Hitch Type: Lift or Pull)	Cat 2 (Hitch Type: Lift or Pull)
GEARBOX WARRANTY	5 Year	5 Year
GUARDING OPTIONS	Chains	Chains
BLAD TIP SPEED	16700 FPM	17300 FPM



IRONCRAFT

2400 SERIES

(423) 405-5150

IRONCRAFTUSA.COM



WATCH IT IN ACTION