

HVAC DUCTWORK PENETRATIONS

FyreFlange® HVAC Firestop Gasket

The FyreFlange® HVAC Firestop Gasket makes firestopping ductwork easy. The factory-metered intumescent gasket seals against fire and smoke while preventing deflection of the duct during fire exposure. The red color is easy to identify and inspect.

FyreFlange® HVAC Firestop Gasket is an intumescent gasket that pairs with minimum 20 gauge (0.04 in or 1 mm) 2" x 2" steel retaining angle. Convenient 150' (45.7 m) rolls allow the user to cut what is needed and minimize waste. Corner clips are available to provide structural support for ductwork exceeding 24" x 48".

Features & Benefits

Meets ASTM E814 (UL1479) and CAN/ULC-S115


One step installation

• Economical – saves labor

· No additional firestop or packing materials required

· Eliminates the need for multiple inspections

· Can be installed over or under duct insulation

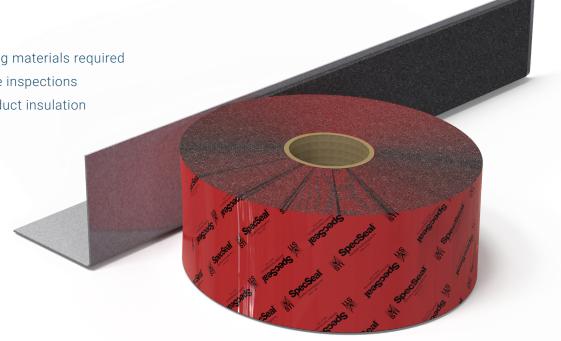

		ORDERING INFORMATION			
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
FFG100	730573302217	FyreFlange® HVAC Firestop Gasket (150' Roll)	1	1 Roll	10.85 lbs. (4.93 kg)
		ORDERING INFORMATION - ACCES	SORIES		
Catalog Number	UPC Number	Description	(UOM) Qty.	Case Qty.	Weight (Each)
FFC22	730573300220	FyreFlange® Corner Angle Pack – 8 per pack	1	1 Bag	0.89 lbs (0.40 kg)





TEST STANDARDS: ASTM E814 (UL 1479), CAN/ULC-S115







