
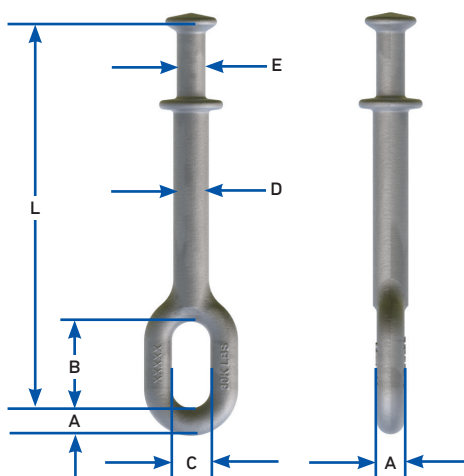


BALL EYE HOT LINE LINK


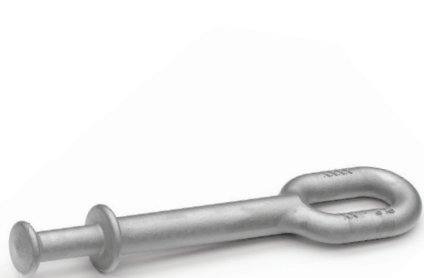


Component	Material
Body	Forged Steel, Hot Dip Galvanized

Catalog Number	General Dimensions						For Use with Insulators per ANSI Class Spec. C-29.2-71	Vertical Ultimate Strength lbf (kN)
	in (mm)							
	A	B	C	D	E	L		
BEL-30-L	11/16 (17.5)	2-1/8 (53.9)	15/16 (24)	7/8 (22.4)	23/32 (18)	TBD	52-3 and 52-5	30,000 (133)
BEL-50-L	15/16 (23.9)	2-1/2 (63.4)	1-1/8 (28.5)	31/32 (24.9)	7/8 (22.6)	TBD	52-8 and 52-11	50,000 (222)

L = Length in inches. Example L = 18, BEL-30-18.

EYE-EYE HOT LINE LINK

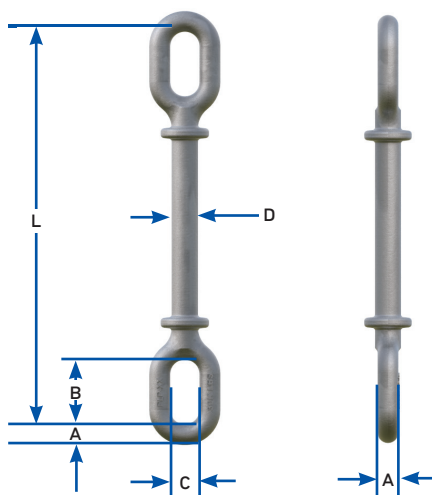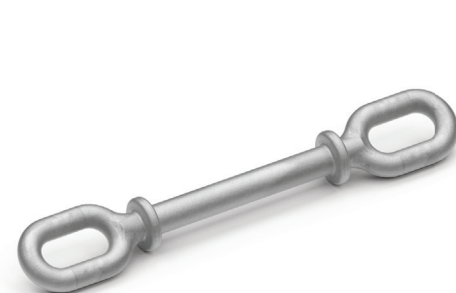

Component	Material
Body	Forged Steel, Hot Dip Galvanized

Catalog Number	General Dimensions					Vertical Ultimate Strength
	in (mm)					
	A	B	C	D	L	lbf (kN)
EEL-30-L	11/16 (17.5)	2-1/8 (53.9)	15/16 (23.8)	7/8 (22.4)	TBD	30,000 (133)
EEL-40-L	13/16 (20.6)	2-5/16 (58.7)	1-1/32 (26.2)	13/16 (23.4)	TBD	40,000 (178)
EEL-50-L	15/16 (23.9)	2-1/2 (63.4)	1-1/8 (28.5)	31/32 (24.9)	TBD	50,000 (222)
EEL-80-L	15/16 (23.9)	2-1/2 (63.4)	1-1/8 (28.5)	1-1/8 (28.6)	TBD	80,000 (356)

For 90 degree eye rotation, include a "-90" at the end of the part number. Ex. EEL-50-24-90", *L = Length in inches.

Example L = 18, EEL-30-18.