



EYE EYE TURNBUCKLE

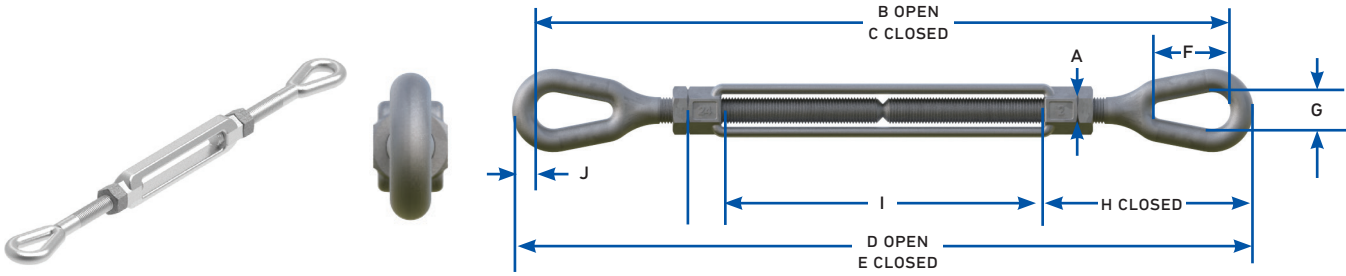

Catalog Number	Size	WLL	Rated Breaking Strength	Weight	Dimensions				
					in (mm)				
	in (mm)	lb (kN)	lb (kN)	lb (kg)	A	B	C	D	E
TB-EE-34-6	3/4 x 6 (19.1 x 152)	5,200 (23.1)	26,000 (116)	3.89 (1.76)	3/4 (19.1)	22-3/8 (568)	16-3/8 (416)	23-5/8 (600)	17-5/8 (448)
TB-EE-34-9	3/4 x 9 (19.1 x 229)	5,200 (23.1)	26,000 (116)	4.61 (2.09)	3/4 (19.1)	28-3/8 (721)	19-3/8 (492)	29-5/8 (752)	20-5/8 (524)
TB-EE-34-12	3/4 x 12 (19.1 x 305)	5,200 (23.1)	26,000 (116)	5.43 (2.46)	3/4 (19.1)	34-3/8 (873)	22-3/8 (568)	35-5/8 (905)	23-5/8 (600)
TB-EE-34-18	3/4 x 18 (19.1 x 457)	5,200 (23.1)	26,000 (116)	7.25 (3.29)	3/4 (19.1)	46-3/8 (1,178)	28-3/8 (721)	47-5/8 (1,210)	29-5/8 (725)
TB-EE-78-12	7/8 x 12 (22.4 x 229)	7,200 (32)	36,000 (160)	8.10 (3.67)	7/8 (22.4)	35-5/16 (897)	23-3/8 (568)	36-13/16 (935)	24-13/16 (630)
TB-EE-78-18	7/8 x 18 (22.4 x 305)	7,200 (32)	36,000 (160)	9.95 (4.51)	7/8 (22.4)	47-5/16 (1,202)	29-5/16 (745)	48-13/16 (1,240)	30-13/16 (783)
TB-EE-1-6	1 x 6 (25.4 x 152)	10,000 (44.5)	50,000 (222)	9.33 (4.23)	1 (25.4)	26 (660)	20 (507)	27-3/4 (704)	21-3/4 (552)
TB-EE-1-12	1 x 12 (25.4 x 229)	10,000 (44.5)	50,000 (222)	11.93 (5.41)	1 (25.4)	38 (964)	25 (660)	40 (1,015)	27-3/4 (704)
TB-EE-1-18	1 x 18 (25.4 x 305)	10,000 (44.5)	50,000 (222)	14 (6.35)	1 (25.4)	50 (1,269)	32 (812)	51-3/4 (1,314)	33-3/4 (856)
TB-EE-1-24	1 x 24 (25.4 x 610)	10,000 (44.5)	50,000 (222)	17.25 (7.82)	1 (25.4)	62 (1,575)	38 (964)	63-3/4 (1,618)	39-3/4 (1,009)

EYE EYE TURNBUCKLE CONTINUED

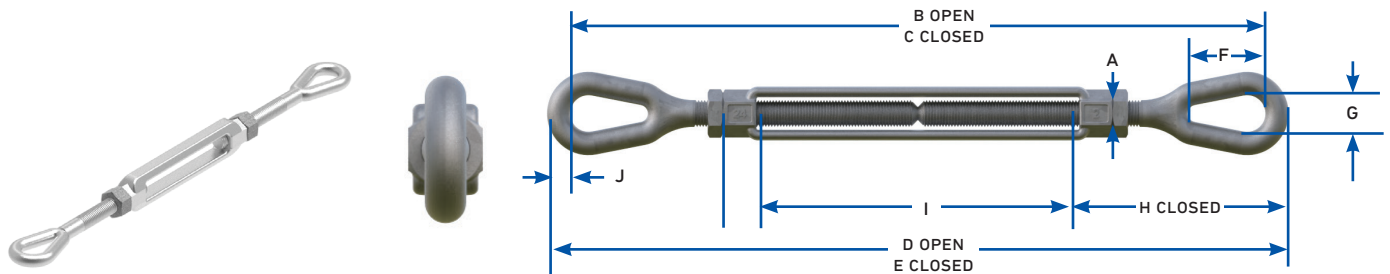

Catalog Number	Dimensions				
	in (mm)				
	F	G	H	I	J
TB-EE-34-6	2-1/16 (53.1)	1 (25.4)	4-11/16 (119)	6 (152)	9/16 (15.5)
TB-EE-34-9	2-1/16 (53.1)	1 (25.4)	4-11/16 (119)	9 (229)	9/16 (15.5)
TB-EE-34-12	2-1/16 (53.1)	1 (25.4)	4-11/16 (119)	12 (305)	9/16 (15.5)
TB-EE-34-18	2-1/16 (53.1)	1 (25.4)	4-11/16 (119)	18 (457)	9/16 (15.5)
TB-EE-78-12	2-3/8 (60.5)	1-1/4 (31.8)	5-1/8 (130)	12 (305)	3/4 (19.8)
TB-EE-78-18	2-3/8 (60.5)	1-1/4 (31.8)	5-1/8 (130)	18 (457)	3/4 (19.8)
TB-EE-1-6	3 (76.2)	1-7/16 (36.6)	6-3/8 (162)	6 (152)	7/8 (22.4)
TB-EE-1-12	3 (76.2)	1-7/16 (36.6)	6-3/8 (162)	12 (305)	7/8 (22.4)
TB-EE-1-18	3 (76.2)	1-7/16 (36.6)	6-3/8 (162)	18 (457)	7/8 (22.4)
TB-EE-1-24	3 (76.2)	1-7/16 (36.6)	6-3/8 (162)	24 (610)	7/8 (22.4)