


Y-CLEVIS EYE FOR SUSPENSIONS (90 DEGREE)

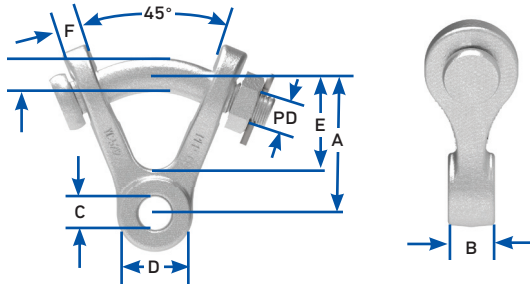


Component	Material
Body	Ductile Iron, Hot Dip Galvanized
Hardware	Galvanized Steel
Cotter Pin	Stainless Steel

Catalog Number	General Dimensions							Vertical Ultimate Strength	Weight
	in (mm)								
	A	B	C	D	E	F	PD	lbf (kN)	lb (kg)
YC-5206	2-31/32 (75.4)	5/8 (15.9)	11/16 (18)	1-5/8 (41.3)	2-5/32 (55)	19/32 (15)	3/4 (19)	15,000 (67)	1.7 (0.77)
YC-5207	2-15/16 (74.8)	3/4 (19)	11/16 (18)	1-5/8 (41.3)	2-1/8 (54)	19/32 (15)	3/4 (19)	20,000 (84)	1.7 (0.77)
YC-5209	2-31/32 (75.4)	1-1/16 (26.9)	13/16 (20.6)	1-5/8 (41.3)	2-1/32 (51.6)	19/32 (15)	3/4 (19)	25,000 (111)	1.7 (0.78)
YC-5211	2-31/32 (75.4)	2-1/8 (54.0)	13/16 (20.6)	1-5/8 (41.3)	2-1/32 (51.6)	19/32 (15)	3/4 (19)	25,000 (111)	2.0 (0.88)
YC-5212	2-31/32 (75.4)	1 (25.4)	11/16 (17.5)	1-5/8 (41.3)	2-1/32 (51.6)	19/32 (15)	3/4 (19)	25,000 (111)	1.8 (0.81)
YCE-50	3-1/32 (77.2)	1-1/8 (28.6)	13/16 (20.6)	2 (50.8)	2-1/32 (51.6)	3/4 (19)	7/8 (22)	50,000 (222)	2.6 (1.17)
YC-9030	2-13/16 (71.4)	5/8 (15.9)	11/16 (18)	1-5/8 (41.3)	2 (50.8)	19/32 (15)	3/4 (19)	15,000 (67)	1.2 (0.56)
YC-9031	2-13/16 (71.4)	3/4 (19.1)	11/16 (18)	1-11/16 (42.9)	2 (50.8)	19/32 (15)	3/4 (19)	25,000 (111)	1.3 (0.60)
YC-9032	2-13/16 (71.4)	1-1/4 (31.8)	11/16 (18)	1-11/16 (42.9)	2 (50.8)	19/32 (15)	3/4 (19)	25,000 (111)	1.5 (0.70)
YC-9033	2-13/16 (71.4)	1-3/4 (44.5)	11/16 (18)	1-11/16 (42.9)	2 (50.8)	19/32 (15)	3/4 (19)	25,000 (111)	1.7(0.80)
YC-9034 ¹	3-3/32 (78.6)	2-1/4 (57.2)	11/16 (18)	1-11/16 (42.9)	2-5/32 (55)	19/32 (15)	3/4 (19)	30,000 (133)	2.3 (1.0)
YC-6106 ¹	2-31/32 (75.4)	2-1/4 (57.2)	13/16 (20.6)	1-5/8 (41.3)	2 (50.8)	19/32 (15)	3/4 (19)	30,000 (133)	1.7 (0.75)
YC-6107 ¹	2-31/32 (75.4)	1 (25.4)	11/16 (17.5)	1-5/8 (41.3)	2 (50.8)	19/32 (15)	3/4 (19)	30,000 (133)	1.4 (0.62)
YC-6108 ¹	2-5/32 (55)	2-3/4 (69.9)	13/16 (20.6)	1-13/16 (46)	2-5/32 (55)	19/32 (15)	3/4 (19)	30,000 (133)	2.6 (1.18)

¹ Body is forged steel.

Y-CLEVIS EYE

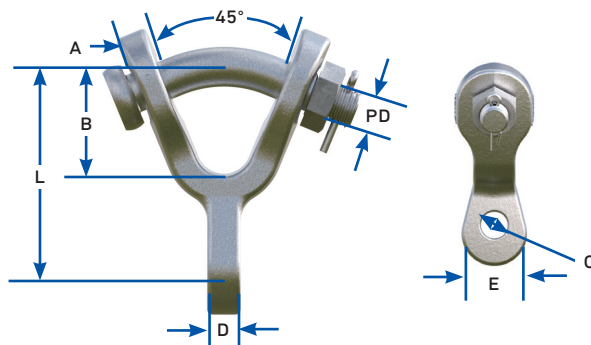

Component	Materials
Body	Ductile Iron, Hot Dip Galvanized
Hardware	Galvanized Steel
Cotter Pin	Stainless Steel

Catalog Number	General Dimensions							Vertical Ultimate Strength	Weight
	in (mm)								
	A	B	C	D	E	L	PD	lbf (kN)	lb (kg)
YCE-30	19/32 (15)	1-3/4 (44.5)	11/16 (17.5)	5/8 (15.9)	1-11/16 (42.8)	3-5/32 (80)	3/4 (19)	30,000 (133)	1.90 (0.86)

For bolt, nut, and cotter in place of clevis pin, add BNK to the catalog number (Ex: YCE-30BNK).