


VERTICAL BUNDLING LINK FOR CGS

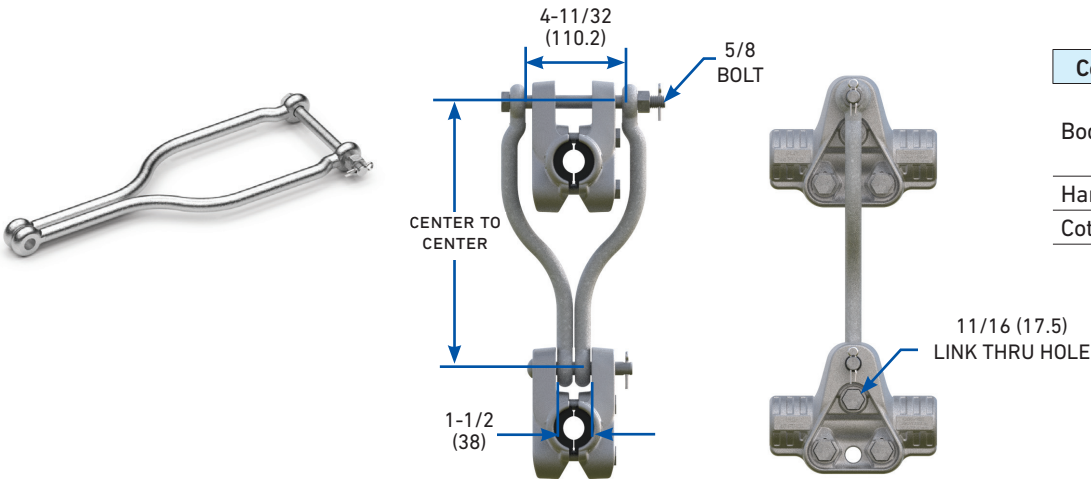


Component	Material
Body	Forged Steel, Hot Dip Galvanized
Hardware	Galvanized Steel
Cotter Pin	Stainless Steel

Catalog Number	CGS Range	Center to Center	Vertical Ultimate Strength	Weight
		in (mm)	lbf (kN)	lb (kg)
VBLMS11244	All Sizes	12 (305)	30,000 (133)	6.2 (2.8)
VBLMS11302	All Sizes	18 (457)	40,000 (222)	7.5 (3.4)

Each assembly consists of two links, one bolt for top CGS, one lock washer and one locknut.

VERTICAL BUNDLING LINK FOR AGS

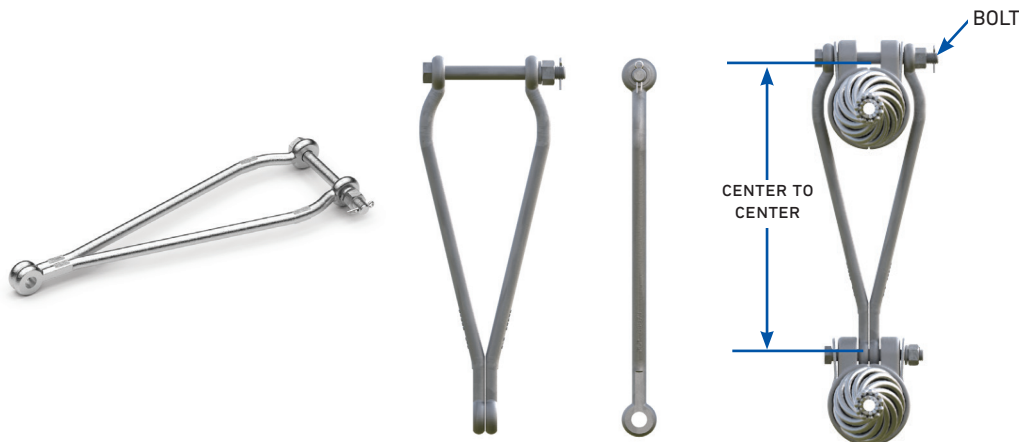

Component	Material
Body	Forged Steel, Hot Dip Galvanized
Hardware	Galvanized Steel
Cotter Pin	Stainless Steel

Catalog Number	General Dimensions				Weight
	in (mm)				
	AGS Range	Rod Diameter	Bolt Diameter	Center to Center	lb (kg)
VBL-04	.751 - .907 (19.0 - 23.0)	5/8 (15.8)	5/8 (15.8)	18 (457)	3.5 (1.6)
VBL-05	.908 - 1.005 (23.0 - 25.5)	5/8 (15.8)	5/8 (15.8)	18 (457)	3.9 (1.8)
VBL-06	1.006 - 1.208 (25.5 - 30.6)	5/8 (15.8)	5/8 (15.8)	18 (457)	3.9 (1.8)
VBL-07	1.209 - 1.355 (30.6 - 34.4)	3/4 (19.0)	3/4 (19.0)	18 (457)	5.3 (2.4)
VBL-08	1.356 - 1.557 (34.4 - 39.54)	3/4 (19.0)	3/4 (19.0)	18 (457)	5.4 (2.4)
VBL-09	1.558 - 1.882 (39.54 - 47.80)	3/4 (19.0)	3/4 (19.0)	18 (457)	5.4 (2.4)
VBL-10	1.883 - 2.233 (47.80 - 56.71)	3/4 (19.0)	3/4 (19.0)	18 (457)	5.4 (2.4)

Also available in 12" (304 mm) vertical spacing. Add -12 to catalog number (Ex: VBL-06-12).

Each assembly consists of two links, one bolt for top AGS, one lock washer and one locknut.