PROVINCIAL ESTATE

PACIFIC MAT & FLOORING

SPC | 6.0 MM, 20 MIL

Construction	SPC Rigid Core, Stone Polymer Composite.
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	7" Wide x 60" Long
Overall Thickness	6.0 mm (Includes 1 mm IXPE pad)
Attached Pad	1 mm IXPE Pad
Wear Layer	20 mil
Finish Coat	Adamantine Finish™ Low Gloss Matte
Texture	Embossed-In-Register
Edge Profile	4-Sided Painted Bevel
Packaging	23.62 sf/ctn, 8 pcs/ctn, 50.5 lbs/ctn, 45 ctn/plt, 1062.9 sf/plt

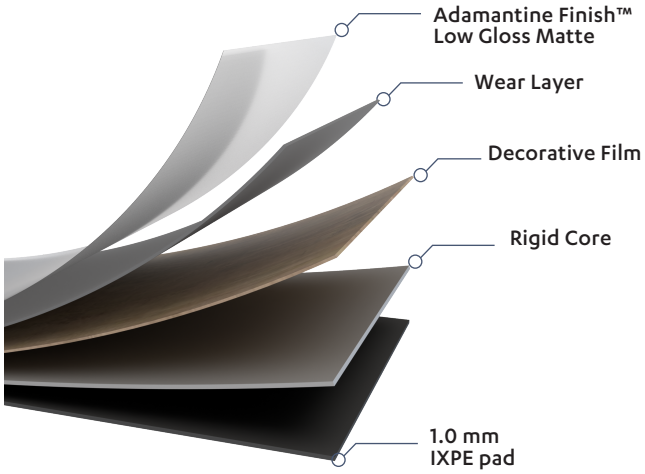

Installation & Maintenance

Angle/Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces. Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Neutral PH Cleaner.

Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

QNose Stair Nosing

Layout Options:

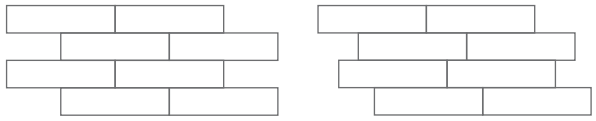

ASHLAR STAGGER

Health & Environmental

FloorScore® program by SCS Global Services
Phthalate-Free
Adamantine Protection

Additional specifications, full installation instructions & warranty information available online at **PACMAT.COM**