

# TANDEM PREMIUM



WPC | 8.0 MM, 20 MIL

Construction	Engineered WPC Vinyl Click
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long (224 mm x 1518 mm)
Overall Thickness	8.0 mm (Includes 1.5 mm Pad)
Attached Pad	1.5 mm Premium Pad
Wear Layer	20 mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed-In-Register
Edge Profile	Pressed Bevel
Packaging	29.307 sf/ctn, 8 pcs/ctn, 50.7 lbs/ctn, 52 ctn/plt, 1524 sf/plt

## Installation & Maintenance

Angle / Angle

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.  
Transition Required for rooms Larger than: (50) L x (50) W

Ambient & Surface: Acclimate product to environment.

Work out of multiple boxes. Subfloors dry and flat (3/16" in 10')

Hydroponic Radiant Heat Systems only

Maintenance: No Polish, Fresh Floors by TAS Flooring

## Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

## Health & Environmental

FloorScore® program by SCS Global Services

Phthalate Free

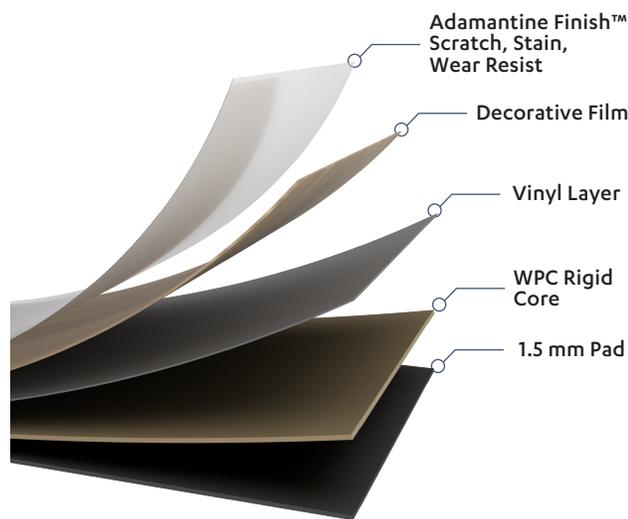

## Warranty

10 Year Light Commercial, 30 Year Residential


## Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round  
[QNose](#) Stair Nosing

## Layout Options:



ASHLAR



STAGGER