VIKING PUMP[®]



GB-414 SERIES™

GENERATION 3 REBUILDABLE PIPELINE INJECTION PUMP

FEATURES & BENEFITS

DIMENSIONALLY INTERCHANGEABLE WITH NORTHERN® 4900 SERIES

- Pump dimensions match existing motor, base & piping
- Dual ports eliminate costly piping modifications
- Spare pumps available in stock for immediate shipment on a first-come-first-serve basis

SIMPLE. FIELD-REBUILDABLE DESIGN

- Simple disassembly and reassembly process saves time and money
- Rebuild where and when you need it
- Complete rebuild kit brings the pump back to as-new operating condition

RELIABLE SEALING SOLUTION

- Type 2 bellows seal with standard 200 PSI inlet rating reduces the leak risk and expense of multiple seals per pump
- Robust axial thrust control bearing reduces premature seal failure due to elevated inlet pressure, starts, stops, and other difficult application conditions

MODULAR PORT DESIGN

Standard 180° SAE or 2" NPT ports fit into existing piping location of competitive gear pumps

COMPACT FOOTPRINT


- 7' unit length on largest pump and motor assembly
- Motor speed operation eliminates the need for gear reducers or belt drives
- Units include small, rigid formed steel baseplate complete with spacer coupling and coupling guard

PERFORMANCE


		Port Size & Type*	Nominal Flow @ 200 PSI (1,775 rpm) on 4 cP		Nominal Flow @ 400 PSI (1,775 rpm) on 4 cP		Nominal Flow @ 600 PSI (1,775 rpm) on 4 cP		Nominal Flow @ 750 or 800 PSI (1,775 rpm) on 4 cP		Nominal Flow @ 1000 PSI (1,775 rpm) on 4 cP		Max Continuous Pressure
Pump Model		Inch	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD	PSI
Viking Pump®	GB-41430	2" SAE & 2" NPT	105	3620	100	3455	96	3311	92	3180	89	3061	1500
Competitor	4900-10	2" NPT	64	2194	60	2057	56	1920	52	1783	49	1680	1440
Competitor	4900-15	2" NPT	96	3291	92	3154	88	3017	83	2846	79	2709	1165
Viking Pump [®]	GB-41440	3" SAE & 2" NPT	136	4691	130	4467	124	4275	120	4144	-	-	750
Competitor	4900-20	2" NPT	129	4423	124	4251	119	4080	114	3909	-	-	875
Competitor	4900-25	2" NPT	162	5554	156	5349	150	5143	-	-	-	-	700

* 2" and 3" SAE ports use J518 Code 61 SAE flange ports.

For more information, visit vikingpump.com/drop-in-replacement

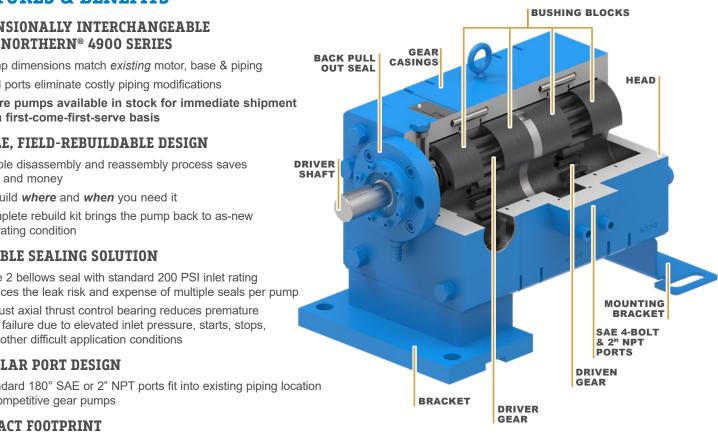

REPLACEABLE INTERNALS

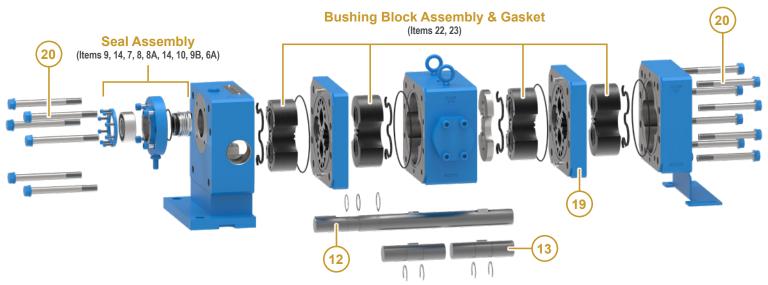

Item	Name of Part	Seal Kit	Complete Rebuild Kit	ltem	Name of Part	Seal Kit	Complete Rebuild Kit
1	Bracket			14A	Retaining Ring (Seal)	1	✓
6	Seal Holder			14B	Retaining Ring (Gears)		1
6 A	Cap Screws	\checkmark	1	15	Gear Pin		√
7	Seal Holder Oring	1	1	19	Casing & Gear Set		√
8	Mech Seal - FKM/Sil- Cab	1	1	20	Cap Screws (Bracket)		√
8A	Seal Washer	1	√	20	Cap Screws (Head)		√
9	Dbl Row Ball Bearing	1	√	20A	Lock Washer		√
9A	Bearing End Cap			22	Bushing Assembly		√
9B	Cap Screws	1	1	23	Gasket		√
10	Beveled Retaining Ring	1	1	24	Separation Plate Spacer		
11	Section Orings		1	26	Shaft Key		√
12	Driver Shaft		1	27	Head		
13	Driven Shaft		1	29	Separation Plate - With Ports		
14	Retaining Ring	1	1				

NOTE: Some items included in the rebuild kit not called out in above image. Contact your Viking Pump® representative for additional Rebuild Kit details.



VIKING PUMP, INC. A Unit of IDEX Corporation 406 State Street Cedar Falls, Iowa 50613 U.S.A. vikingpump.com CONTACT YOUR VIKING PUMP® OIL & LACT PUMP SPECIALISTS



vikingpump.com/drop-in-replacement