- ♦ Heavy duty refrigerated bases with drawer configurations to accommodate 6" x 12" x 20" hotel pans.
- ♦ Modular design to be attached to Hestan Commercial rangetops
 - o Sealed Burner Rangetops o Open Burners
 - o Griddles (Manual and Thermostatically controlled)
 - o Charbroilers
 - o Hot Tops
 - o French Tops
 - o Planchas
 - o Combination Rangetops


Full Extention Drawer Slides



Compressor Compartment

♦ LED temperature display

- ♦ Heavy duty drawer slide system with full extension. Each can withstand 275 lbs
- ♦ Removable drawer slide for cleaning or simple replacement
- ♦ Heavy duty top insulation for maximum heat protection
- ♦ Available in self-contained (S) or remote (R) models



- ♦ Available from 36" to 108" wide configurations
- ♦ Heavy gauge welded body construction
- ♦ Stainless front, sides, inner liner, back and bottom
- Zamak die cast handle for each drawer
- ♦ Snap-in magnetic gasket
- ♦ 6" height adjustable legs


















OPTIONS —

- ♦ Color (contact sales department for available colors)
- ♦ Left or right compressor for self contained units
- ♦ Left or right rear or side stub out for remote units
- ♦ Solid Top with marine edge
- 6" height adjustable casters. Front casters with brakes.
- ♦ Curb base



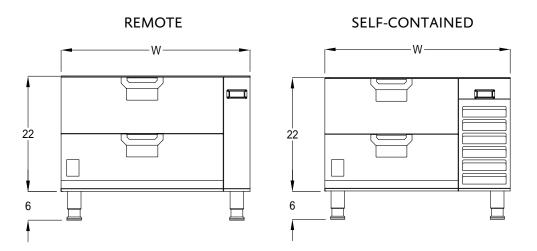

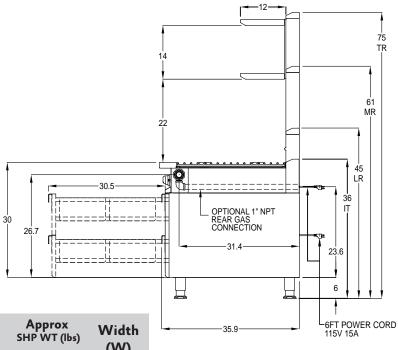

Model	Description	#Pans/Drawers		Btu's		Amps		HP	Approx SHP WT (lbs)		Width
		R	S	R	S	R	S	S	R	S	(W)
HRB36	36" Refrigerated Base	4/2	4/2	1200	1740	1.6	6.7	1/5	350	440	36"
HRB48	48" Refrigerated Base	6/2	4/2	1200	1740	1.6	7.3	1/5	450	540	48"
HRB54	54" Refrigerated Base	6/4	4/2	1800	1740	1.8	7.3	1/5	500	590	54 ["]
HRB6o	60" Refrigerated Base	8/4	6/4	2000	2860	2	10.2	1/4	550	640	6o"
HRB72	72" Refrigerated Base	8/4	8/4	2400	2860	3.2	11	1/4	650	740	72"
HRB84	84" Refrigerated Base	10/6	10/4	3000	2860	3.4	11	1/4	750	840	84"
HRB <u></u> 96	96" Refrigerated Base	12/6	12/6	3400	3520	4.2	12.9	1/3	850	940	96"
HRB108	108" Refrigerated Base	14/6	12/6	3400	4500	4.2	18.2	1/2	950	1040	108″

REFRIGERANT TYPE: R448A

ELECTRICAL: 120 volts, 20 amps, 60Hz for self-contained models

GAS: No gas requirement

VENTILATION: No ventilation requirement



R = Remote S = Self-contained

Note: Hestan Commercial products are not approved or recommended for residential use. Hestan Commercial Corporation reserves the right to change materials and specifications without notice. Specify type of gas when ordering. Specify altitude when above 2,000 ft.





